

78LXXM

LINEAR INTEGRATED CIRCUIT


3-TERMINAL 0.2A POSITIVE VOLTAGE REGULATOR

DESCRIPTION

The Contek 78LXXM family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 200mA.


FEATURES

- *Output current up to 200mA
- *Fixed output voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- *Thermal overload shutdown protection
- *Short circuit current limiting

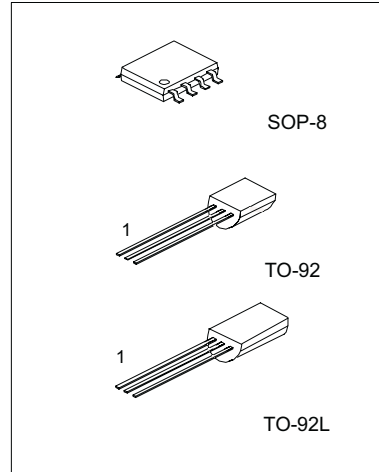

SOP-8: 1:Output 2,3,6,7:GND 8:Input
4,5:N.C.
TO-92: 1:Output 2:GND; 3:Input
TO-92L: 1:Output 2:GND; 3:Input

TEST CIRCUIT

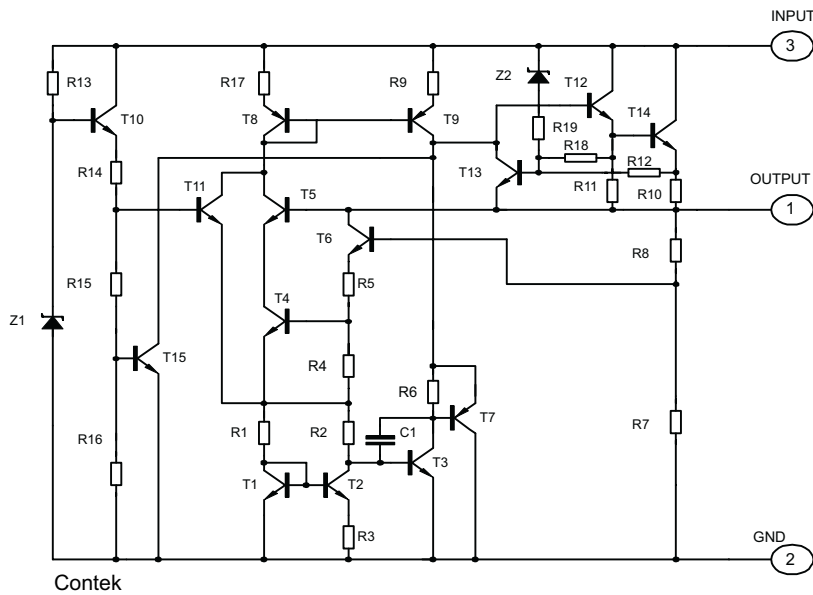

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

78LXXM

LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Input voltage(for Vo=5~9V) (for Vo=12~24V)	Vi		30	V
	Vi		35	V
Output Current	Io		200	mA
Power Dissipation	PD			
		SOP-8	300	mW
		TO-92	300	
TO-92L	500			
Operating Junction Temperature Range	TOPR	-20	+150	C
Storage Temperature Range	TSTG	-55	+150	C

Contek 78L05M ELECTRICAL CHARACTERISTICS

(Vi=10V, Io=40mA, 0 C <Tj<125 C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25 C	4.9	5.0	5.1	V
		7V<=Vi<=20V,Io=1mA - 40mA	4.9		5.1	V
		7V<=Vi<=VMAX Io=1mA-200mA	4.9		5.1	V (note 2)
Load Regulation	ΔVo	Tj=25 C,Io=1mA - 100mA		11	60	mV
		Tj=25 C,Io=1mA - 40mA		5.0	30	mV
Line regulation	ΔVo	7V<=Vi<=20V,Tj=25 C		8	150	mV
		8V<=Vi<=20V,Tj=25 C		6	100	mV
Quiescent Current	Iq			2.0	5.5	mA
Quiescent Current Change	ΔIq	8V<=Vi<=20V			1.5	mA
		1mA<=Vi<=40mA			0.1	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		40		uV
Temperature coefficient of Vo	ΔVo/ΔT	Io=5mA		-0.65		mV/ C
Ripple Rejection	RR	8V<=Vi<=20V,f=120Hz,Tj=25 C	41	80		dB
Dropout Voltage	Vd	Tj=25 C		1.7		V

Contek 78L06M ELECTRICAL CHARACTERISTICS

(Vi=12V, Io=40mA, 0 C <Tj<125 C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25 C	5.75	6.0	6.25	V
		8.5V<=Vi<=20V,Io=1mA - 40mA	5.7		6.3	V
		8.5V<=Vi<=VMAX, Io=1mA - 200mA	5.7		6.3	V (note 2)
Load Regulation	ΔVo	Tj=25 C,Io=1mA - 100mA		12.8	80	mV
		Tj=25 C,Io=1mA - 70mA		5.8	40	mV
Line regulation	ΔVo	8.5V<=Vi<=20V,Tj=25 C		64	175	mV
		9V<=Vi<=20V,Tj=25 C		54	125	mV
Quiescent Current	Iq			3.9	6.0	mA
Quiescent Current Change	ΔIq	9V<=Vi<=20V			1.5	mA



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

78LXXM

LINEAR INTEGRATED CIRCUIT

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	ΔI_q	1mA \leq V _I \leq 40mA			0.1	mA
Output Noise Voltage	V _N	10Hz \leq f \leq 100kHz		49		μ V
Temperature coefficient of V _o	$\Delta V_o/\Delta T$	I _o =5mA		0.75		mV/ C
Ripple Rejection	RR	10V \leq V _I \leq 20V, f=120Hz, T _j =25 C	40	46		dB
Dropout Voltage	V _d	T _j =25 C		1.7		V

Contek 78L08M ELECTRICAL CHARACTERISTICS

(V_I=14V, I_o=40mA, 0 C<T_j<125 C, C₁=0.33 μ F, C_o=0.1 μ F, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _o	T _j =25 C	7.7	8.0	8.3	V
		10.5V \leq V _I \leq 23V, I _o =1mA - 40mA	7.6		8.4	V
		10.5V \leq V _I \leq V _{MAX} , I _o =1mA - 200mA	7.6		8.4	V (note 2)
Load Regulation	ΔV_o	T _j =25 C, I _o =1mA - 100mA		15	80	mV
		T _j =25 C, I _o =1mA - 70mA		8.0	40	mV
Line regulation	ΔV_o	10.5V \leq V _I \leq 23V, T _j =25 C		10	175	mV
		11V \leq V _I \leq 23V, T _j =25 C		8	125	mV
Quiescent Current	I _q			2.0	5.5	mA
Quiescent Current Change	ΔI_q	11V \leq V _I \leq 23V			1.5	mA
	ΔI_q	1mA \leq V _I \leq 40mA			0.1	mA
Output Noise Voltage	V _N	10Hz \leq f \leq 100kHz		49		μ V
Temperature coefficient of V _o	$\Delta V_o/\Delta T$	I _o =5mA		0.75		mV/ C
Ripple Rejection	RR	11V \leq V _I \leq 23V, f=120Hz, T _j =25 C	39	70		dB
Dropout Voltage	V _d	T _j =25 C		1.7		V

Contek 78L09M ELECTRICAL CHARACTERISTICS

(V_I=15V, I_o=40mA, 0 C<T_j<125 C, C₁=0.33 μ F, C_o=0.1 μ F, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V _o	T _j =25 C	8.64	9.0	9.36	V
		11.5V \leq V _I \leq 24V, I _o =1mA - 40mA	8.55		9.45	V
		11.5V \leq V _I \leq V _{MAX} , I _o =1mA - 200mA	8.55		9.45	V (note 2)
Load Regulation	ΔV_o	T _j =25 C, I _o =1mA - 100mA		20	90	mV
		T _j =25 C, I _o =1mA - 40mA		10	45	mV
Line regulation	ΔV_o	11.5V \leq V _I \leq 24V, T _j =25 C		90	200	mV
		13V \leq V _I \leq 24V, T _j =25 C		100	150	mV
Quiescent Current	I _q			2.0	6.0	mA
Quiescent Current Change	ΔI_q	13V \leq V _I \leq 24V			1.5	mA
	ΔI_q	1mA \leq V _I \leq 40mA			0.1	mA
Output Noise Voltage	V _N	10Hz \leq f \leq 100kHz		49		μ V
Temperature coefficient of V _o	$\Delta V_o/\Delta T$	I _o =5mA		0.75		mV/ C
Ripple Rejection	RR	12V \leq V _I \leq 23V, f=120Hz, T _j =25 C	38	44		dB
Dropout Voltage	V _d	T _j =25 C		1.7		V



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

78LXXM

LINEAR INTEGRATED CIRCUIT

Contek 78L10M ELECTRICAL CHARACTERISTICS

($V_I=16V, I_O=40mA, 0\text{ C} < T_J < 125\text{ C}, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	T _J =25 C	9.6	10.0	10.4	V
		12.5V<=V _I <=23V, I _O =1mA - 40mA	9.5		10.5	V
		12.5V<=V _I <=V _{MAX} , I _O =1mA - 200mA	9.5		10.5	V (note 2)
Load Regulation	ΔVo	T _J =25 C, I _O =1mA - 100mA		20	94	mV
		T _J =25 C, I _O =1mA - 70mA		10	47	mV
Line regulation	ΔVo	12.5V<=V _I <=23V, T _J =25 C		100	220	mV
		14V<=V _I <=23V, T _J =25 C		200	170	mV
Quiescent Current	I _q			4.2	6.5	mA
Quiescent Current Change	ΔI _q	12.5V<=V _I <=23V			1.5	mA
	ΔI _q	1mA<=V _I <=40mA			0.1	mA
Output Noise Voltage	V _N	10Hz<=f<=100kHz		74		μV
Temperature coefficient of Vo	ΔVo/ΔT	I _O =5mA		0.95		mV/ C
Ripple Rejection	RR	15V<=V _I <=23V, f=120Hz, T _J =25 C	38	43		dB
Dropout Voltage	V _d	T _J =25 C		1.7		V

Contek 78L12M ELECTRICAL CHARACTERISTICS

($V_I=19V, I_O=40mA, 0\text{ C} < T_J < 125\text{ C}, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	T _J =25 C	11.5	12	12.5	V
		14.5V<=V _I <=27V, I _O =1mA - 40mA	11.4		12.6	V
		14.5V<=V _I <=V _{MAX} , I _O =1mA - 200mA	11.4		12.6	V (note 2)
Load Regulation	ΔVo	T _J =25 C, I _O =1mA - 100mA		25	150	mV
		T _J =25 C, I _O =1mA - 40mA		12	75	mV
Line regulation	ΔVo	14.5V<=V _I <=27V, T _J =25 C		25	300	mV
		16V<=V _I <=27V, T _J =25 C		20	250	mV
Quiescent Current	I _q			2.0	6.0	mA
Quiescent Current Change	ΔI _q	16V<=V _I <=27V			1.5	mA
	ΔI _q	1mA<=V _I <=40mA			0.1	mA
Output Noise Voltage	V _N	10Hz<=f<=100kHz		80		μV
Temperature coefficient of Vo	ΔVo/ΔT	I _O =5mA		-1.0		mV/ C
Ripple Rejection	RR	15V<=V _I <=25V, f=120Hz, T _J =25 C	37	65		dB
Dropout Voltage	V _d	T _J =25 C		1.7		V



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

78LXXM

LINEAR INTEGRATED CIRCUIT

Contek 78L15M ELECTRICAL CHARACTERISTICS

($V_I=23V, I_o=40mA, 0\text{ C} < T_j < 125\text{ C}, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25\text{ C}$	14.4	15	15.6	V
		$17.5V \leq V_I \leq 30V, I_o=1mA - 40mA$	14.25		15.75	V
		$17.5V \leq V_I \leq V_{MAX}, I_o=1mA - 200mA$	14.25		15.75	V (note 2)
Load Regulation	ΔV_o	$T_j=25\text{ C}, I_o=1mA - 100mA$		20	150	mV
		$T_j=25\text{ C}, I_o=1mA - 70mA$		25	150	mV
Line regulation	ΔV_o	$17.5V \leq V_I \leq 30V, T_j=25\text{ C}$		25	150	mV
		$20V \leq V_I \leq 30V, T_j=25\text{ C}$		15	75	mV
Quiescent Current	I_q			2.2	6.5	mA
Quiescent Current Change	ΔI_q	$20V \leq V_I \leq 30V$			1.5	mA
	ΔI_q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		90		μV
Temperature coefficient of V_o	$\Delta V_o / \Delta T$	$I_o=5mA$		-1.3		mV/ C
Ripple Rejection	RR	$18.5V \leq V_I \leq 28.5V, f=120Hz, T_j=25\text{ C}$	34	63		dB
Dropout Voltage	V_d	$T_j=25\text{ C}$		1.7		V

Contek 78L18M ELECTRICAL CHARACTERISTICS

($V_I=27V, I_o=40mA, 0\text{ C} < T_j < 125\text{ C}, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25\text{ C}$	17.3	18	18.7	V
		$21V \leq V_I \leq 33V, I_o=1mA - 40mA$	17.1		18.9	V
		$21V \leq V_I \leq V_{MAX}, I_o=1mA - 200mA$	17.1		18.9	V (note 2)
Load Regulation	ΔV_o	$T_j=25\text{ C}, I_o=1mA - 100mA$		30	170	mV
		$T_j=25\text{ C}, I_o=1mA - 40mA$		15	85	mV
Line regulation	ΔV_o	$21V \leq V_I \leq 33V, T_j=25\text{ C}$		145	300	mV
		$22V \leq V_I \leq 33V, T_j=25\text{ C}$		135	250	mV
Quiescent Current	I_q			2.0	6.0	mA
Quiescent Current Change	ΔI_q	$21V \leq V_I \leq 33V$			1.5	mA
	ΔI_q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		150		μV
Temperature coefficient of V_o	$\Delta V_o / \Delta T$	$I_o=5mA$		-1.8		mV/ C
Ripple Rejection	RR	$23V \leq V_I \leq 33V, f=120Hz, T_j=25\text{ C}$	34	48		dB
Dropout Voltage	V_d	$T_j=25\text{ C}$		1.7		V



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

78LXXM

LINEAR INTEGRATED CIRCUIT

Contek 78L24M ELECTRICAL CHARACTERISTICS


($V_i=33V, I_o=40mA, 0\text{ C} < T_j < 125\text{ C}, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25 C	23	24	25	V
		27V<=Vi<=38V, Io=1mA - 40mA	22.8		25.2	V
		27V<=Vi<=VMAX, Io=1mA - 200mA	22.8		25.2	V (note 2)
Load Regulation	ΔVo	Tj=25 C, Io=1mA - 100mA		40	200	mV
		Tj=25 C, Io=1mA - 40mA		20	100	mV
Line regulation	ΔVo	27V<=Vi<=38V, Tj=25 C		160	300	mV
		28V<=Vi<=38V, Tj=25 C		150	250	mV
Quiescent Current	Iq			2.2	6.0	mA
Quiescent Current Change	ΔIq	27V<=Vi<=38V			1.5	mA
	ΔIq	1mA<=Vi<=40mA			0.1	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		200		uV
Temperature coefficient of Vo	ΔVo/ΔT	Io=5mA		-2.0		mV/ C
Ripple Rejection	RR	27V<=Vi<=38V, f=120Hz, Tj=25 C	34	45		dB
Dropout Voltage	Vd	Tj=25 C		1.7		V

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking , lead length of the package and copper pattern of PCB. The data above represent pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

APPLICATION CIRCUIT

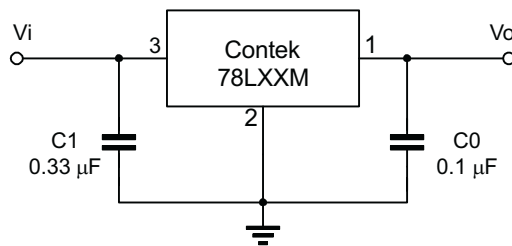

Note 1: To specify an output voltage, substitute voltage value for " XXM".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

TYPICAL PERFORMANCE CHARACTERISTICS

Fig.1 Ambient temperature vs. Power dissipation




Fig.2 Contek78L05M Output Voltage vs. Ambient temperature




Fig.3 Contek78L12M Power dissipation vs. Ambient temperature




Fig.4 Output Characteristics (I_p=0mA, T_j=25°C)




Fig.5 Contek78L05M Dropout Characteristics (T_j=25°C)




Fig.6 Short Circuit output current (T_j=25°C)




Fig.7 Contek78L12/24M quiescent current vs output current (T_j=25°C)




Fig.8 Contek78L05M Quiescent Current vs. Input Voltage (I_o=0mA, T_j=25°C)




Fig.9 Peak output current vs Dropout voltage difference

