

LAG668

LINEAR INTEGRATED CIRCUIT


RADIO AND CASSETTE RECORDER CIRCUIT

DESCRIPTION


The Contek LAG668 is a monolithic integrated circuit, designed for portable radio cassette.

FEATURES

*1-Chip IC for headphone stereo

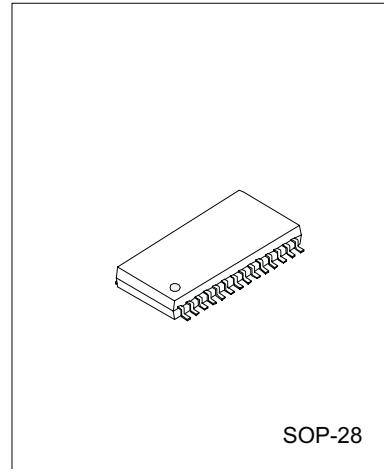


BLOCK DIAGRAM

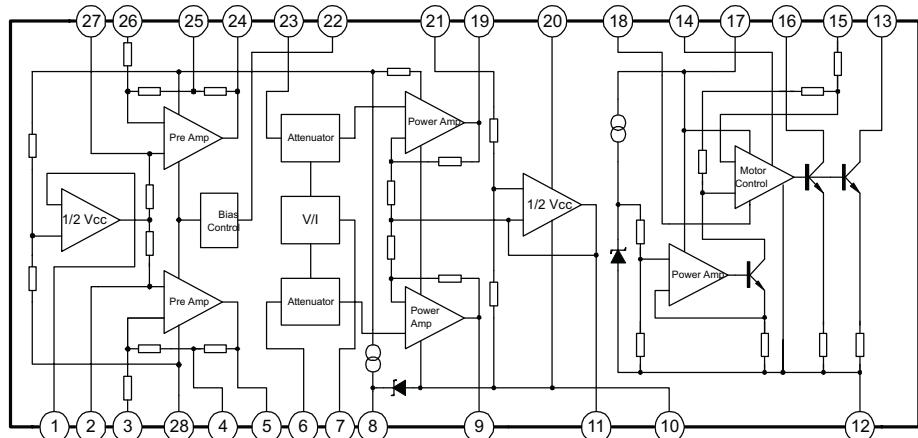

LAG668 LINEAR INTEGRATED CIRCUIT

PIN CONFIGURATION

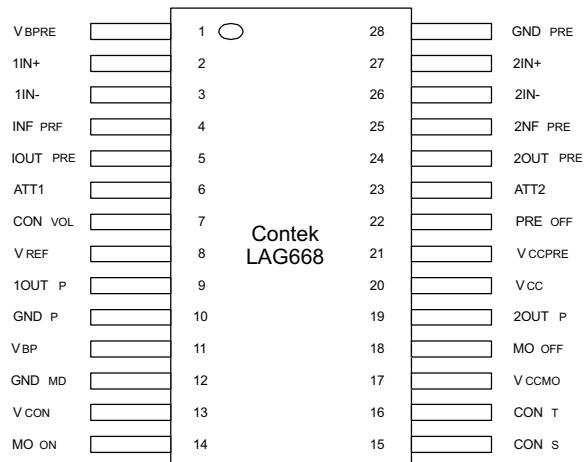

PIN NO.	SYMBOL	DESCRIPTION	PIN NO.	SYMBOL	DESCRIPTION
1	VBPRE	Pre Amp Bias Voltage	15	CONs	Speed Control
2	1 IN+	Channel 1 + Input	16	CONT	Torqu Control
3	1 IN -	Channel 1 - Input	17	VCCMO	Motor Power Control
4	1 NFPRE	Feedback 1	18	MOOFF	Motor Forced Stop
5	1 OUTPRE	Pre Amp Output 1	19	2 OUTP	Power Amp Output 2
6	ATT 1	Attenuator 1	20	Vcc	Supply Voltage
7	CONVOL	Volume Control	21	VCCPRE	Supply Voltage
8	VREF	Reference Voltage	22	PREOFF	Pre Amp Off
9	1 OUTP	Power Amp Output 1	23	ATT 2	Attenuator 2
10	GNDP	Power GND	24	2 OUTPRE	Pre Amp Output 2
11	VBP	Power Amp Bias Voltage	25	2 NFPRE	Feedback 2
12	GNDMD	Motor GND	26	2 IN-	Channel 2 - Input
13	VCON	Motor Control Voltage	27	2 IN+	Channel 2 + Input
14	MOON	Motor Forced Start	28	GNDPRE	Pre GND

LAG668

LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS($T_a=25\text{ }^{\circ}\text{C}$)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V _{cc}	-0.3~+7.5	V
Power Dissipation	P _d	750	mW
Operating Voltage	V _{op}	2~5	V
Operating Temperature	T _{opr}	-20~+65	C
Storage Temperature	T _{stg}	-40~+125	C

AMPLIFIER ELECTRICAL CHARACTERISTICS($T_a=25\text{ }^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Current	I _{cc}	V _{in} =0V, I _M =0mA		18	25	mA
PRE-AMPLIFIER						
Open Loop Gain	G _{vo}	V _o =-10dBm, R _L =		72		dB
Close Loop Gain	G _{vc}	V _o =-10dBm	40	42	44	dB
Maximum Output Voltage	V _{om}	THD=10%	0.45	0.6		V _{rms}
Total Harmonic Distortion	THD	V _{out} =100mV _{rms}		0.05	0.5	%
Output Noise Voltage	V _{on}	V _{in} =0, R _g =2.2k, BPF(30~20k)		150	300	μV _{rms}
Input Impedance	Z _{in}	V _{out} =-10dBm	18	22		kΩ
Cross Talk between CH	CT	R _g =2.2k, V _{out} =-10dBm	30			dB
Output Voltage when Pre-Off	V _{ooff}	V _{in} =100mV _{rms}			-50	dB
Output Impedance when Pre-Off	R _{ooff}			10		kΩ
Input Impedance when Pre-Off	R _{loff}			10		kΩ
Attenuator						
Maximum Input Voltage	V _{imax}		0.2			V _{rms}
Maximum Attenuation	V _{amax}	V _{cont} =Min	66			dB
Attenuation Error	V _{aerr}	V _{cont} =Max		0		dB
Input Impedance	Z _{ia}		200			kΩ
Control Terminal Input Impedance	Z _{icot}		100			kΩ
Power Amplifier						
Voltage Gain	G _V	P _{out} =5mW	36	38	40	dB
Channel Voltage Difference	ΔG _V	V _{cont} =Max		0	3	dB
Maximum Output Power I	P _{om 1}	THD=10%, R _L =32Ω	20	28		mW
Maximum Output Power II	P _{om 2}	THD=10%, R _L =16Ω	30			mW
Total Harmonic Distortion	THD	P _{out} =5mW		0.5	2	%
Cross Talk between CH	CT	P _{out} =5mW	20	30		dB
Output Noise Voltage	V _{on}	R _g =2.2k, V _{cont} =Max		1	2	mV _{rms}
Ripple Rejection	RR	V _{cc} =3V, 100Hz, 100mV _{p-p}	31	37		dB
Pre + Pulse Boost + Power Noise	V _{nto}	V _{in} =0V, R _g =2.2k, V _{cont} =Max*		3	6	mV _{rms}

*V_{cc}=3V, f=1kHz, R_L=16Ω, unless otherwise specified.



Contek Microelectronics Co.,Ltd.


<http://www.contek-ic.com> E-mail:sales@contek-ic.com

LAG668

LINEAR INTEGRATED CIRCUIT

MOTOR ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Current Consumption	IMC			3	5	mA
Starting Current	IMS		500			mA
Reference Voltage	Vref		0.72	0.8	0.87	V
Reference Voltage Change I	Vref 1	Vcc=2.1~5V		0.05		%/V
Reference Voltage Change II	Vref 2	Im=25~250mA		0.01		%/mA
Reference Voltage Change III	Vref 3	Ta=-10~50 °C		0.01		%/ °C
Current Factor	K		32	38	43	
Current Factor Change I	K 1	Vcc=2.1~5V		0.5		%/V
Current Factor Change II	K 2	Im=25~250mA		0.05		%/mA
Current Factor Change III	K 3	Ta=-10~50 °C		0.02		%/ °C
Saturation Voltage at Forced ON	VCEsa	IM=200mA, Pin 14=Vcc			0.6	V
Input Impedance at Forced ON Pin	Rion			5.6		KΩ
Leakage Current at Forced OFF	IML				200	μA
Input Impedance at Forced OFF Pin	Ricon			33		KΩ

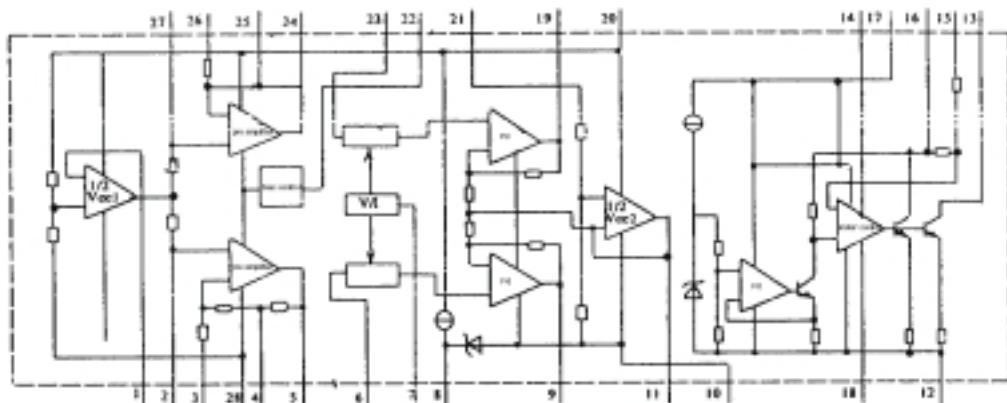

LAG668

LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT 1

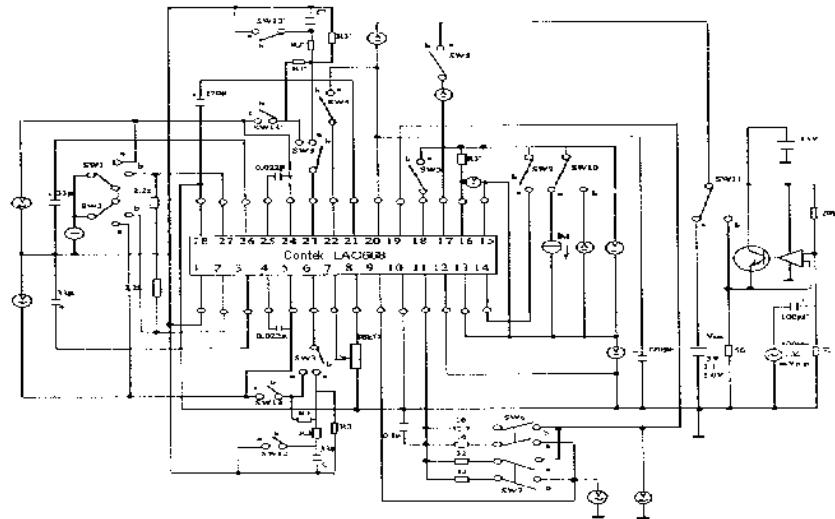

NOTE1 : SW12,SW12

R1,R =33kΩ

R2,R2 =5.1kΩ

R3,R3 =200kΩ


R2,R2,=5.1kΩ

C1,C =0.1μF

NOTE2 : See figure 1/2 for SW

LAG668 LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT 2

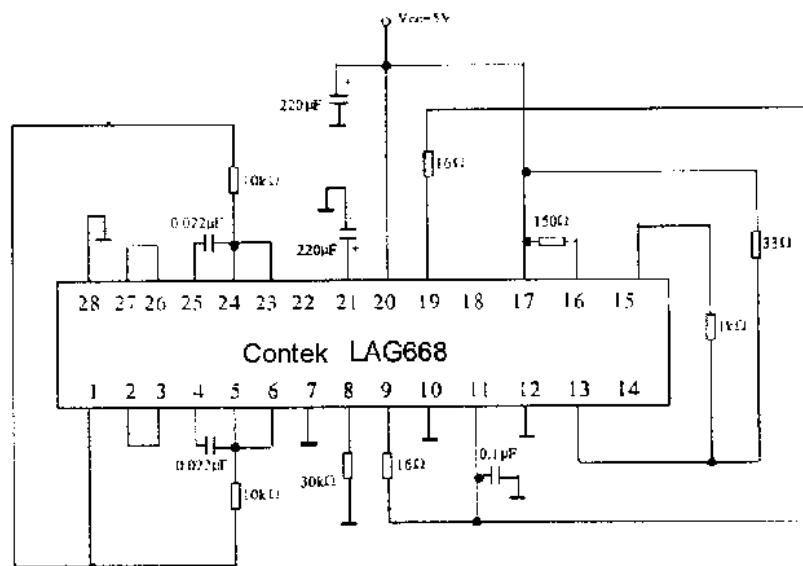

LAG668 LINEAR INTEGRATED CIRCUIT

FIGURE 1

Item	Symbol	SW No.												TEST CONDITION	
		1	2	3,3	4	5	6	7	8	9	10	11	12,12	13,13	Vcc=3V,f=1kHz,RL=16Ω
AMP															
Supply Current	Icc	c	c	a	b	b	a	b	b	b	a	a	a	I _m =0mA	
Pre AMP															
Open Loop Gain	Gvo	b	b	b	b	b	a	b	b	b	a	a	b	b	V _o =244mV
Maximum Output Voltage	Vom	b	b	b	b	b	a	a	b	b	a	a	b	b	THD=10%
Total Harmonic Distortion	THD	b	b	b	b	b	a	b	b	b	a	a	b	b	V _o =400mV
Output Noise Voltage	Von	c	c	b	b	b	a	b	b	b	a	a	b	b	B.P.F.(30-20kHz)
Cross Talk between CH	CT	b-c	c-b	b	b	b	a	b	b	b	a	a	b	b	V _o =244mV
Output Voltage when Pre-Off	Voff	b	b	a	b	a	b	b	b	b	a	a	b	b	V _{in} =100mV
Attenuator															
Maximum Input Voltage	Vimax	a	a	c	a	b	a	b	b	b	a	a	b	a	V _r =Min, THD=10%,
Maximum Attenuation	Vamax	a	a	c	a	b	a	b	b	b	a	a	b	a	
Power AMP															
Voltage Gain	GV	a	a	c	a	b	a	b	b	b	a	a	b	a	P _{out} =5mV
Channel Voltage Difference	QV	a	a	c	a	b	a	b	b	b	a	a	b	a	VR=MAX
Maximum Output Power I	Pom 1	a	a	c	a	b	b	a	b	b	a	a	b	a	RL=32Ω,THD=10%
Maximum Output Power II	Pom 2	a	a	c	a	a	a	b	b	b	a	a	b	a	RL=16Ω,THD=10%



Contek Microelectronics Co.,Ltd.

7

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

LAG668 LINEAR INTEGRATED CIRCUIT

FIGURE 2

Item	Symbol	SW No.													TEST CONDITION
		1	2	3,3	4	5	6	7	8	9	10	11	12,12	13,13	
POWER AMP															
Total Harmonic Distortion	THD	a	c	c	a	b	a	b	b	b	a	a	b	a	Pout=5mV
Cross Talk between CH	CT	a-c	c-a	c	a	b	a	b	b	b	a	a	b	a	Pout=5mV
Output Noise Voltage	Von	c	c	c	b	b	a	b	b	b	a	a	b	a	VR=MIN
Ripple Rejection	RR	c	c	b	a	b	a	b	b	b	a	a	b	b	VR=MAX
Pre + Pulse Boost + Power Noise	Vnto	c	c	a	b	b	a	b	b	b	a	a	b	a	VR=MAX, BB ON
Motor															
Current Consumption	IMC	c	c	a	a	b	a	b	a	b	a	a	a	a	Im=0mA
Starting Current	IMS	c	c	a	a	b	a	b	a	b	a	a	a	a	
Reference Voltage	Vref	c	c	a	a	b	a	b	a	b	a	a	a	a	Im=100mA
Reference Voltage Change I	Vref 1	c	c	a	a	b	a	b	a	b	a	a	a	a	Im=100mA, Vcc=2.1-5V
Reference Voltage Change II	Vref 2	c	c	a	a	b	a	b	a	b	a	a	a	a	Vcc=3V, Im=25-250mA
Saturation Voltage at Forced ON	VCEsa	c	c	a	a	b	a	b	a	b	a	a	a	a	Im=200mA
Input Impedance at Forced OFF Pin	Ricon	c	c	a	a	a	a	b	a	b	a	a	a	a	

*Note: a=ON, b=OFF



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com