


### LOW NOISE QUAD J-FET OPERATIONAL AMPLIFIER

#### DESCRIPTION


The Contek TL074 is a high speed J-FET input quad operational amplifier. It incorporates well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit. The device features high slew rates, low input bias and offset current, and low offset voltage temperature coefficient.

#### FEATURES


- \*Low power consumption
- \*Wide common-mode (up to  $V_{CC}^+$ ) and differential voltage range
- \*Low input bias and offset current
- \*Low noise  $e_n = 15nV / \sqrt{Hz}$ (typ)
- \*Output short-circuit protection
- \*High input impedance J-FET input stage
- \*Low harmonic distortion:0.01%(typ)
- \*Internal frequency compensation
- \*Latch up free operation
- \*High slewrate:13V/ $\mu$ s(typ)

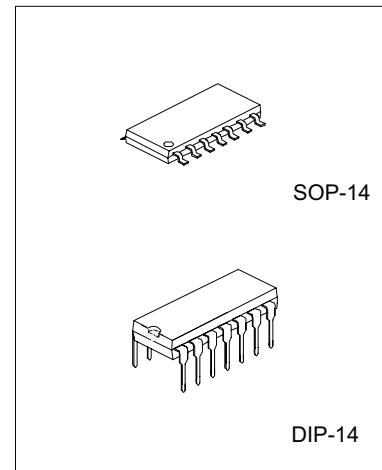

#### PIN CONFIGURATIONS

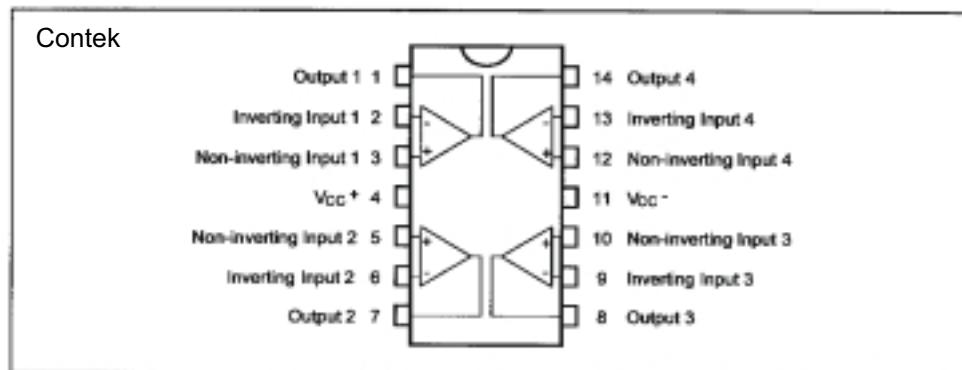

## SCHEMATIC DIAGRAM

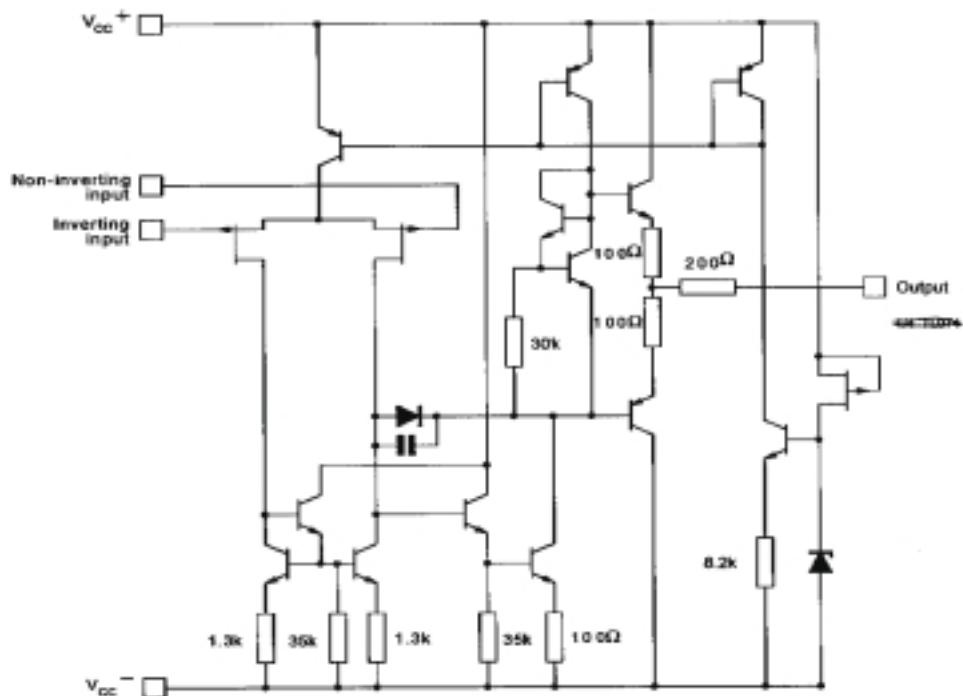

## ABSOLUTE MAXIMUM RATINGS(Ta=25 °C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage (note 1)	Vcc	+18	V
Input Voltage (note 2)	Vi	+15	V
Differential Input Voltage (note 3)	Vid	+30	V
Power Dissipation	Ptot	680	mW
Output Short-Circuit Duration (Note 4)		Infinite	
Operating Free Air Temperature	Toper	0 to 70	C
Storage Temperature	Tstg	5 to 150	C

- NOTES:
1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between Vcc- and Vcc+.
  2. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
  3. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
  4. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

# TL074

# LINEAR INTEGRATED CIRCUIT

Contek TL074C ELECTRICAL CHARACTERISTICS( V<sub>cc</sub>=+15V, T<sub>a</sub>=25 °C, unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Input Offset Voltage(R <sub>s</sub> =50Ω), T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	V <sub>io</sub>		3	10 13	mV
Temperature Coefficient of Input Offset Voltage	D <sub>vio</sub>		10		°V
Input Offset Current* T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	I <sub>io</sub>		5	100 10	pA nA
Input Bias Current* T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	I <sub>ib</sub>		30	200 20	pA nA
Input Common Mode Voltage	V <sub>icm</sub>	+11	-12~+15		V
Output Voltage Swing(R <sub>L</sub> =10kΩ) T <sub>a</sub> =25 °C, R <sub>L</sub> =2kΩ, T <sub>a</sub> =25 °C, R <sub>L</sub> =10kΩ T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub> , R <sub>L</sub> =2kΩ T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub> , R <sub>L</sub> =10kΩ	V <sub>opp</sub>	10 12 10 12	12 13.5		V
Large Signal Voltage Gain(R <sub>L</sub> =2kΩ, V <sub>o</sub> =+10V) T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	A <sub>vd</sub>	25 15	200		V/mV
Gain Bandwidth Product(T <sub>a</sub> =25 °C, R <sub>L</sub> =10kΩ, f=100kHz, V <sub>in</sub> =10mV, C <sub>L</sub> =100pF)	G <sub>BP</sub>	2	3		MHz
Input Resistance	R <sub>i</sub>		1012		Ω
Common Mode Rejection Ratio(R <sub>s</sub> =50Ω) T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	C <sub>MR</sub>	70 70	86		dB
Supply Voltage Rejection Ratio(R <sub>s</sub> =50Ω) T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	S <sub>VR</sub>	70 70	86		dB
Supply Current( no load) T <sub>a</sub> =25 °C T <sub>min</sub> <=T <sub>a</sub> <=T <sub>max</sub>	I <sub>cc</sub>		1.4	2.5 2.5	mA
Channel Separation(A <sub>v</sub> =100, T <sub>a</sub> =25 °C)	V <sub>01</sub> /V <sub>02</sub>		120		dB
Output Short-circuit Current	I <sub>os</sub>	10 10	40	60 60	mA
Slew Rate(V <sub>i</sub> =10V, R <sub>L</sub> =2kΩ, C <sub>L</sub> =100pF, T <sub>a</sub> =25 °C, unity gain)	S <sub>R</sub>	8	13		V/μs
Rise Time(V <sub>i</sub> =20mV, R <sub>L</sub> =2kΩ, C <sub>L</sub> =100pF, T <sub>a</sub> =25 °C, unity gain)	t <sub>r</sub>		0.1		μs
Overshoot Factor(V <sub>i</sub> =20mV, R <sub>L</sub> =2kΩ, C <sub>L</sub> =100pF, T <sub>a</sub> =25 °C, unity gain)	K <sub>ov</sub>		10		%
Total Harmonic Distortion(A <sub>v</sub> =20dB, f=1kHz R <sub>L</sub> =2kΩ, C <sub>L</sub> =100pF, T <sub>a</sub> =25 °C, V <sub>o</sub> =2Vpp)	T <sub>HD</sub>		0.01		%
Phase Margin			45		Degrees
Equivalent Input Noise Voltage(R <sub>s</sub> =100Ω, f=1kHz)	e <sub>n</sub>		15		

\*The Input bias currents are junction leakage currents, which approximately double for every 10 °C increase in the junction temperature.



Contek Microelectronics Co.,Ltd.

3

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

# TL074

# LINEAR INTEGRATED CIRCUIT

Contek TL074AC ELECTRICAL CHARACTERISTICS(  $V_{cc}=+15V$ ,  $T_a=25^{\circ}C$ , unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Input Offset Voltage( $R_s=50\Omega$ ), $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$V_{io}$		3	6 7	mV
Temperature Coefficient of Input Offset Voltage( $R_s=50\Omega$ )	$Dv_{io}$		10		$\mu V/C$
Input Offset Current* $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{io}$		5	100 4	pA nA
Input Bias Current* $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{ib}$		20	200 20	pA nA
Input Common Mode Voltage	$V_{icm}$	+11	-12~+15		V
Output Voltage Swing( $R_L=10k\Omega$ ) $T_a=25^{\circ}C$ , $R_L=2k\Omega$ , $T_a=25^{\circ}C$ , $R_L=10k\Omega$ $T_{min}\leq T_a \leq T_{max}$ , $R_L=2k\Omega$ $T_{min}\leq T_a \leq T_{max}$ , $R_L=10k\Omega$	$V_{opp}$	10 12 10 12	12 13.5		V
Large Signal Voltage Gain( $R_L=10k\Omega$ , $V_o=+-10V$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$Av_d$	50 25	200		V/mV
Gain Bandwidth Product( $T_a=25^{\circ}C$ , $R_L=10k\Omega$ , $C_L=100pF$ )	$GBP$	2	3		MHz
Input Resistance	$R_i$		$10^{12}$		$\Omega$
Common Mode Rejection Ratio( $R_s=50\Omega$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$CMR$	80 80	86		dB
Supply Voltage Rejection Ratio( $R_s=50\Omega$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$SVR$	80 80	86		dB
Supply Current(no load) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{cc}$		1.4	2.5 2.5	mA
Channel Separation( $Av=100$ , $T_a=25^{\circ}C$ )	$V_{o1}/V_{o2}$		120		dB
Output Short-circuit Current	$I_{os}$		10 10	40 60 60	mA
Slew Rate( $V_i=10V$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$SR$	8	13		V/ $\mu s$
Rise Time( $V_i=20mV$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$t_r$		0.1		$\mu s$
Overshoot Factor( $V_i=20mV$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$Kov$		10		%
Total Harmonic Distortion( $Av=20dB$ , $f=1kHz$ $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , $V_o=2Vpp$ )	$THD$		0.01		%
Phase Margin			45		Degrees
Equivalent Input Noise Voltage( $R_s=100\Omega$ , $f=1KHz$ )	$e_n$		15		

\*The Input bias currents are junction leakage currents, which approximately double for every  $10^{\circ}C$  increase in the junction temperature.



Contek Microelectronics Co.,Ltd.

4

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

# TL074

# LINEAR INTEGRATED CIRCUIT

Contek TL074BC ELECTRICAL CHARACTERISTICS(  $V_{cc}=+15V$ ,  $T_a=25^{\circ}C$ , unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Input Offset Voltage( $R_s=50\Omega$ ), $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$V_{io}$		1	3 5	mV
Temperature Coefficient of Input Offset Voltage( $R_s=50\Omega$ )	$Dv_{io}$		10		V/
Input Offset Current* $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{io}$		5	100 4	pA nA
Input Bias Current* $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{ib}$		20	200 20	pA nA
Input Common Mode Voltage	$V_{icm}$	+11	-12~+15		V
Output Voltage Swing( $R_L=10k\Omega$ ) $T_a=25^{\circ}C$ , $R_L=2k\Omega$ , $T_a=25^{\circ}C$ , $R_L=10k\Omega$ $T_{min}\leq T_a \leq T_{max}$ , $R_L=2k\Omega$ $T_{min}\leq T_a \leq T_{max}$ , $R_L=10k\Omega$	$V_{opp}$	10 12 10 12	12 13.5		V
Large Signal Voltage Gain( $R_L=10k\Omega$ , $V_o=+-10V$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$Av_d$	50 25	200		V/mV
Gain Bandwidth Product( $T_a=25^{\circ}C$ , $R_L=10k\Omega$ , $C_L=100pF$ )	$GBP$	2	3		MHz
Input Resistance	$R_i$		$10^{12}$		$\Omega$
Common Mode Rejection Ratio( $R_s=50\Omega$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$CMR$	80 80	86		dB
Supply Voltage Rejection Ratio( $R_s=50\Omega$ ) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$SVR$	80 80	86		dB
Supply Current(no load) $T_a=25^{\circ}C$ $T_{min}\leq T_a \leq T_{max}$	$I_{cc}$		1.4	2.5 2.5	mA
Channel Separation( $A_v=100$ , $T_a=25^{\circ}C$ )	$V_{o1}/V_{o2}$		120		dB
Output Short-circuit Current	$I_{os}$		10 10	40 60 60	mA
Slew Rate( $V_i=10V$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$SR$	8	13		V/ $\mu$ s
Rise Time( $V_i=20mV$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$t_r$		0.1		$\mu$ s
Overshoot Factor( $V_i=20mV$ , $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , unity gain)	$Kov$		10		%
Total Harmonic Distortion( $A_v=20dB$ , $f=1kHz$ $R_L=2k\Omega$ , $C_L=100pF$ , $T_a=25^{\circ}C$ , $V_o=2V_{pp}$ )	$THD$		0.01		%
Phase Margin			45		Degrees
Equivalent Input Noise Voltage( $R_s=100\Omega$ , $f=1KHz$ )	$e_n$		15		

\*The Input bias currents are junction leakage currents, which approximately double for every  $10^{\circ}C$  increase in the junction temperature.



Contek Microelectronics Co.,Ltd.


5

<http://www.contek-ic.com> E-mail:sales@contek-ic.com


**TL074**

# LINEAR INTEGRATED CIRCUIT


**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY**

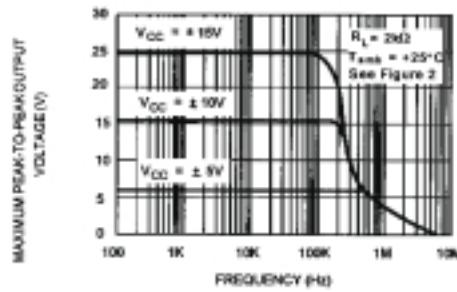


**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY**

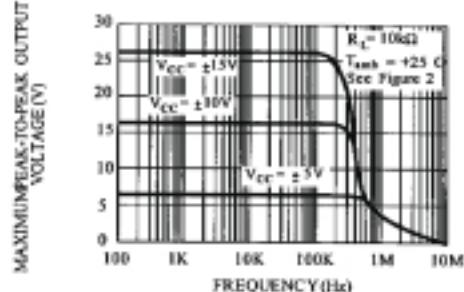


**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY**

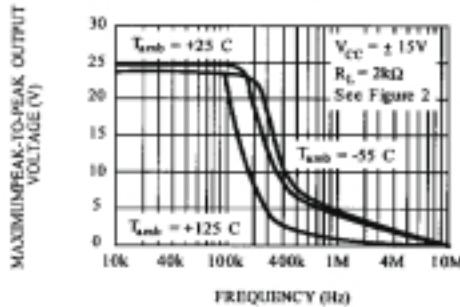


**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREE AIR TEMP.**

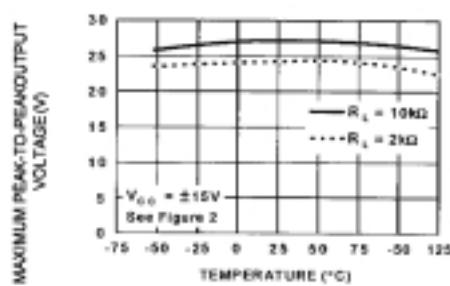

**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS LOAD RESISTANCE**

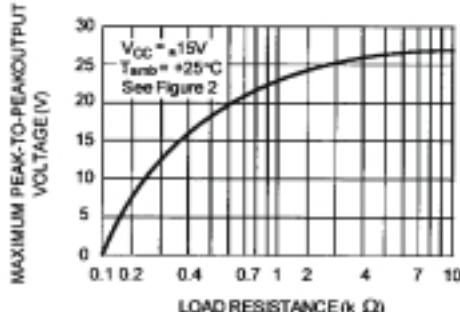

**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS SUPPLY VOLTAGE**

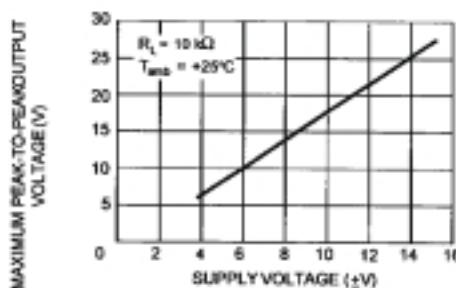


Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com


TL074

# LINEAR INTEGRATED CIRCUIT


INPUT BIAS CURRENT VERSUS  
FREE AIR TEMPERATURE

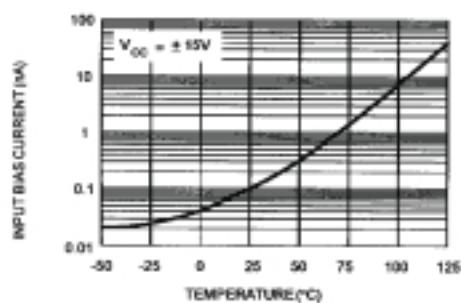


LARGE SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION VERSUS  
FREE AIR TEMPERATURE

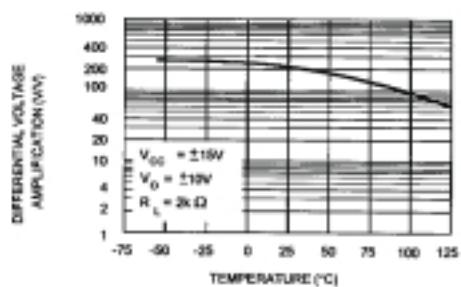


LARGE SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION AND PHASE  
SHIFT VERSUS FREQUENCY

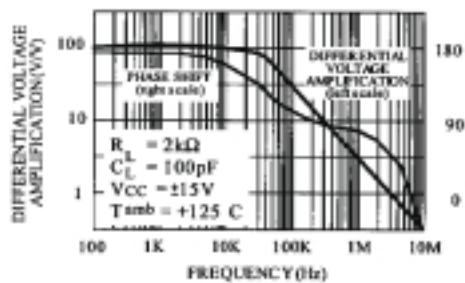


TOTAL POWER DISSIPATION VERSUS  
FREE AIR TEMPERATURE

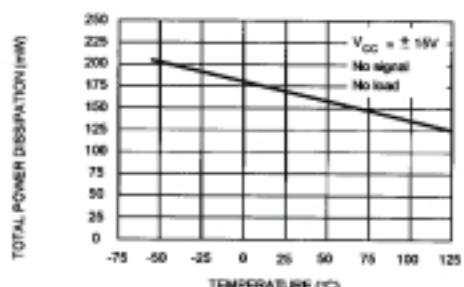

SUPPLY CURRENT PER AMPLIFIER  
VERSUS FREE AIR TEMPERATURE

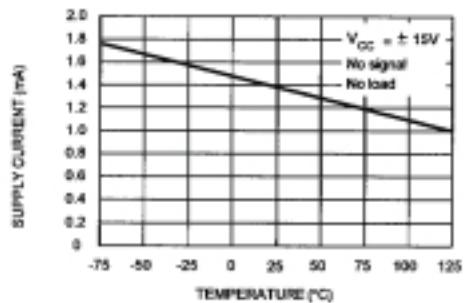

COMMON MODE REJECTION RATIO  
VERSUS FREE AIR TEMPERATURE

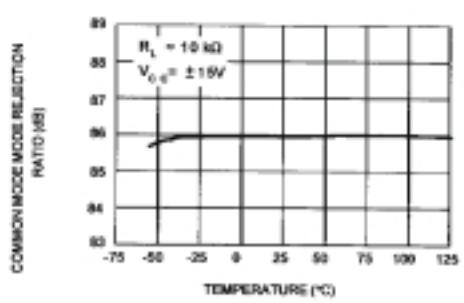


Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com


TL074

# LINEAR INTEGRATED CIRCUIT


VOLTAGE FOLLOWER LARGE SIGNAL PULSE RESPONSE

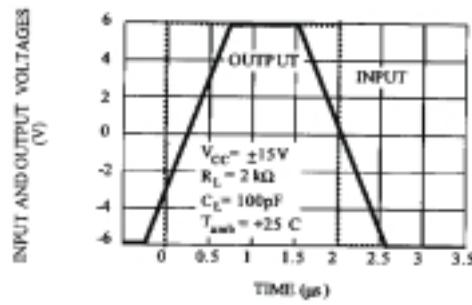


OUTPUT VOLTAGE VERSUS  
ELAPSED TIME

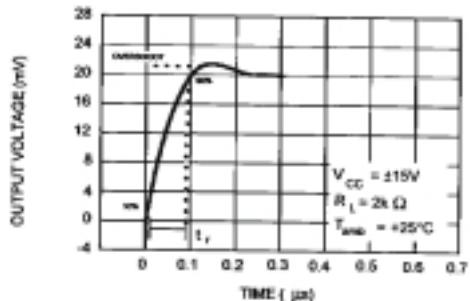

EQUIVALENT INPUT NOISE VOLTAGE  
VERSUS FREQUENCY

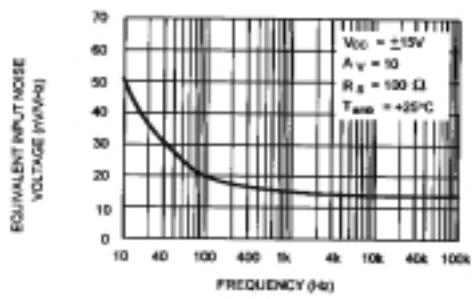

TOTAL HARMONIC DISTORTION VERSUS  
FREQUENCY

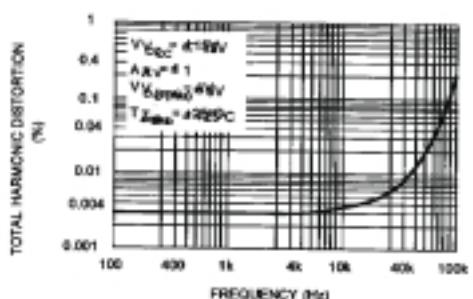

CONTEK

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

# TL074

# LINEAR INTEGRATED CIRCUIT

## PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower



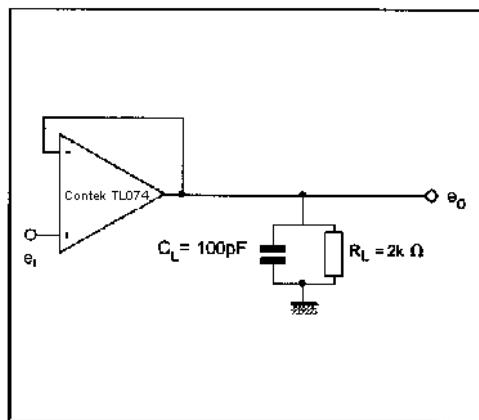


Figure 2 : Gain-of-10 Inverting Amplifier

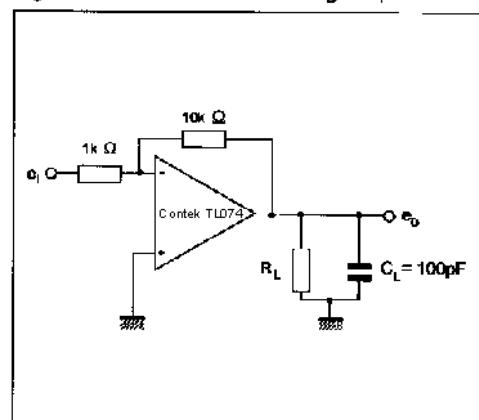

## TYPICAL APPLICATIONS

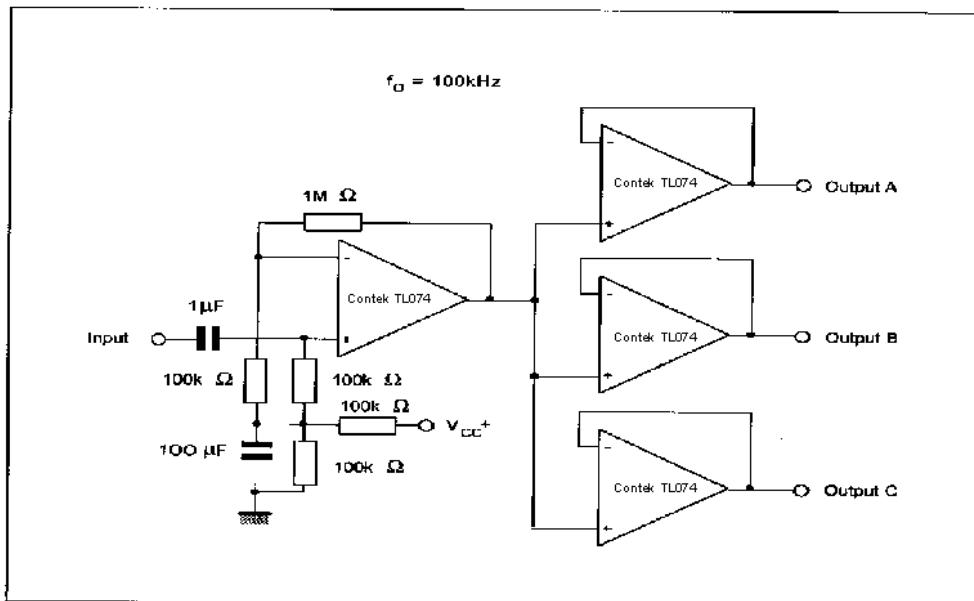

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com