

**GaAs MMIC SMT DOUBLE-BALANCED MIXER 4.5 - 9 GHz**

FEBRUARY 2001

## Features

- LOW COST PLASTIC CONVERTER
- FOR MICROWAVE RADIOS
- ULTRA SMALL PACKAGE: MSOP8
- CONVERSION LOSS: 8.5 dB
- LO/RF ISOLATION: 25 dB

## General Description

The HMC219MS8 is an ultra miniature double-balanced mixer in an 8 lead plastic surface mount package (MSOP). This passive MMIC mixer is constructed of GaAs Schottky diodes and novel planar transformer baluns on the chip. The device can be used as an up or downconverter, bi-phase (de) modulator or phase comparator. It is especially suited for 5.2 GHz UNII, 5.8 GHz ISM, or 5.9 to 8.5 GHz Microwave Radio applications because of its high dynamic input signal range, small size, zero DC bias requirement and low cost. The consistent MMIC performance will improve system operation and assure regulatory compliance. The MSOP8 package is the smallest footprint available for a complete passive double-balanced mixer, 0.118" x 0.190" (3.0mm x 4.9mm). At a height of 0.040" (1.0mm) this is the *thinnest* mixer package available today.



4

MIXERS

SMT




## Guaranteed Performance, As a Function of LO Drive, - 40 to + 85 deg. C

Parameter	LO = +13 dBm IF = 100 MHz			LO = +11 dBm IF = 100 MHz			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range, RF & LO	4.5 - 9.0			4.5 - 8.6			GHz
Frequency Range, IF	DC - 2.5			DC - 2.5			GHz
Conversion Loss		8.5	10		8.5	10	dB
Noise Figure (SSB)		8.5	10		8.5	10	dB
LO to RF Isolation	17	25		20	25		dB
LO to IF Isolation	17	25		20	25		dB
IP3 (Input)	15	21		15	21		dBm
1 dB Gain Compression (Input)	7	10		5	8		dBm
Local Oscillator Drive Level			17			17	dBm


## GaAs MMIC SMT DOUBLE-BALANCED MIXER 4.5 - 9 GHz

FEBRUARY 2001


**Conversion Loss vs. Temperature @ LO = +13 dBm**

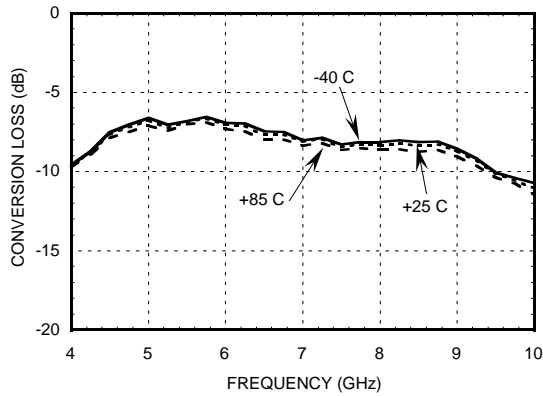


**Isolation @ LO = +13 dBm**

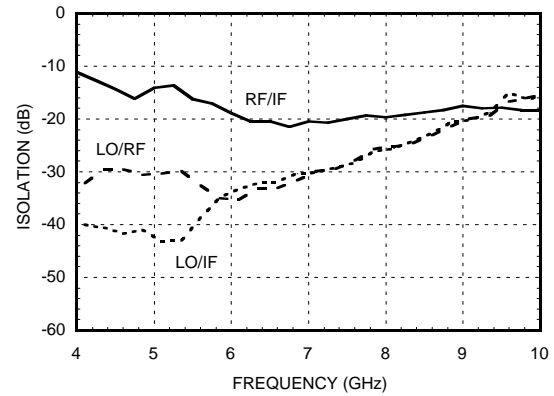


**Conversion Loss vs. Lo Drive**

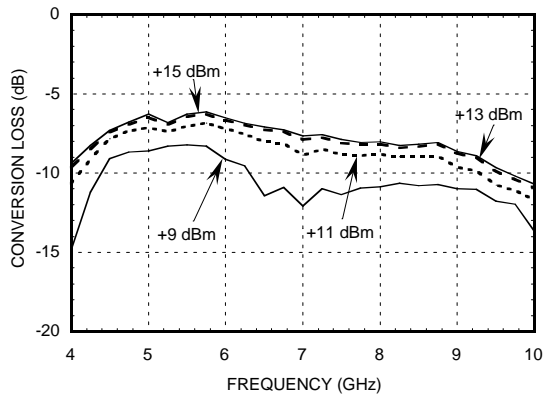


**Return Loss @ LO = +13 dBm**

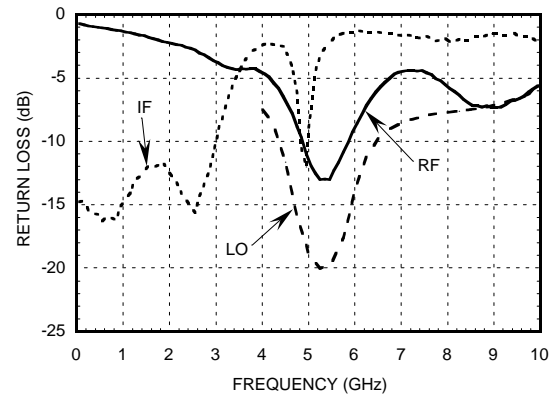

**IF Bandwidth @ LO = +13 dBm**

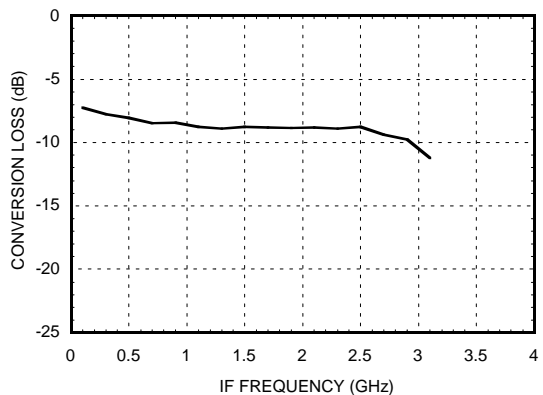


**P1dB vs. Temperature @ LO = +13 dBm**

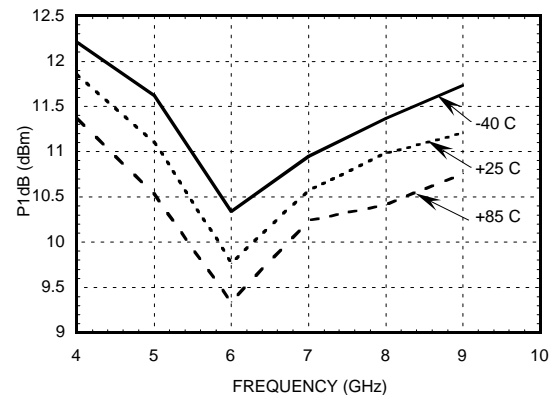

4

MIXERS


SMT




## GaAs MMIC SMT DOUBLE-BALANCED MIXER 4.5 - 9 GHz

FEBRUARY 2001


### Input IP3 vs. LO Drive

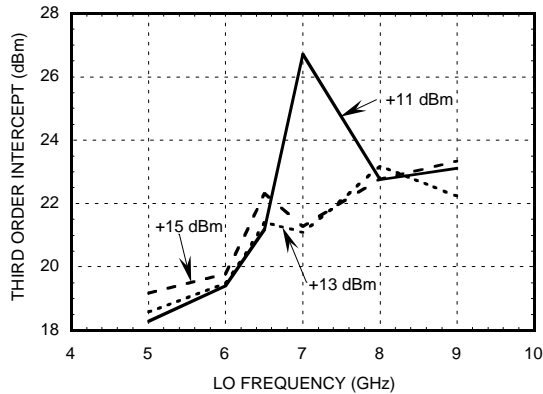


### Input IP3 vs. Temperature @ LO = +13 dBm

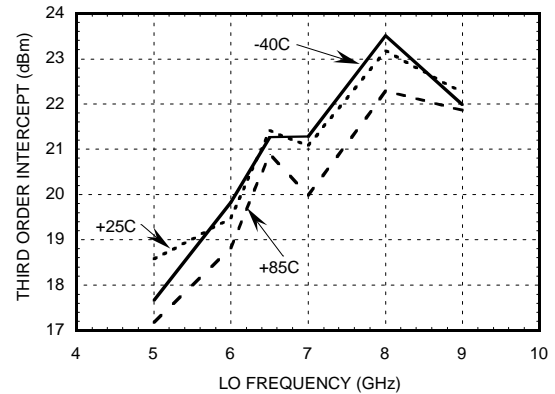

### Input IP2 vs. LO Drive

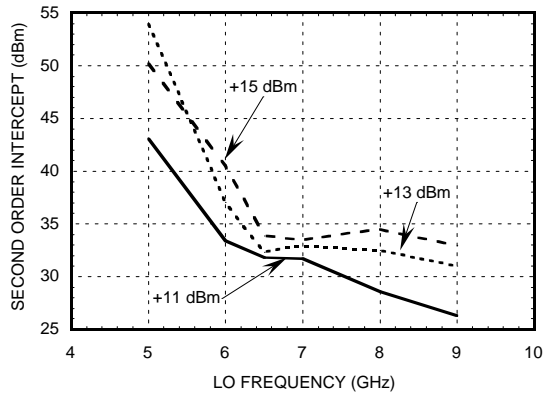

### Input IP2 vs. Temperature @ LO = +13 dBm

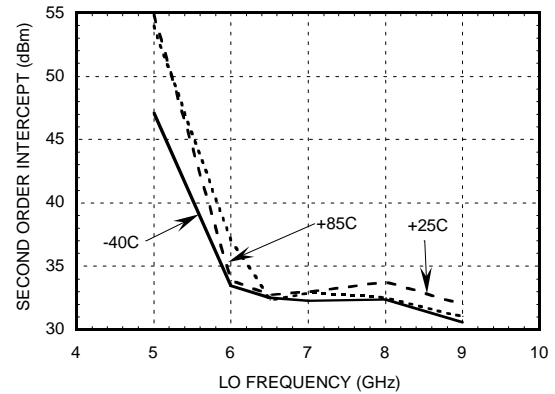

### MXN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	12.2	22.3	20.7	33.9
1	13.2	0	36.9	36.7	49.5
2	79.8	53.7	47.7	55.4	68.1
3	>105	>105	78.1	65.5	83.1
4	>105	>105	>105	98.1	87.1

RF = 6 @ -10dBm  
 LO = 6.1 @ 13dBm  
 All values in dBc below IF power level (-1Rf + 1LO).

### Harmonics of LO


LO Frequency (GHz)	nLO Spur at RF Port			
	1	2	3	4
4.0	33	29	39	54
5.0	31	23	34	47
6.0	35	21	40	55
7.0	31	26	53	xx
8.0	27	32	54	xx
9.0	21	43	xx	xx

LO = +13 dBm  
 All values in dBc below input LO level measured at the RF port

## GaAs MMIC SMT DOUBLE-BALANCED MIXER 4.5 - 9 GHz

FEBRUARY 2001


### Schematic

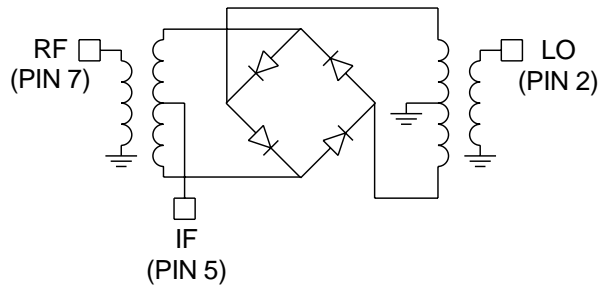

### Absolute Maximum Ratings

RF / IF Input	+13 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 deg C
Operating Temperature	-55 to +85 deg C

### Outline Drawing

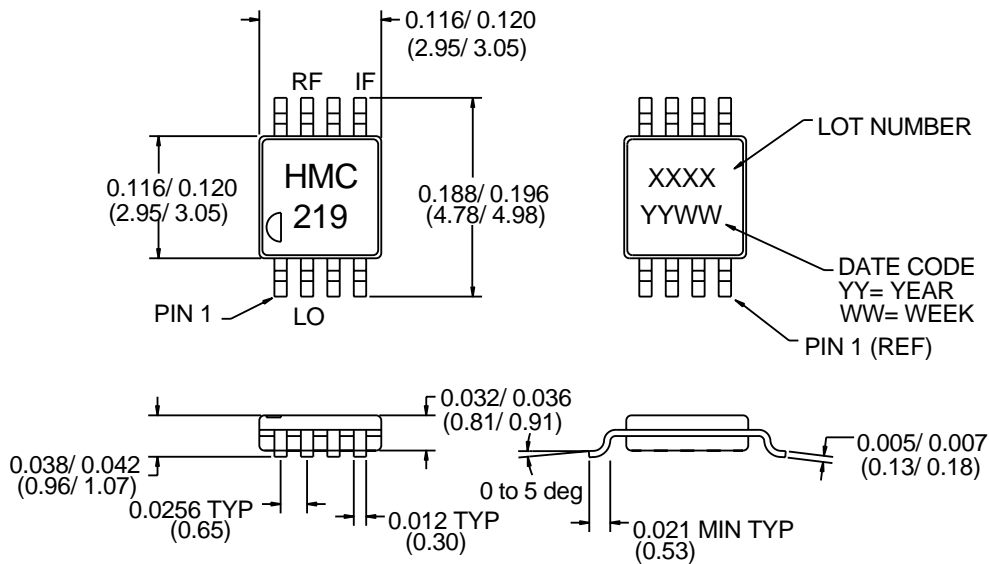

1. MATERIAL:
  - A) PACKAGE BODY - LOW STRESS INJECTION-MOLDED PLASTIC, SILICA & SILICONE IMPREGNATED.
  - B) LEADFRAME MATERIAL: COPPER ALLOY
2. PLATING: LEAD-TIN SOLDER PLATE
3. DIMENSIONS ARE IN INCHES (MILLIMETERS), UNLESS OTHERWISE SPECIFIED TOL. ARE  $\pm 0.005 (\pm 0.13)$
4. ALL UNLABELED LEADS ARE GROUND