


Band pass filters for the receiving RF circuits of transceiver.

- High stability and reliability with good performance and no adjustment.
- Wide and sharp pass band characteristics.
- Low insertion loss and deep stop band attenuation for interference.
- Terminating Impedance : $150\Omega//0\text{pF}$
- SMD Type Package : KF465AS(SC-45), KF465AV(SC-44)

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

ITEM	SYMBOL	RATING	UNIT
Input Signal Level	$I_{S_{\max}}$	0	dBm
DC Permissive Voltage	V_{DC}	+10	V
Operating Temperature Range	T_{opr}	-20~+60	°C
Storage Temperature Range	T_{stg}	-30~+85	°C

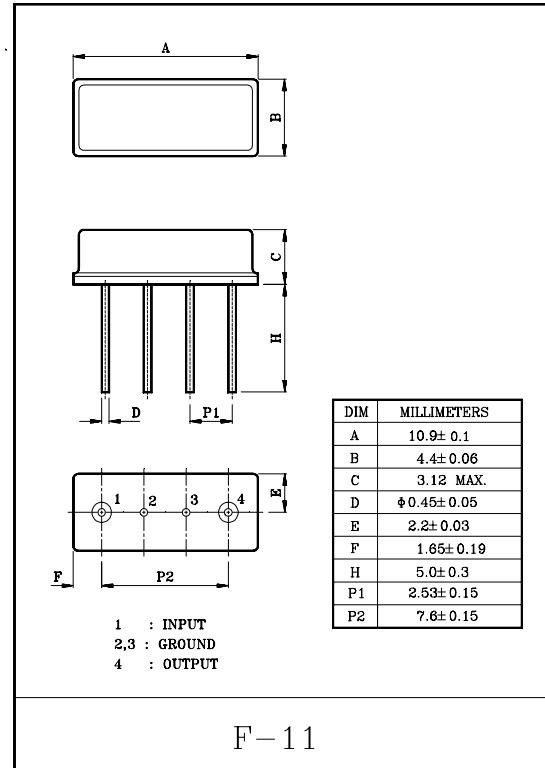


ELECTRICAL CHARACTERISTICS (Temperature $20 \pm 2^\circ\text{C}$, Humidity $65 \pm 5\%$)

ITEMS	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Nominal Center Frequency	f_o	-	-	465	-	MHz
Bandwidth	$BW_{3\text{dB}}$	-	$f_o \pm 3.0$	-	-	MHz
Insertion Loss	IL_{PASS}	$f_o \pm 3.0\text{MHz}$	-	-	4.0	dB
Ripple Level	A_{RIP}	$f_o \pm 3.0\text{MHz}$	-	-	2.0	dB
Rejection Level	IL_{STOP}	$f_o - 13.7 \sim f_o - 7.7\text{MHz}$	8	-	-	dB
		$f_o - 45.8 \sim f_o - 39.8\text{MHz}$	50	-	-	dB
		$f_o + 39.8 \sim f_o + 45.8\text{MHz}$	45	-	-	dB
Input/Output Impedance	$Z_i(Z_o)$	-	-	$150\Omega//0\text{pF}$	-	-

KF465A

TEST CIRCUIT

REFERENCE LEVEL TEST CIRCUIT

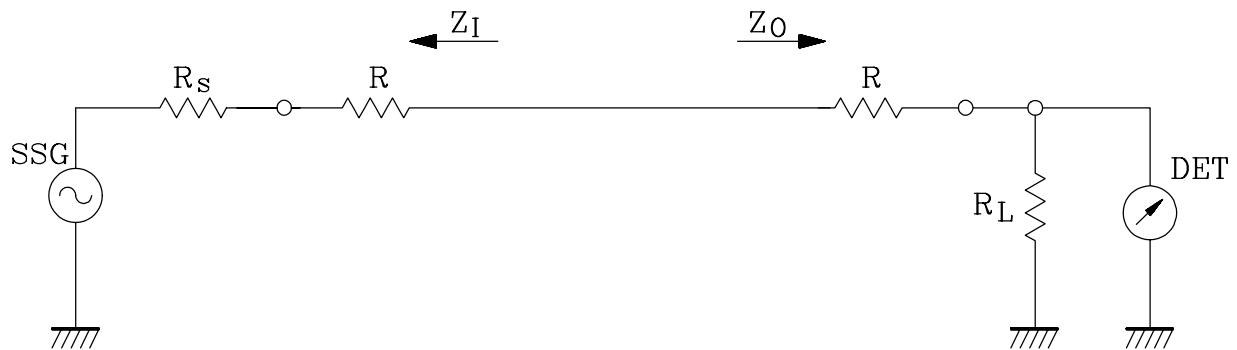


$R_S, R_L : 50\Omega$ (Internal Impedance of Source and Load)

$R : 0\Omega$

$$Z_I(Z_O) = R_S(R_L) + R$$

MEASUREMENT CIRCUIT

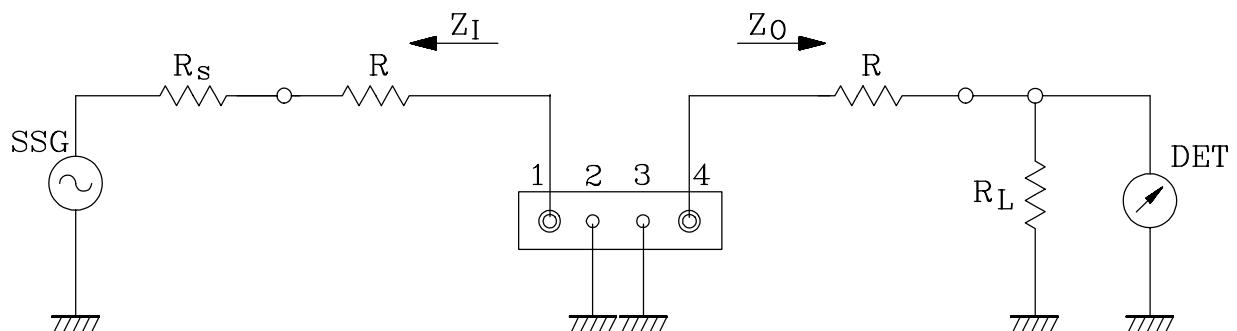

1: Input

2,3: Ground

4: Output

$R_S, R_L : 50\Omega$ (Internal Impedance of Source and Load)

$R : 100\Omega$

$$Z_I(Z_O) = R_S(R_L) + R$$