


1 - Cathode  
2 - Anode  
Case Isolated



**ADVANCED  
POWER  
TECHNOLOGY®**  
APT30D20H 200V 30A

## ULTRAFAST SOFT RECOVERY RECTIFIER DIODE

### PRODUCT APPLICATIONS

- Anti-Parallel Diode
  - Switchmode Power Supply
  - Inverters
- Free Wheeling Diode
  - Motor Controllers
  - Converters
- Snubber Diode
- Uninterruptible Power Supply (UPS)
- Induction Heating
- High Speed Rectifiers

### PRODUCT FEATURES

- Ultrafast Recovery Times
- Soft Recovery Characteristics
- Hermetic TO-258 Package
- Low Forward Voltage
- High Blocking Voltage
- Low Leakage Current

### PRODUCT BENEFITS

- Low Losses
- Low Noise Switching
- Cooler Operation
- Higher Reliability Systems
- Increased System Power Density

### MAXIMUM RATINGS

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT30D20H	UNIT
$V_R$	Maximum D.C. Reverse Voltage	200	Volts
$V_{RRM}$	Maximum Peak Repetitive Reverse Voltage		
$V_{RWM}$	Maximum Working Peak Reverse Voltage		
$I_F(AV)$	Maximum Average Forward Current ( $T_C = 80^\circ\text{C}$ , Duty Cycle = 0.5)	30	Amps
$I_F(RMS)$	RMS Forward Current	40	
$I_{FSM}$	Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3ms)	200	
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_L$	Lead Temperature: 0.063" from Case for 10 Sec.	300	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$V_F$	Maximum Forward Voltage			1.4	Volts
				$I_F = 30\text{A}$	
				$I_F = 60\text{A}$	
$I_{RM}$	Maximum Reverse Leakage Current			250	$\mu\text{A}$
				$V_R = V_R$ Rated	
				$V_R = V_R$ Rated, $T_J = 125^\circ\text{C}$	
$C_T$	Junction Capacitance, $V_R = 150\text{V}$		110		pF
$L_S$	Series Inductance (Lead to Lead 5mm from Base)		10		nH

APT Website - <http://www.advancedpower.com>

USA 405 S.W. Columbia Street  
EUROPE Chemin de Magret

Bend, Oregon 97702-1035  
F-33700 Merignac - France

Phone: (541) 382-8028  
Phone: (33) 5 57 92 15 15

FAX: (541) 388-0364  
FAX: (33) 5 56 47 97 61

## DYNAMIC CHARACTERISTICS

APT60D20H


Symbol	Characteristic	MIN	TYP	MAX	UNIT
$t_{rr1}$	Reverse Recovery Time, $I_F = 1.0A$ , $di_F/dt = -15A/\mu s$ , $V_R = 30V$ , $T_J = 25^\circ C$		35	50	ns
$t_{rr2}$	Reverse Recovery Time	$T_J = 25^\circ C$	40		
$t_{rr3}$	$I_F = 30A$ , $di_F/dt = -240A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	60		
$t_{fr1}$	Forward Recovery Time	$T_J = 25^\circ C$	155		
$t_{fr2}$	$I_F = 30A$ , $di_F/dt = -240A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	155		
$I_{RRM1}$	Reverse Recovery Current	$T_J = 25^\circ C$	6	8	Amps
$I_{RRM2}$	$I_F = 30A$ , $di_F/dt = -240A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	10	13	
$Q_{rr1}$	Recovery Charge	$T_J = 25^\circ C$	120		nC
$Q_{rr2}$	$I_F = 30A$ , $di_F/dt = -240A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	300		
$V_{fr1}$	Forward Recovery Voltage	$T_J = 25^\circ C$	2.5		Volts
$V_{fr2}$	$I_F = 30A$ , $di_F/dt = -240A/\mu s$ , $V_R = 100V$	$T_J = 100^\circ C$	2.5		
$diM/dt$	Rate of Fall of Recovery Current	$T_J = 25^\circ C$	300		A/ $\mu s$
		$T_J = 100^\circ C$	600		

## THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			1.50	$^\circ C/W$
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance			40	
$W_T$	Package Weight		0.22		oz
			6.1		gm

APT Reserves the right to change, without notice, the specifications and information contained herein.

### TO-258 Package Outline

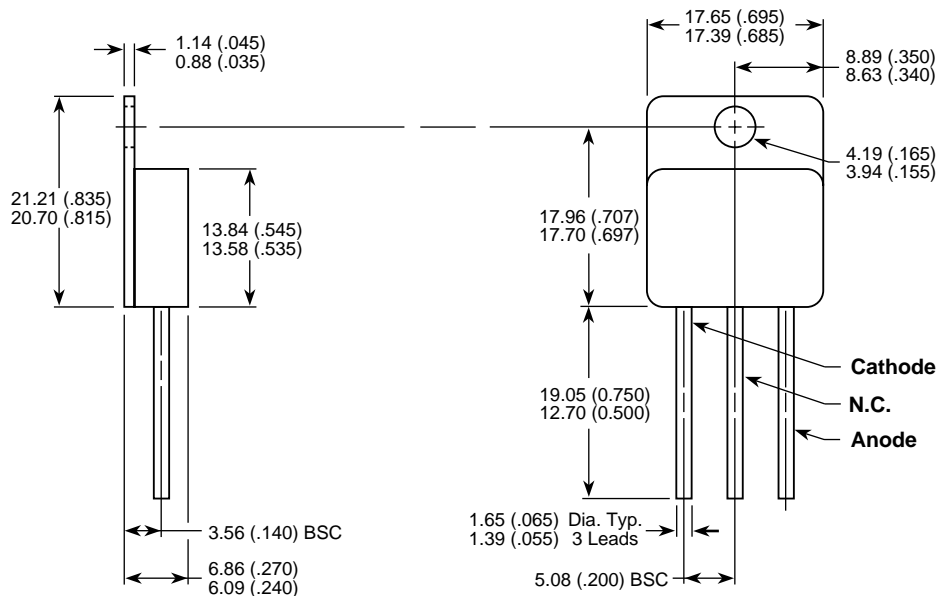

Dimensions in Millimeters and (Inches)

APT's devices are covered by one or more of the following U.S. patents: 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336  
5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058