

# M5228P/FP

## QUAD LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)

### DESCRIPTION

The M5228 is a semiconductor integrated circuit designed for a low-noise preamplifier in audio equipment and a general-purpose operational amplifier in other electronic equipment. Four low-noise operational amplifier circuits displaying internal phase-compensated high gain and low distortion are contained in a 14-pin standard DIP and 14-pin mini flat (FP) package for application over a wide range as a general-purpose dual amplifier in general electronic equipment.

The device has virtually the same characteristics as the 4557, 4558, 4559 and 741 operational amplifiers. The unit can also be used as a single power supply type and amplifier in portable equipment. It is also suitable as a headphone amplifier because of its high load current.

### FEATURES

- High gain, low distortion  
 $G_{VO} = 110\text{dB}$ ,  $\text{THD} = 0.0015\%$  (typ.)
- High slew rate, high  $f_T$  .....  $\text{SR} = 2.2\text{V}/\mu\text{s}$ ,  $f_T = 7\text{MHz}$  (typ.)
- Low noise ( $R_G = 1\text{k}\Omega$ ) FLAT .....  $V_{NI} = 2\mu\text{Vrms}$  (typ.)  
 RIAA .....  $V_{NI} = 1\mu\text{Vrms}$  (typ.)
- Operation with low supply voltage .....  $V_{CC} \geq 4\text{V} (\pm 2\text{V})$
- High load current, high power dissipation  
 $I_{LP} = \pm 50\text{mA}$ ,  $P_d = 700\text{mW}$  (M5228P)  
 $P_d = 550\text{mW}$  (M5228FP)


### APPLICATION

General-purpose amplifier in stereo equipment, tape decks and radio stereo cassette recorders; active filters, servo amplifiers, operational circuits in other general electronic equipment.

### RECOMMENDED OPERATING CONDITION


- Supply voltage range .....  $\pm 2 \sim \pm 16\text{V}$
- Rated supply voltage .....  $\pm 15\text{V}$

### PIN CONFIGURATION (TOP VIEW)

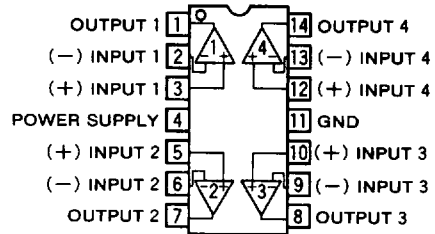

Outline 14P4 (P)  
14P2S-A (FP)

### BLOCK DIAGRAM

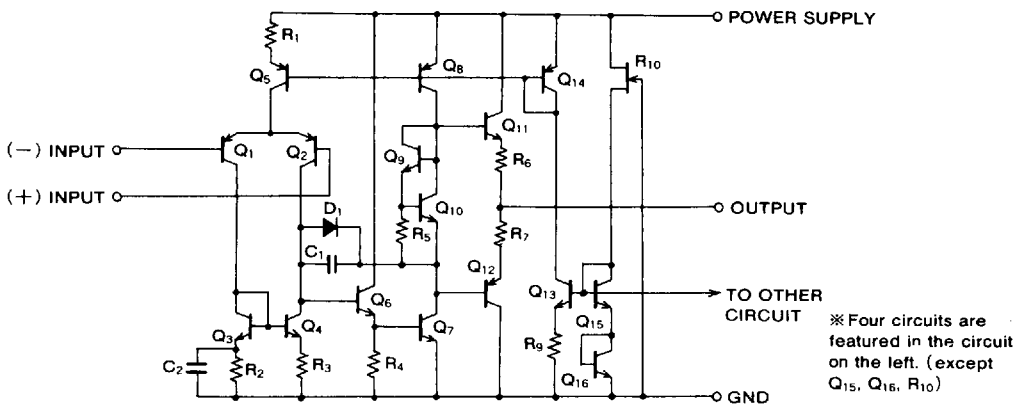

**QUAD LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**

**ABSOLUTE MAXIMUM RATINGS** ( $T_a=25^\circ\text{C}$ , unless otherwise noted)


| Symbol     | Parameter                  | Conditions                  | Ratings          | Unit                 |
|------------|----------------------------|-----------------------------|------------------|----------------------|
| $V_{CC}$   | Supply voltage             |                             | $\pm 18$         | V                    |
| $I_{LP}$   | Load current               |                             | $\pm 50$         | mA                   |
| $V_{id}$   | Differential input voltage |                             | $\pm 30$         | V                    |
| $V_{ic}$   | Common input voltage       |                             | $\pm 15$         | V                    |
| $P_d$      | Power dissipation          |                             | 700(DIP)/550(FP) | mW                   |
| $K_\theta$ | Thermal derating           | $T_a \geq 25^\circ\text{C}$ | 7(DIP)/5.5(FP)   | mW/ $^\circ\text{C}$ |
| $T_{opr}$  | Ambient temperature        |                             | $-20 \sim +75$   | $^\circ\text{C}$     |
| $T_{stg}$  | Storage temperature        |                             | $-55 \sim +125$  | $^\circ\text{C}$     |

**ELECTRICAL CHARACTERISTICS** ( $T_a=25^\circ\text{C}$ ,  $V_{CC}=\pm 15\text{V}$ )


| Symbol   | Parameter                      | Test conditions                                     | Limits   |          |      | Unit                   |
|----------|--------------------------------|-----------------------------------------------------|----------|----------|------|------------------------|
|          |                                |                                                     | Min.     | Typ.     | Max. |                        |
| $I_{CC}$ | Circuit current                | $V_{in}=0$                                          |          | 6.0      | 12.0 | mA                     |
| $V_{IO}$ | Input offset voltage           | $R_s \leq 10\text{k}\Omega$                         |          | 0.5      | 6.0  | mV                     |
| $I_{IO}$ | Input offset current           |                                                     |          | 5        | 200  | nA                     |
| $I_{IB}$ | Input bias current             |                                                     |          |          | 500  | nA                     |
| $R_{in}$ | Input resistance               |                                                     | 0.3      | 5        |      | M $\Omega$             |
| $G_{VO}$ | Open loop voltage gain         | $R_L \geq 2\text{k}\Omega$ , $V_o = \pm 10\text{V}$ | 86       | 110      |      | dB                     |
| $V_{OM}$ | Maximum output voltage         | $R_L \geq 10\text{k}\Omega$                         | $\pm 12$ | $\pm 14$ |      | V                      |
|          |                                | $R_L \geq 2\text{k}\Omega$                          | $\pm 10$ | $\pm 13$ |      | V                      |
| $V_{CM}$ | Common input voltage range     |                                                     | $\pm 12$ | $\pm 14$ |      | V                      |
| CMRR     | Common mode rejection ratio    | $R_s \leq 10\text{k}\Omega$                         | 70       | 90       |      | dB                     |
| SVRR     | Supply voltage rejection ratio | $R_s \leq 10\text{k}\Omega$                         |          | 30       | 150  | $\mu\text{V}/\text{V}$ |
| $P_d$    | Power dissipation              |                                                     |          | 180      | 360  | mW                     |
| SR       | Slew rate                      | $G_v=0\text{dB}$ , $R_L=2\text{k}\Omega$            |          | 2.2      |      | V/ $\mu\text{s}$       |
| $f_T$    | Gain bandwidth product         |                                                     |          | 7        |      | MHz                    |
| $V_{NI}$ | Input referred noise voltage   | $R_s=1\text{k}\Omega$ , BW:10Hz~30kHz               |          | 2.0      |      | $\mu\text{Vrms}$       |

**TYPICAL CHARACTERISTICS**

**THERMAL DERATING (MAXIMUM RATING)**

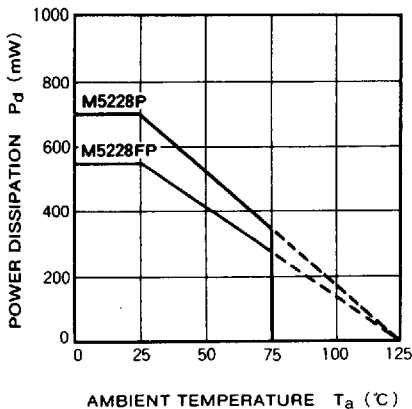

**VOLTAGE GAIN VS. FREQUENCY RESPONSE**

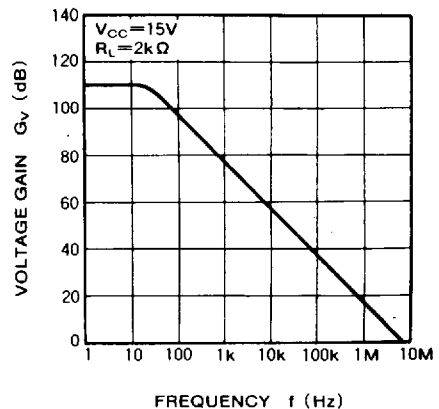


6249826 0021553 265




**QUAD LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)**


**CIRCUIT CURRENT VS. SUPPLY VOLTAGE**

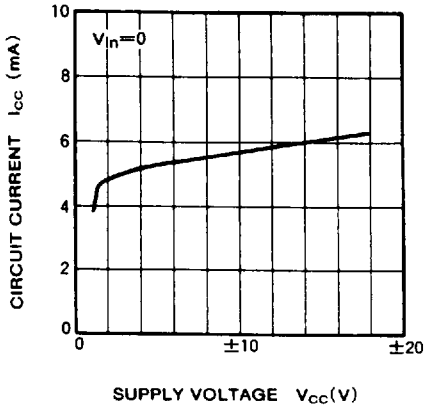


**CIRCUIT CURRENT VS. AMBIENT TEMPERATURE**

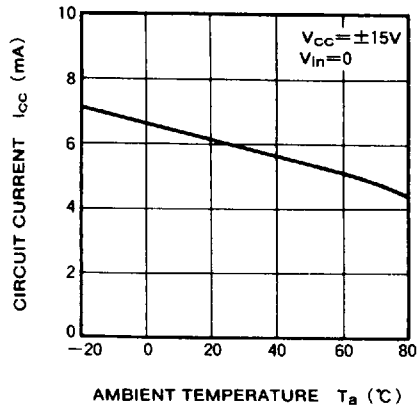


**INPUT OFFSET VOLTAGE VS. AMBIENT TEMPERATURE**

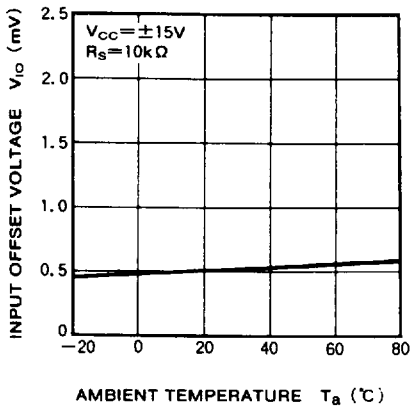

**OUTPUT VOLTAGE / LOAD CURRENT PEAK VS. LOAD RESISTANCE**

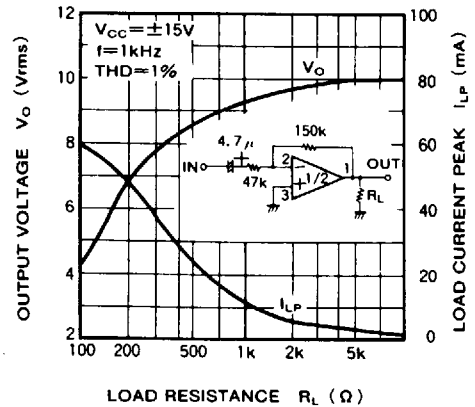

**MAXIMUM OUTPUT VOLTAGE VS. SUPPLY VOLTAGE**

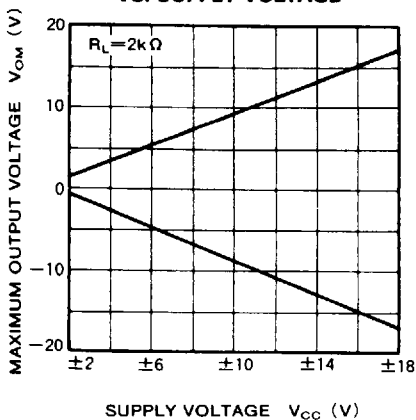

**MAXIMUM OUTPUT VOLTAGE VS. FREQUENCY RESPONSE**

