
Quad 2-Input Multiplexer (Non-Inverting)

The MC10158 is a quad two channel multiplexer. A common select input determines which data inputs are enabled. A high (H) level enables data inputs D00, D10, D20, and D30 and a low (L) level enables data inputs D01, D11, D21, and D31.


 $\begin{array}{rll} P_D = & 197 \text{ mW typ/pkg (No Load)} \\ t_{pd} = & 2.5 \text{ ns typ (Data to Q)} \\ & & 3.2 \text{ ns typ (Select to Q)} \\ t_r, t_f = & 2.5 \text{ ns typ (20\%-80\%)} \end{array}$

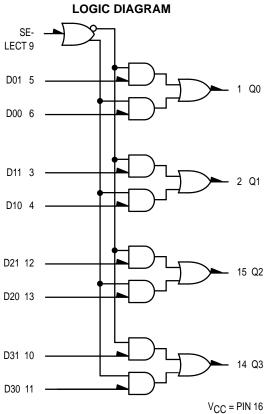

 $V_{\text{EE}} = \text{PIN 16}$

TRUTH TABLE

Select	D0	D1	Q
L	Х	L	L
L	Х	Н	Н
Н	L	Х	L
Н	Н	Х	Н



DIP **PIN ASSIGNMENT** Q0 16 VCC 1 Q1 2 15 Q2 Q3 D11 3 14 D10 4 13 D20 D21 D01 5 12 D00 6 11 D30 NC D31 7 10 SELECT VEE 8 9

Pin assignment is for Dual–in–Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–36 of the Motorola MECL Data Book (DL122/D).

3/93

ELECTRICAL CHARACTERISTICS

		Test Limits								
	Symbol	Pin Under Test	−30°C		+25°C			+85°C		1
Characteristic			Min	Max	Min	Тур	Max	Min	Max	Unit
Power Supply Drain Current	ΙE	8		53		38	48		53	mAdc
Input Current	l _{inH}	9 5		360 400			225 250		225 250	μAdc
	l _{inL}	5	0.5		0.5			0.3		μAdc
Output Voltage Logic 1	VOH	1	-1.060	-0.890	-0.960		-0.810	-0.890	-0.700	Vdc
Output Voltage Logic 0	VOL	1	-1.890	-1.675	-1.850		-1.650	-1.825	-1.615	Vdc
Threshold Voltage Logic 1	VOHA	1	-1.080		-0.980			-0.910		Vdc
Threshold Voltage Logic 0	VOLA	1		-1.655			-1.630		-1.595	Vdc
Switching Times (50 Ω Load)										ns
Propagation Data Input Delay Select Input	t5–1– t9+1+	1 1	1.3 2.5	3.1 4.8	1.2 2.4	2.5 3.2	3.0 4.5	1.3 2.5	3.2 4.8	
Rise Time (20 to 80%)	t ₁₊	1	1.6	3.4	1.5	2.5	3.3	1.6	3.4	
Fall Time (20 to 80%)	t ₁₋	1	1.6	3.4	1.5	2.5	3.3	1.6	3.4	


ELECTRICAL CHARACTERISTICS (continued)

				TEST VOLTAGE VALUES (Volts)					
		@ Test Te	mperature	V _{IHmax}	VILmin	VIHAmin	VILAmax	VEE	
			–30°C	-0.890	-1.890	-1.205	-1.500	-5.2	
			+25°C	-0.810	-1.850	-1.105	-1.475	-5.2	
			+85°C	-0.700	-1.825	-1.035	-1.440	-5.2	
			Pin	TEST VOLTAGE APPLIED TO PINS LISTED BELOW				BELOW	
Characteristic		Symbol	Under Test	VIHmax	V _{ILmin}	VIHAmin	V _{ILAmax}	VEE	(VCC) Gnd
Power Supply Drain Cu	rrent	١E	8					8	16
Input Current		l _{in} H	9 5	9 5				8 8	16 16
		l _{inL}	5		5			8	16
Output Voltage	Logic 1	VOH	1	5				8	16
Output Voltage	Logic 0	VOL	1					8	16
Threshold Voltage	Logic 1	VOHA	1			5		8	16
Threshold Voltage	Logic 0	VOLA	1				5	8	16
Switching Times	(50 Ω Load)			+1.11V	+0.31V	Pulse In	Pulse Out	–3.2 V	+2.0 V
Propagation Delay	Data Input Select Input	t5–1– t9+1+	1 1	6		5 9	1 1	8 8	16 16
Rise Time	(20 to 80%)	t ₁₊	1			5	1	8	16
Fall Time	(20 to 80%)	t ₁₋	1			5	1	8	16


Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

MC10158

OUTLINE DIMENSIONS

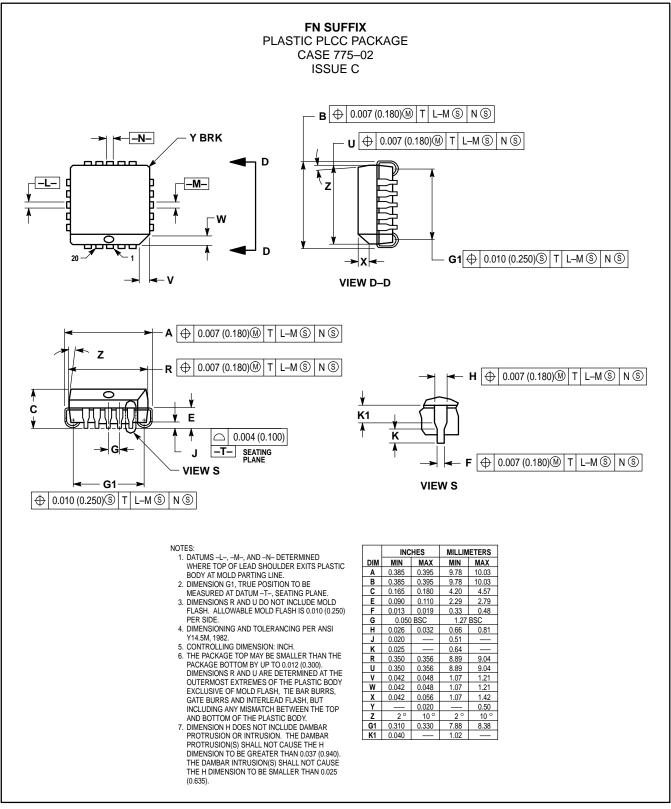

OUTLINE DIMENSIONS

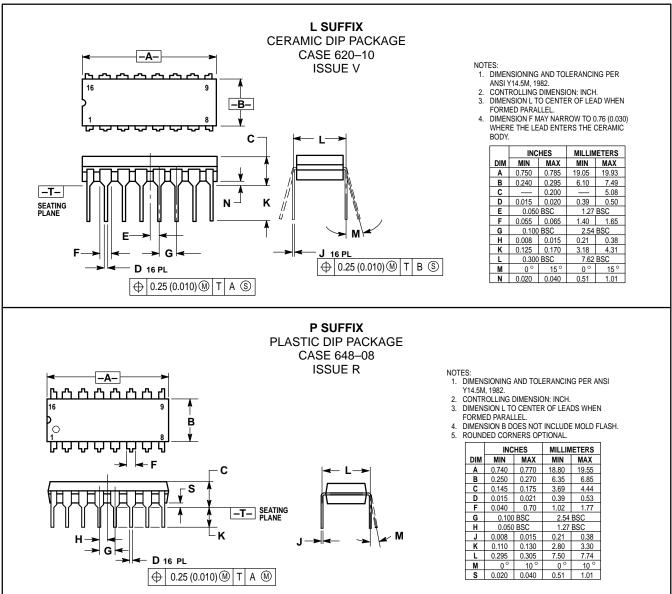

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and () are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

 \Diamond

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298



