3-INPUT 1-OUTPUT AUDIO SWITCH


GENERAL DESCRIPTION

The NJM2521 is 58kΩ input impedance 3-input 1-output audio switch.

It contains two bias-type inputs and one buffer-type output.

- **FEATURES**
- Operating Voltage .
- Crosstalk •
- Input Impedance .
- $+4.75V \sim +13V$ (-70dB typ.) (58k Ω typ.)
- . 3-Input, 1-Output
- **Bipolar Technology**
- Package Outline
- DIP8, DMP8, SIP8, SSOP8

PIN CONFIGURATION

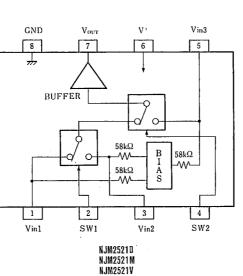






NJM2521V



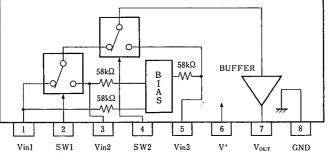



5

PACKAGE OUTLINE



NJM2521D

NJM2521M



PIN FUNCTION 1. Vin1 2. SW1 3. Vin2 4. SW2 4. 3 w 2
5. Vin3
6. V⁺.
7. Vout 8. GND

-New Japan Radio Co.,Ltd.-

(Ta=25℃)

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|--------------|--------|
| Supply Voltage | V ⁺ | +15 | v |
| Power Dissipation | | (DIP-8) 500 | |
| | PD | (DMP-8) 300 | mW |
| | | (SIP-8) 800 | 111 44 |
| | | (SSOP-8) 250 | |
| Operating Temperature Range | Topr | -20~+75 | C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |

ELECTRICAL CHARACTERISTICS


| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|---------------------------|-----------------|---------------------------|-------|------|-------|------|
| Operating Voltage | V* | | +4.75 | - | +13.0 | v |
| Operating Current | Icc | | - | 11.0 | 14.5 | mA |
| Frequency Characteristics | Gr | Vin=2Vpp, Vo=10MHz/100kHz | -1.0 | . 0 | +1.0 | dB |
| Voltage Gain | Gv | Vin=2Vpp, 100kHz | -0.5 | 0 | +0.5 | dB |
| Total Harmonic Distortion | THD | Vin=2.5Vpp, 1kHz | - | 0.03 | - 1 | % |
| Output Offset Voltage | Voff | | - 35 | 0 | +35 | mV |
| Switching Voltage | V _{CH} | | 2.4 | _ | - | v |
| | V _{CL} | | - | - | 0.8 | v |
| Input Impedance | Ri | | _ | 58 | - | kΩ |
| Output Impedance | Ro | | - | 10 | - | Ω |

INPUT CONTROL SIGNAL-OUTPUT SIGNAL


| SW1 | SW2 | OUTPUT SIGNAL | |
|-----|-----|-------------------|--|
| L | L | V _{IN} 1 | |
| н | L | V _{IN} 2 | |
| L/H | Н | V _{IN} 3 | |

APPLICATION

Oscillation Pervention on light loading conditions Recommended under circuit

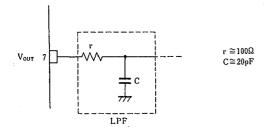

TEST CIRCUIT

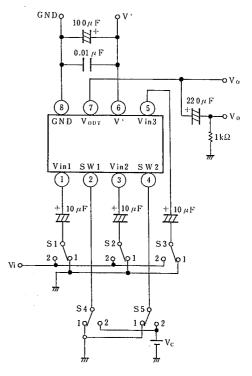

$(V^+=5V, Ta=25^{\circ}C)$

-New Japan Radio Co., Ltd.—

5-121

MEMO

[CAUTION] The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.