


MJ10023

Designer's™ Data Sheet


SWITCHMODE Series NPN Silicon Power Darlington Transistor with Base-Emitter Speedup Diode

The MJ10023 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
 - 150 ns Inductive Fall Time @ 25°C (Typ)
 - 300 ns Inductive Storage Time @ 25°C (Typ)
- Operating Temperature Range – 65 to + 200°C
- 100°C Performance Specified for:
 - Reversed Biased SOA with Inductive Loads
 - Switching Times with Inductive Loads
 - Saturation Voltages
 - Leakage Currents



40 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTOR
400 VOLTS
250 WATTS



CASE 197A-05
TO-204AE (TO-3)

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V_{CEO}	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	Vdc
Emitter Base Voltage	V_{EB}	80	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	40 80	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	20 40	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ @ $T_C = 100^\circ\text{C}$ Derate above 25°C	P_D	250 143 1.43	Watts W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	$^\circ\text{C/W}$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	$^\circ\text{C}$

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle $\leq 10\%$.

Designer's and SWITCHMODE are trademarks of Motorola, Inc.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) ($I_C = 100 \text{ mA}$, $I_B = 0$)	$V_{CEO(\text{sus})}$	400	—	—	Vdc	
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(\text{off})} = 1.5 \text{ Vdc}$) (V_{CEV} = Rated Value, $V_{BE(\text{off})} = 1.5 \text{ Vdc}$, $T_C = 150^\circ\text{C}$)	I_{CEV}	— —	— —	0.25 5.0	mAdc	
Collector Cutoff Current (V_{CE} = Rated V_{CEV} , $R_{BE} = 50 \Omega$, $T_C = 100^\circ\text{C}$)	I_{CER}	—	—	5.0	mAdc	
Emitter Cutoff Current ($V_{EB} = 2.0 \text{ V}$, $I_C = 0$)	I_{EBO}	—	—	175	mAdc	
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$		See Figure 13			
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 14			
ON CHARACTERISTICS (1)						
DC Current Gain ($I_C = 10 \text{ Adc}$, $V_{CE} = 5.0 \text{ V}$)	h_{FE}	50	—	600	—	
Collector-Emitter Saturation Voltage ($I_C = 20 \text{ Adc}$, $I_B = 1.0 \text{ Adc}$) ($I_C = 40 \text{ Adc}$, $I_B = 5.0 \text{ Adc}$) ($I_C = 20 \text{ Adc}$, $I_B = 10 \text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{CE(\text{sat})}$	— — —	— — —	2.2 5.0 2.5	Vdc	
Base-Emitter Saturation Voltage ($I_C = 20 \text{ Adc}$, $I_B = 1.2 \text{ Adc}$) ($I_C = 20 \text{ Adc}$, $I_B = 1.2 \text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{BE(\text{sat})}$	— —	— —	2.5 2.5	Vdc	
Diode Forward Voltage ($I_F = 20 \text{ Adc}$)	V_f	—	2.5	5.0	Vdc	
DYNAMIC CHARACTERISTICS						
Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f_{\text{test}} = 1.0 \text{ kHz}$)	C_{ob}	150	—	600	pF	
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	($V_{CC} = 250 \text{ Vdc}$, $I_C = 20 \text{ A}$, $I_{B1} = 1.0 \text{ Adc}$, $V_{BE(\text{off})} = 5.0 \text{ V}$, $t_p = 50 \mu\text{s}$, Duty Cycle $\leq 2.0\%$)	t_d	—	0.03	0.2	μs
Rise Time		t_r	—	0.4	1.2	μs
Storage Time		t_s	—	0.9	2.5	μs
Fall Time		t_f	—	0.3	0.9	μs
Inductive Load, Clamped (Table 1)						
Storage Time	($I_{CM} = 20 \text{ A}$, $V_{CEM} = 250 \text{ V}$, $I_{B1} = 1.0 \text{ A}$, $V_{BE(\text{off})} = 5 \text{ V}$, $T_C = 100^\circ\text{C}$)	t_{sv}	—	1.9	4.4	μs
Crossover Time		t_c	—	0.6	2.0	μs
Fall Time		t_{fi}	—	0.3	—	μs
Storage Time	($I_{CM} = 20 \text{ A}$, $V_{CEM} = 250 \text{ V}$, $I_{B1} = 1.0 \text{ A}$, $V_{BE(\text{off})} = 5 \text{ V}$, $T_C = 25^\circ\text{C}$)	t_{sv}	—	1.0	—	μs
Crossover Time		t_c	—	0.3	—	μs
Fall Time		t_{fi}	—	0.15	—	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle $\leq 2\%$.

TYPICAL ELECTRICAL CHARACTERISTICS

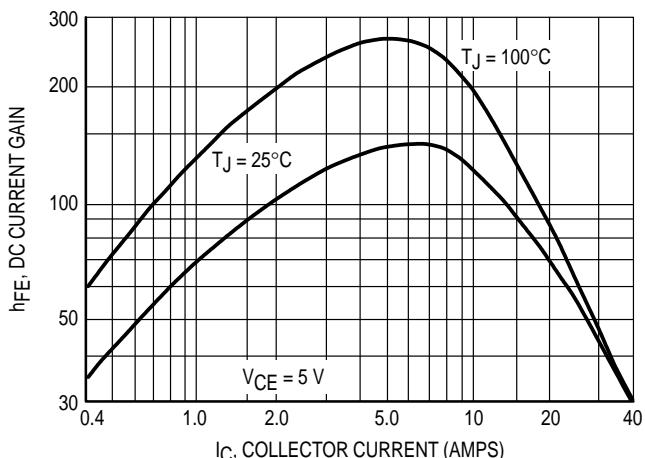


Figure 1. DC Current Gain

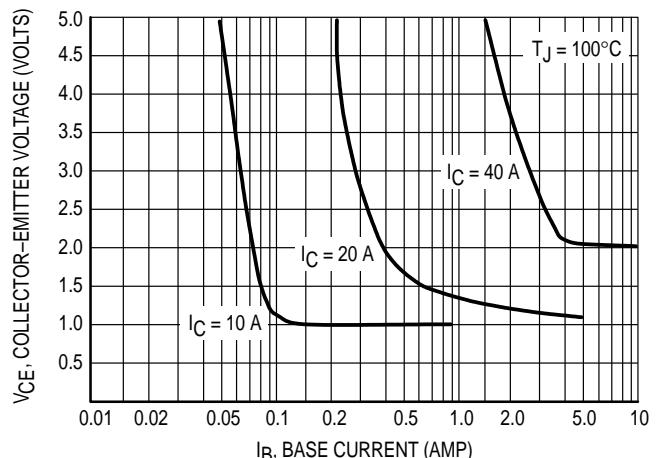


Figure 2. Collector Saturation Region

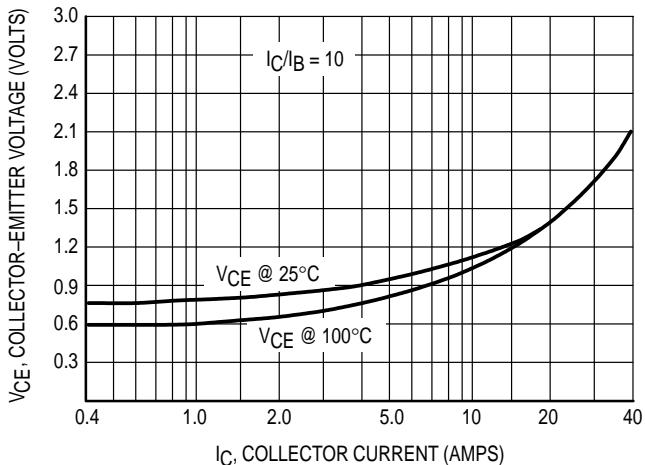


Figure 3. Collector-Emitter Saturation Voltage

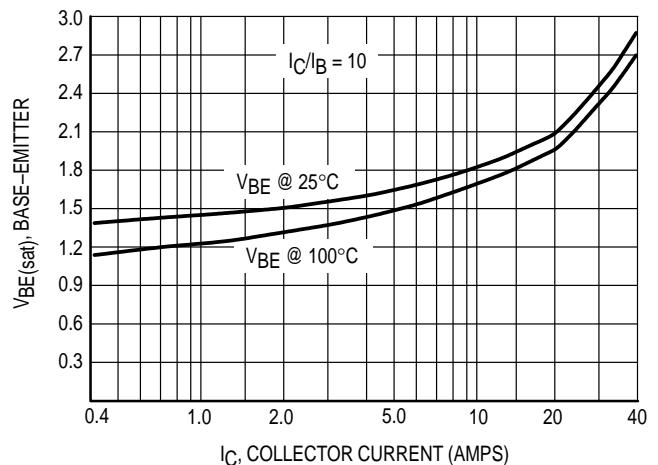


Figure 4. Base-Emitter Saturation Voltage

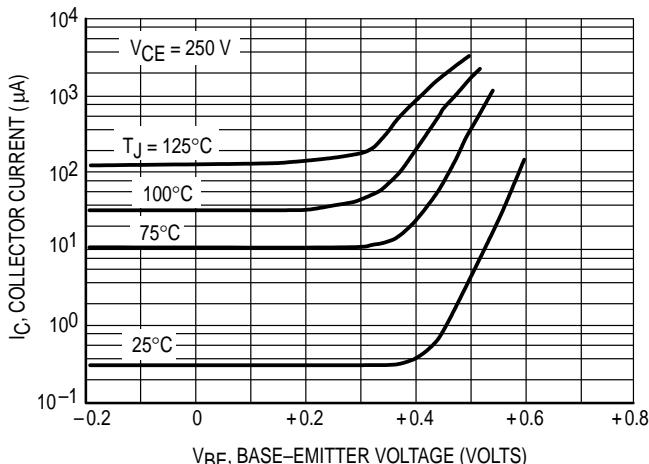


Figure 5. Collector Cutoff Region

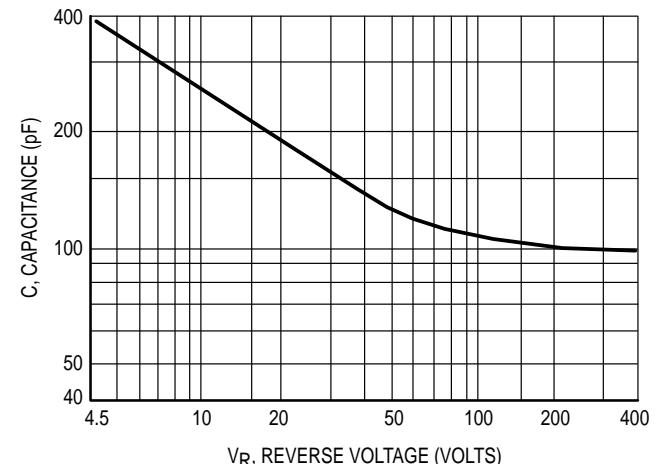


Figure 6. Cob, Output Capacitance

Table 1. Test Conditions for Dynamic Performance

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	<p>PW Varied to Attain $I_C = 100 \text{ mA}$</p>	INDUCTIVE TEST CIRCUIT 	TURN-ON TIME <p>I_{B1} adjusted to obtain the forced h_{FE} desired</p> TURN-OFF TIME <p>Use inductive switching driver as the input to the resistive test circuit.</p>
CIRCUIT VALUES	$L_{coil} = 10 \text{ mH}$, $V_{CC} = 10 \text{ V}$ $R_{coil} = 0.7 \Omega$ $V_{clamp} = V_{CEO(sus)}$	$L_{coil} = 180 \mu\text{H}$ $R_{coil} = 0.05 \Omega$ $V_{CC} = 20 \text{ V}$	$V_{CC} = 250 \text{ V}$ $R_L = 12.5 \Omega$ Pulse Width = 25 μs
TEST CIRCUITS		$t_1 \approx \frac{L_{coil} (I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil} (I_{CM})}{V_{clamp}}$ Test Equipment Scope — Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT

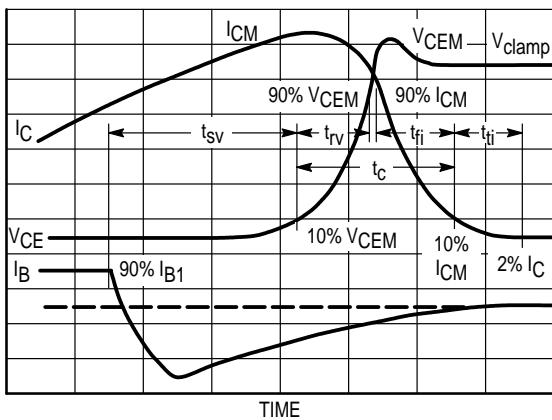


Figure 7. Inductive Switching Measurements

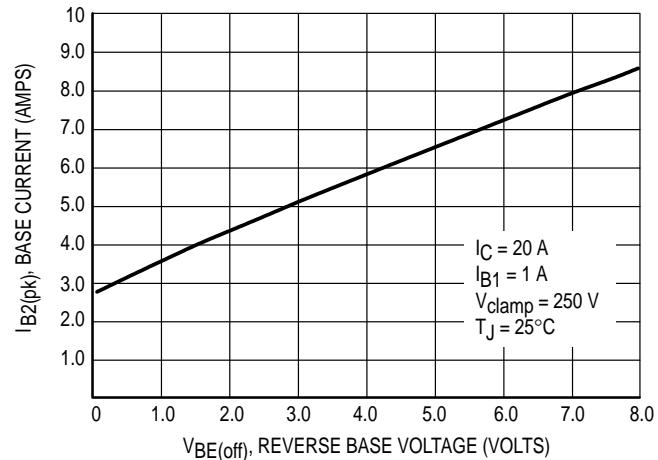


Figure 8. Typical Peak Reverse Base Current

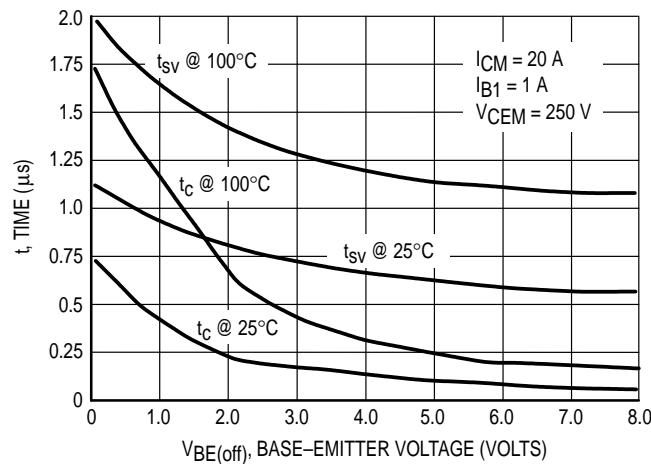


Figure 9. Typical Inductive Switching Times

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_B1 to 10% V_{CEM}

t_{rv} = Voltage Rise Time, 10–90% V_{CEM}

t_{fi} = Current Fall Time, 90–10% I_{CM}

t_{ti} = Current Tail, 10–2% I_{CM}

t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is

shown in Figure 7 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = \frac{1}{2} V_{CC} I_C t_c f$$

In general, $t_{rv} + t_{fi} \approx t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING

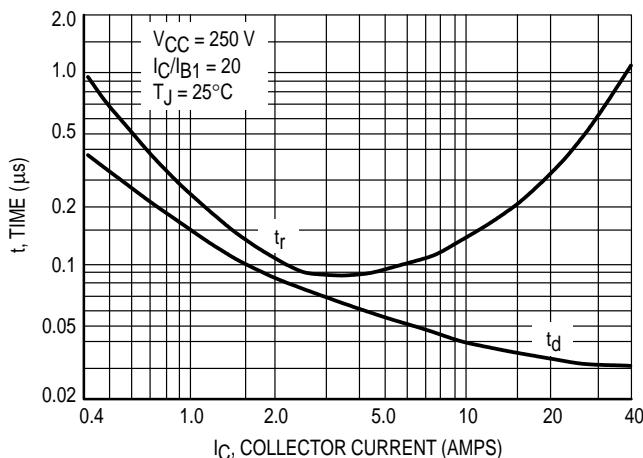


Figure 10. Typical Turn-On Switching Times

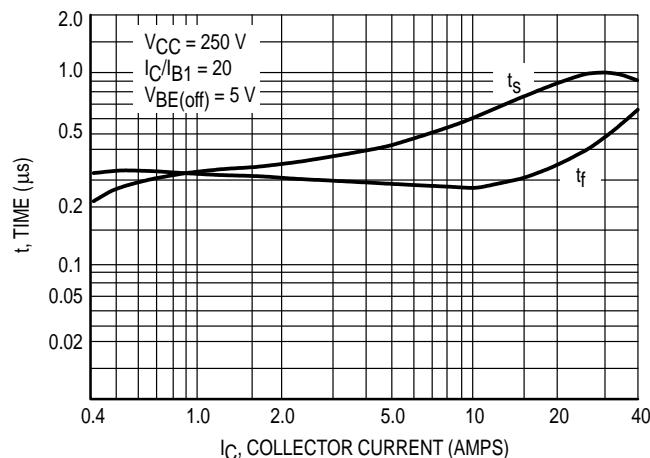


Figure 11. Typical Turn-Off Switching Times

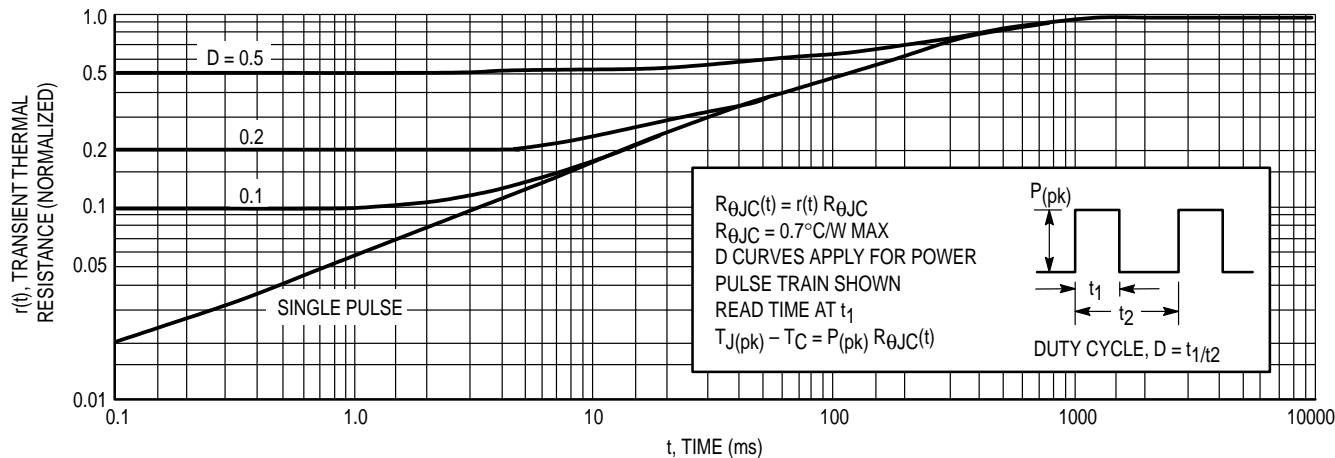


Figure 12. Thermal Response

The Safe Operating Area figures shown in Figures 13 and 14 are specified for these devices under the test conditions shown.

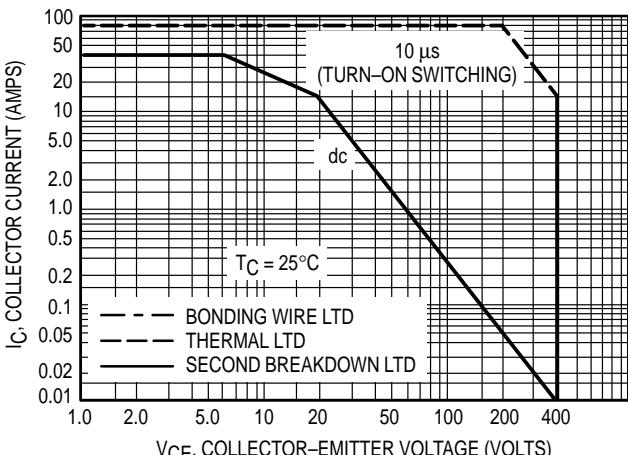


Figure 13. Maximum Forward Bias Safe Operating Area

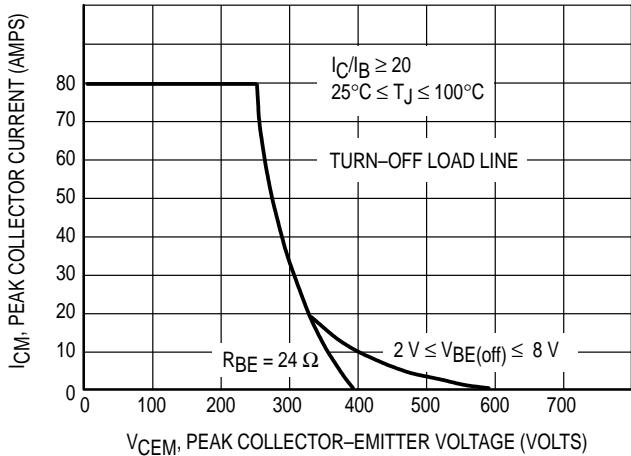


Figure 14. Maximum RBSOA, Reverse Bias Safe Operating Area

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on $T_C = 25^\circ\text{C}$; $T_J(\text{pk})$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^\circ\text{C}$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_J(\text{pk})$ may be calculated from the data in Figure 12. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.


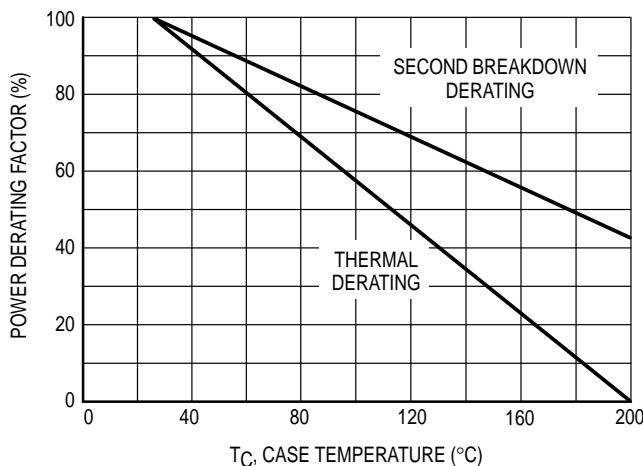


Figure 15. Power Derating

PACKAGE DIMENSIONS

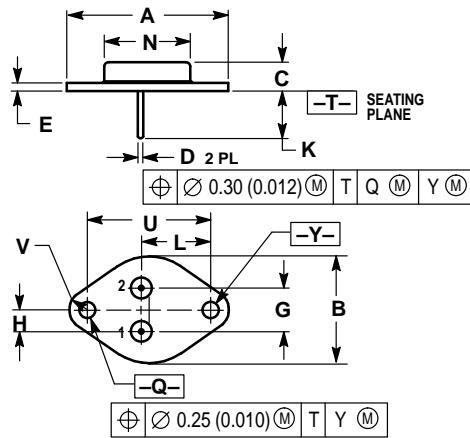

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.530	REF	38.86	REF
B	0.990	1.050	25.15	26.67
C	0.250	0.335	6.35	8.51
D	0.057	0.063	1.45	1.60
E	0.060	0.070	1.53	1.77
G	0.430	BSC	10.92	BSC
H	0.215	BSC	5.46	BSC
K	0.440	0.480	11.18	12.19
L	0.665	BSC	16.89	BSC
N	0.760	0.830	19.31	21.08
Q	0.151	0.165	3.84	4.19
U	1.187	BSC	30.15	BSC
V	0.131	0.188	3.33	4.77

STYLE 1:
 PIN 1. BASE
 2. Emitter
 CASE: COLLECTOR

CASE 197A-05
 TO-204AE (TO-3)
 ISSUE J

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447 **JAPAN:** Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141,
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609 **ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298
– <http://sps.motorola.com/mfax/>

HOME PAGE: <http://motorola.com/sps/>