

# NPN SILICON RF POWER TRANSISTOR

**DESCRIPTION:**

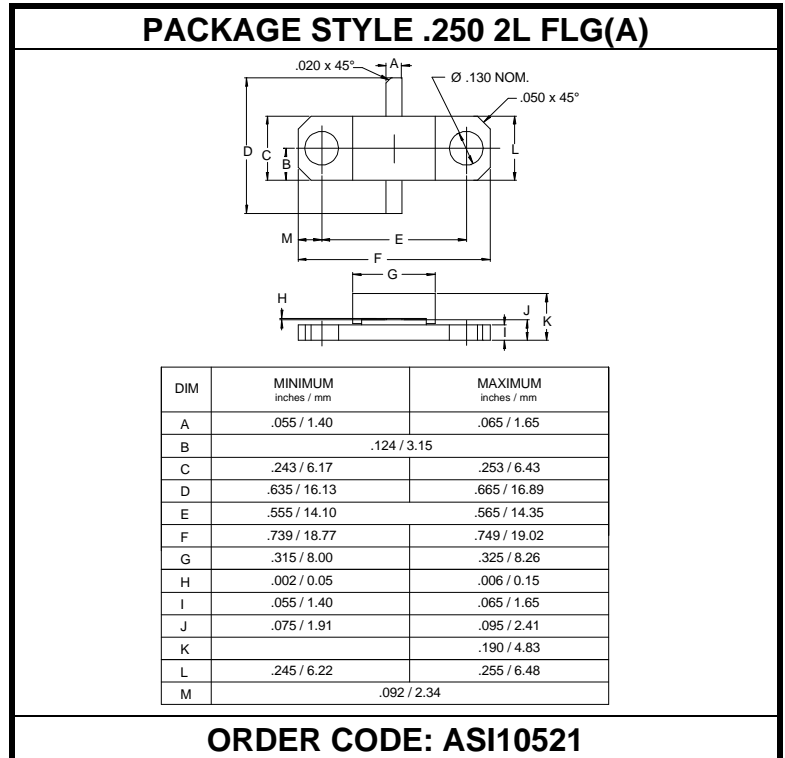
The **ASI ASAT30** is Designed for

**FEATURES:**

- 
- 
- **Omnigold™** Metalization System

**MAXIMUM RATINGS**

<b>I<sub>C</sub></b>	10 A
<b>V<sub>CB</sub></b>	60 V
<b>V<sub>CE</sub></b>	35 V
<b>P<sub>DISS</sub></b>	140 W @ T <sub>C</sub> = 25 °C
<b>T<sub>J</sub></b>	-65 °C to +200 °C
<b>T<sub>STG</sub></b>	-65 °C to +150 °C
<b>θ<sub>JC</sub></b>	3.5 °C/W


**CHARACTERISTICS** T<sub>C</sub> = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
<b>BV<sub>CEO</sub></b>	I <sub>C</sub> = 50 mA	35			<b>V</b>
<b>BV<sub>CER</sub></b>	I <sub>C</sub> = 50 mA      R <sub>BE</sub> = 10 Ω	60			<b>V</b>
<b>BV<sub>EBO</sub></b>	I <sub>E</sub> = 10 Ma	4.0			<b>V</b>
<b>I<sub>CES</sub></b>	V <sub>E</sub> = 28 V			5	<b>mA</b>
<b>h<sub>FE</sub></b>	V <sub>CE</sub> = 5.0 V      I <sub>C</sub> = 1.0 A	10		100	<b>---</b>
<b>P<sub>GE</sub></b>	V <sub>CC</sub> = 28 V      P <sub>OUT</sub> = 30 W      f = 1.65	9.0			<b>dB</b>
<b>η<sub>C</sub></b>	V <sub>CC</sub> = 28 V      P <sub>OUT</sub> = 30 W      f = 1.65	50			<b>%</b>