

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## **74HC/HCT93** 4-bit binary ripple counter

Product specification  
File under Integrated Circuits, IC06

December 1990

**Philips**  
**Semiconductors**



**PHILIPS**

**4-bit binary ripple counter****74HC/HCT93****FEATURES**

- Various counting modes
- Asynchronous master reset
- Output capability: standard
- I<sub>cc</sub> category: MSI

**GENERAL DESCRIPTION**

The 74HC/HCT93 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL (LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT93 are 4-bit binary ripple counters. The devices consist of four master-slave flip-flops internally connected to provide a

divide-by-two section and a divide-by-eight section. Each section has a separate clock input ( $\overline{CP}_0$  and  $\overline{CP}_1$ ) to initiate state changes of the counter on the HIGH-to-LOW clock transition. State changes of the  $Q_n$  outputs do not occur simultaneously because of internal ripple delays. Therefore, decoded output signals are subject to decoding spikes and should not be used for clocks or strobes.

A gated AND asynchronous master reset (MR<sub>1</sub> and MR<sub>2</sub>) is provided which overrides both clocks and resets (clears) all flip-flops.

Since the output from the divide-by-two section is not internally connected to the succeeding stages,

the device may be operated in various counting modes. In a 4-bit ripple counter the output  $Q_0$  must be connected externally to input  $CP_1$ . The input count pulses are applied to clock input  $\overline{CP}_0$ . Simultaneous frequency divisions of 2, 4, 8 and 16 are performed at the  $Q_0$ ,  $Q_1$ ,  $Q_2$  and  $Q_3$  outputs as shown in the function table. As a 3-bit ripple counter the input count pulses are applied to input  $CP_1$ .

Simultaneous frequency divisions of 2, 4 and 8 are available at the  $Q_1$ ,  $Q_2$  and  $Q_3$  outputs. Independent use of the first flip-flop is available if the reset function coincides with reset of the 3-bit ripple-through counter.

**QUICK REFERENCE DATA**

GND = 0 V; T<sub>amb</sub> = 25 °C; t<sub>r</sub> = t<sub>f</sub> = 6 ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
t <sub>PHL</sub> / t <sub>PLH</sub>	propagation delay $\overline{CP}_0$ to $Q_0$		12	15	ns
f <sub>max</sub>	maximum clock frequency	C <sub>L</sub> = 15 pF; V <sub>CC</sub> = 5 V	100	77	MHz
C <sub>I</sub>	input capacitance		3.5	3.5	pF
C <sub>PD</sub>	power dissipation capacitance per package	notes 1 and 2	22	22	pF

**Notes**

1. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f<sub>i</sub> = input frequency in MHz; f<sub>o</sub> = output frequency in MHz

$\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs

C<sub>L</sub> = output load capacitance in pF; V<sub>CC</sub> = supply voltage in V

2. For HC the condition is V<sub>I</sub> = GND to V<sub>CC</sub>; for HCT the condition is V<sub>I</sub> = GND to V<sub>CC</sub> - 1.5 V

**ORDERING INFORMATION**




See "74HC/HCT/HCU/HCMOS Logic Package Information".

## 4-bit binary ripple counter

74HC/HCT93

## PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
1	$\overline{CP}_1$	clock input 2 <sup>nd</sup> , 3 <sup>rd</sup> and 4 <sup>th</sup> section (HIGH-to-LOW, edge-triggered)
2, 3	MR <sub>1</sub> , MR <sub>2</sub>	asynchronous master reset (active HIGH)
4, 6, 7, 13	n.c.	not connected
5	V <sub>CC</sub>	positive supply voltage
10	GND	ground (0 V)
12, 9, 8, 11	Q <sub>0</sub> to Q <sub>3</sub>	flip-flop outputs
14	$\overline{CP}_0$	clock input 1 <sup>st</sup> section (HIGH-to-LOW, edge-triggered)

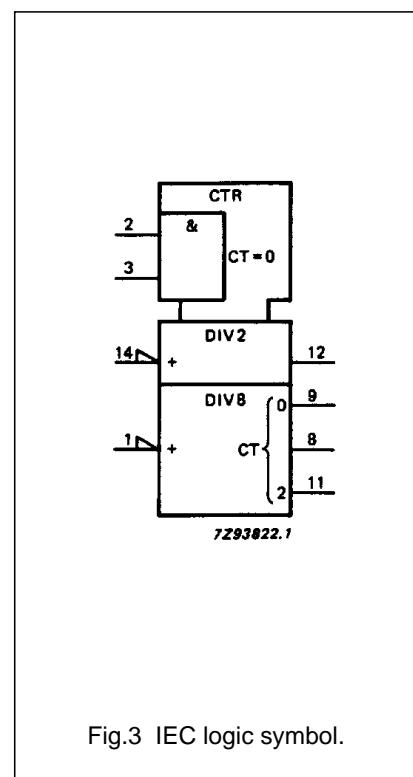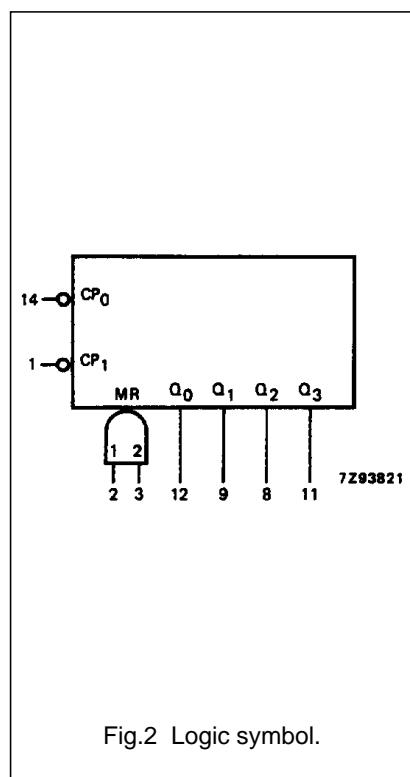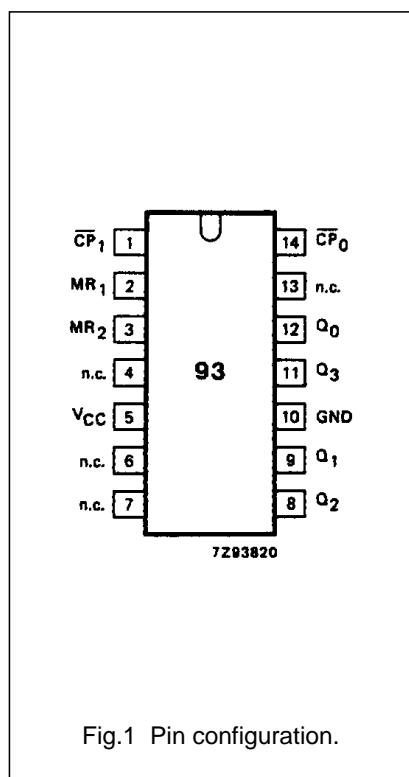

## 4-bit binary ripple counter

74HC/HCT93

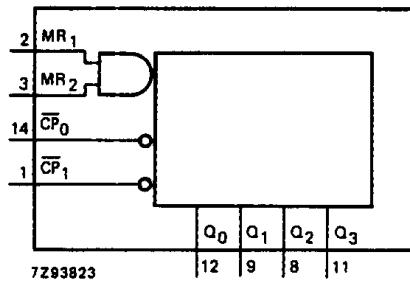


Fig.4 Functional diagram.

## FUNCTION TABLE

COUNT	OUTPUTS			
	$Q_0$	$Q_1$	$Q_2$	$Q_3$
0	L	L	L	L
1	H	L	L	L
2	L	H	L	L
3	H	H	L	L
4	L	L	H	L
5	H	L	H	L
6	L	H	H	L
7	H	H	H	L
8	L	L	L	H
9	H	L	L	H
10	L	H	L	H
11	H	H	L	H
12	L	L	H	H
13	H	L	H	H
14	L	H	H	H
15	H	H	H	H

## Notes

- Output  $Q_0$  connected to  $\overline{CP}_1$ .
- H = HIGH voltage level  
L = LOW voltage level

## MODE SELECTION

RESET INPUTS		OUTPUTS			
$MR_1$	$MR_2$	$Q_0$	$Q_1$	$Q_2$	$Q_3$
H	H	L	L	L	L
L	H				count
H	L			count	
L	L			count	

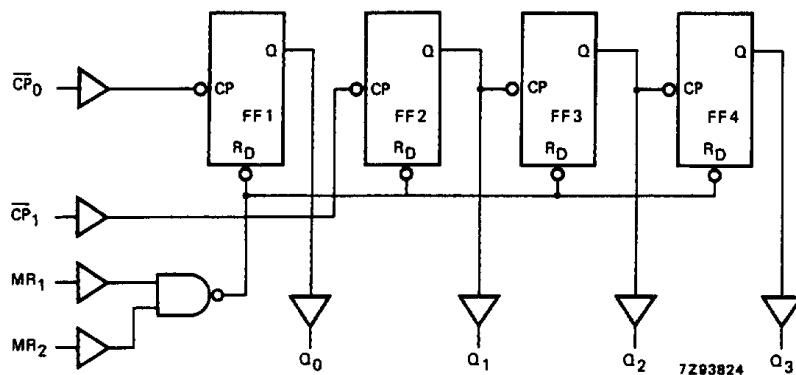


Fig.5 Logic diagram.

## 4-bit binary ripple counter

74HC/HCT93

## DC CHARACTERISTICS FOR 74HC

For the DC characteristics see "*74HC/HCT/HCU/HCMOS Logic Family Specifications*".

Output capability: standard

 $I_{CC}$  category: MSI

## AC CHARACTERISTICS FOR 74HC

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)						UNIT	TEST CONDITIONS			
		74HC							V <sub>CC</sub> (V)	WAVEFORMS		
		+25			−40 to +85		−40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay CP <sub>0</sub> to Q <sub>0</sub>		41 15 12	125 25 21		155 31 26		190 38 32	ns	2.0 4.5 6.0	Fig.6	
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay CP <sub>1</sub> to Q <sub>1</sub>		49 16 13	135 27 23		170 34 29		205 41 35	ns	2.0 4.5 6.0	Fig.6	
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay CP <sub>1</sub> to Q <sub>2</sub>		61 22 18	185 37 31		230 46 39		280 56 48	ns	2.0 4.5 6.0	Fig.6	
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay CP <sub>1</sub> to Q <sub>3</sub>		80 29 23	245 49 42		305 61 52		370 71 63	ns	2.0 4.5 6.0	Fig.6	
t <sub>PHL</sub>	propagation delay MR <sub>n</sub> to Q <sub>n</sub>		50 18 14	155 31 26		195 39 33		235 47 40	ns	2.0 4.5 6.0	Fig.7	
t <sub>THL</sub> / t <sub>TTLH</sub>	output transition time		19 7 6	75 15 13		95 19 16		110 22 19	ns	2.0 4.5 6.0	Fig.6	
t <sub>rem</sub>	removal time MR <sub>n</sub> to CP <sub>0</sub> , CP <sub>1</sub>	50 10 9	8 3 2		65 13 11		75 15 13		ns	2.0 4.5 6.0	Fig.7	
t <sub>w</sub>	pulse width CP <sub>0</sub> , CP <sub>1</sub>	80 16 14	14 5 4		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.6	
t <sub>w</sub>	master reset pulse width MR <sub>n</sub>	80 16 14	14 5 4		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.7	
f <sub>max</sub>	maximum clock pulse frequency CP <sub>0</sub> , CP <sub>1</sub>	6.0 30 35	30 91 108		4.8 24 28		4.0 20 24		MHz	2.0 4.5 6.0	Fig.6	

## 4-bit binary ripple counter

74HC/HCT93

## DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see "*74HC/HCT/HCU/HCMOS Logic Family Specifications*".

Output capability: standard

 $I_{CC}$  category: MSI

## Note to HCT types

The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given in the family specifications.To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
$\overline{CP}_0, \overline{CP}_1$	0.60
$MR_n$	0.40

## AC CHARACTERISTICS FOR 74HCT


GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)						UNIT	TEST CONDITIONS			
		74HCT							V <sub>CC</sub> (V)	WAVEFORMS		
		+25			−40 to +85		−40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
$t_{PHL}/t_{PLH}$	propagation delay $\overline{CP}_0$ to $Q_0$		18	34		43		51	ns	4.5	Fig.6	
$t_{PHL}/t_{PLH}$	propagation delay $\overline{CP}_1$ to $Q_1$		18	34		43		51	ns	4.5	Fig.6	
$t_{PHL}/t_{PLH}$	propagation delay $\overline{CP}_1$ to $Q_2$		24	46		58		69	ns	4.5	Fig.6	
$t_{PHL}/t_{PLH}$	propagation delay $\overline{CP}_1$ to $Q_3$		30	58		73		87	ns	4.5	Fig.6	
$t_{PHL}$	propagation delay $MR_n$ to $Q_n$		17	33		41		50	ns	4.5	Fig.7	
$t_{THL}/t_{TLH}$	output transition time		7	15		19		22	ns	4.5	Fig.6	
$t_{rem}$	removal time $MR_n$ to $\overline{CP}_0, \overline{CP}_1$	10	3		13		15		ns	4.5	Fig.7	
$t_W$	pulse width $\overline{CP}_0, \overline{CP}_1$	16	7		20		24		ns	4.5	Fig.6	
$t_W$	master reset pulse width $MR_n$	16	5		20		24		ns	4.5	Fig.7	
$f_{max}$	maximum clock pulse frequency $\overline{CP}_0, \overline{CP}_1$	30	70		24		20		MHz	4.5	Fig.6	

## 4-bit binary ripple counter


74HC/HCT93

## AC WAVEFORMS

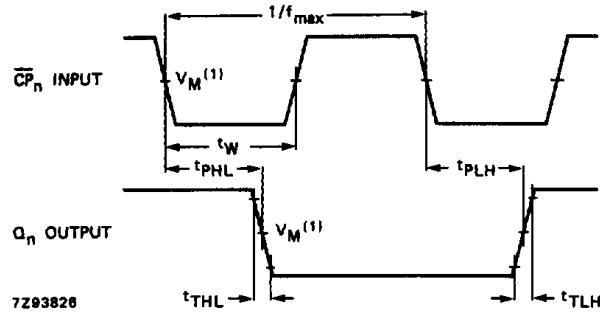

(1) HC :  $V_M = 50\%$ ;  $V_I = \text{GND to } V_{CC}$ .  
HCT:  $V_M = 1.3 \text{ V}$ ;  $V_I = \text{GND to } 3 \text{ V}$ .

Fig.6 Waveforms showing the clock ( $\overline{CP}_n$ ) to output ( $Q_n$ ) propagation delays, the clock pulse width, output transition times and the maximum clock pulse frequency.

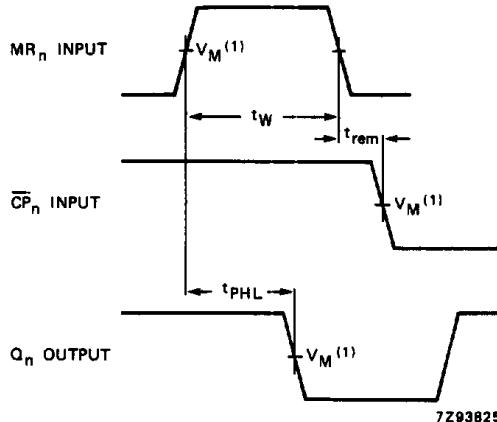

(1) HC :  $V_M = 50\%$ ;  $V_I = \text{GND to } V_{CC}$ .  
HCT:  $V_M = 1.3 \text{ V}$ ;  $V_I = \text{GND to } 3 \text{ V}$ .

Fig.7 Waveforms showing the master reset ( $MR_n$ ) pulse width, the master reset to output ( $Q_n$ ) propagation delays and the master reset to clock ( $\overline{CP}_n$ ) removal time.

## PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".