
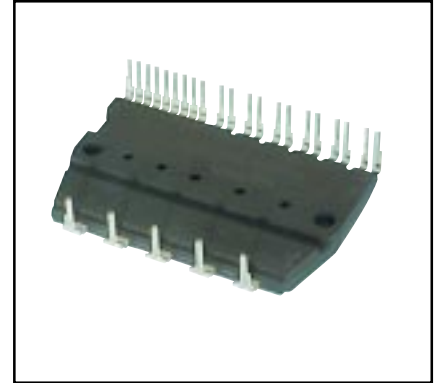


Intellimod™ Module Dual-In-Line Intelligent Power Module 5 Amperes/600 Volts

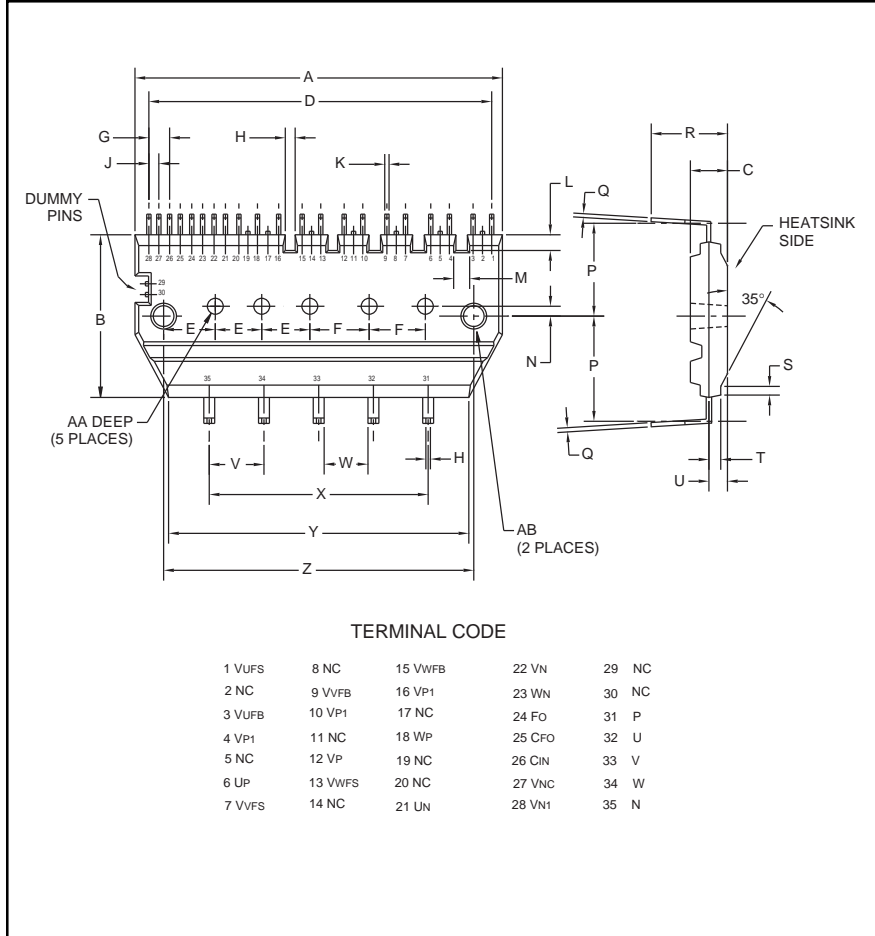

Description:

DIP and mini-DIP IPMs are intelligent power modules that integrate power devices, drivers, and protection circuitry in an ultra compact dual-in-line transfer-mold package for use in driving small three phase motors. Use of 4th generation IGBTs, DIP packaging, and application specific HVICs allow the designer to reduce inverter size and overall design time.

Features:

- Compact Packages
- Single Power Supply
- Integrated HVICs
- Direct Connection to CPU
- Optimized for 15kHz Operation

Applications:

- Washing Machines
- Refrigerators
- Air Conditioners
- Small Servo Motors
- Small Motor Control

Ordering Information:

PS21552-G is a 600V, 5 Ampere Mini-DIP Intelligent Power Module.

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| A | 1.93 | 49.0 |
| B | 1.20 | 30.5 |
| C | 0.20 | 5.0 |
| D | 1.82 | 46.23 |
| E | 0.25 | 6.25 |
| F | 0.32 | 8.0 |
| G | 0.14 | 3.556 |
| H | 0.04 | 1.0 |
| J | 0.07 | 1.778 |
| K | 0.02 | 0.5 |
| L | 0.06 | 1.5 |
| M | 0.07 Min. | 1.8 Min. |
| N | 0.30 | 0.75 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| P | 0.69 | 17.4 |
| Q | 0.02 | 0.5 |
| R | 0.41 | 10.5 |
| S | 0.05 | 1.2 |
| T | 0.05 | 1.25 |
| U | 0.10 | 2.5 |
| V | 0.30 | 7.62 |
| W | 0.16 Min. | 4.0 Min. |
| X | 1.20 | 30.48 |
| Y | 1.61 | 41.0 |
| Z | 1.65 | 42.0 |
| AA | 0.08 Dia. | 2.0 Dia. |
| AB | 0.13 Dia. | 3.3 Dia. |

PS21552-G
Intellimod™ Module
Dual-In-Line Intelligent Power Module
 5 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PS21552-G | Units |
|--|------------------------|------------|------------------|
| Power Device Junction Temperature* | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Heatsink Temperature (See T_f Measure Point Illustration) | T_f | -20 to 100 | $^\circ\text{C}$ |
| Mounting Torque, M3 Mounting Screws | — | 8.5 | in-lb |
| Module Weight (Typical) | — | 20 | Grams |
| Heatsink Flatness | — | -50 to 100 | μm |
| Self-protection Supply Voltage Limit (Short Circuit Protection Capability)** | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal, Connection Pins to Heatsink Plate | V_{ISO} | 2500 | Volts |

*The maximum junction temperature rating of the power chips integrated within the DIP-IPM is 150°C ($@T_f \leq 100^\circ\text{C}$). However, to ensure safe operation of the DIP-IPM, the average junction temperature should be limited to $T_{j(\text{avg})} \leq 125^\circ\text{C}$ ($@T_f \leq 100^\circ\text{C}$).

** $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$, Non-repetitive, Less than $2\mu\text{s}$

IGBT Inverter Sector

| | | | |
|---|------------------------|-----|---------|
| Collector-Emitter Voltage | V_{CES} | 600 | Volts |
| Collector Current, \pm ($T_C = 25^\circ\text{C}$) | I_C | 5 | Amperes |
| Peak Collector Current, \pm ($T_C = 25^\circ\text{C}$, Instantaneous Value (Pulse)) | I_{CP} | 10 | Amperes |
| Supply Voltage (Applied between P - N) | V_{CC} | 450 | Volts |
| Supply Voltage, Surge (Applied between P - N) | $V_{\text{CC(surge)}}$ | 500 | Volts |
| Collector Dissipation ($T_C = 25^\circ\text{C}$, per 1 Chip) | P_C | 20 | Watts |

Control Sector


| | | | |
|---|------------------|------------------|-------|
| Supply Voltage (Applied between $V_{P1}-V_{\text{NC}}$, $V_{N1}-V_{\text{NC}}$) | V_D | 20 | Volts |
| Supply Voltage (Applied between $V_{\text{UFB}}-V_{\text{UFS}}$, $V_{\text{VFB}}-V_{\text{VFS}}$, $V_{\text{WFB}}-V_{\text{WFS}}$) | V_{DB} | 20 | Volts |
| Input Voltage (Applied between U_P , V_P , W_P-V_{NC} , U_N , V_N , W_N-V_{NC}) | V_{CIN} | -0.5 ~ 5.5 | Volts |
| Fault Output Supply Voltage (Applied between F_O-V_{NC}) | V_{FO} | -0.5 ~ $V_D+0.5$ | Volts |
| Fault Output Current (Sink Current at F_O Terminal) | I_{FO} | 15 | mA |
| Current Sensing Input Voltage (Applied between $C_{\text{IN}}-V_{\text{NC}}$) | V_{SC} | -0.5 ~ $V_D+0.5$ | Volts |

PS21552-G
Intellimod™ Module
Dual-In-Line Intelligent Power Module
 5 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|---------------|--|------|------|------|---------------|
| IGBT Inverter Sector | | | | | | |
| Collector Cutoff Current | I_{CES} | $V_{CE} = V_{CES}, T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{CE} = V_{CES}, T_j = 125^\circ\text{C}$ | — | — | 10 | mA |
| Diode Forward Voltage | V_{EC} | $T_j = 25^\circ\text{C}, -I_C = 5\text{A}, V_{CIN} = 5\text{V}$ | — | 2.20 | 3.00 | Volts |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 5\text{A}, T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{CIN} = 0\text{V}$ | — | 1.80 | 2.45 | Volts |
| | | $I_C = 5\text{A}, T_j = 125^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{CIN} = 0\text{V}$ | — | 1.90 | 2.60 | Volts |
| Inductive Load Switching Times | t_{on} | $V_{CC} = 300\text{V}, V_D = 15\text{V},$ | 0.10 | 0.60 | 1.10 | μS |
| | t_{rr} | $I_C = 5\text{A},$ | — | 0.10 | — | μS |
| | $t_{C(on)}$ | $T_j = 125^\circ\text{C},$ | — | 0.20 | 0.60 | μS |
| | t_{off} | Inductive Load (Upper-Lower Arm), | — | 1.10 | 2.20 | μS |
| | $t_{C(off)}$ | $V_{CIN} = 5\text{V(off)}, 0\text{V(on)}$ | — | 0.35 | 1.25 | μS |

T_f Measure Point

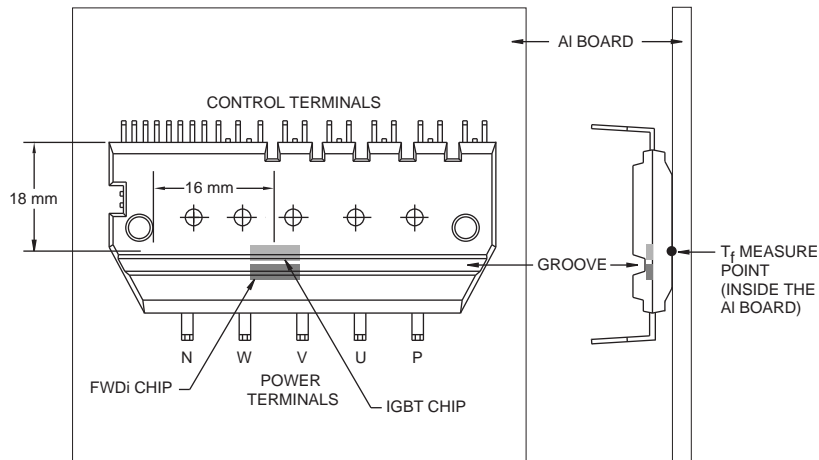

PS21552-G
Intellimod™ Module
Dual-In-Line Intelligent Power Module
 5 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------|---------------|---|------|------|------|---------------|
| Control Sector | | | | | | |
| Supply Voltage | V_D | Applied between V_{P1} - V_{NC} , V_{N1} - V_{NC} | 13.5 | 15.0 | 16.5 | Volts |
| | V_{DB} | Applied between V_{UFB} - V_{UFS} , V_{VFB} - V_{VFS} , V_{WFB} - V_{WFS} | 13.5 | 15.0 | 16.5 | Volts |
| Circuit Current | I_D | $V_D = 15\text{V}$, $V_{CIN} = 5\text{V}$, $V_{DB} = 15\text{V}$, Total of V_{P1} - V_{NC} , V_{N1} - V_{NC} | — | 4.25 | 8.50 | mA |
| | | $V_D = 15\text{V}$, $V_{CIN} = 0\text{V}$, $V_{DB} = 15\text{V}$, Total of V_{P1} - V_{NC} , V_{N1} - V_{NC} | — | 4.95 | 9.70 | mA |
| | I_D | $V_D = 15\text{V}$, $V_{CIN} = 5\text{V}$, $V_{DB} = 15\text{V}$, V_{UFB} - V_{UFS} , V_{VFB} - V_{VFS} , V_{WFB} - V_{WFS} | — | 0.50 | 1.00 | mA |
| | | $V_D = 15\text{V}$, $V_{CIN} = 0\text{V}$, $V_{DB} = 15\text{V}$, V_{UFB} - V_{UFS} , V_{VFB} - V_{VFS} , V_{WFB} - V_{WFS} | — | 0.50 | 1.00 | mA |
| Fault Output Voltage | V_{FOH} | $V_{SC} = 0\text{V}$, F_O Circuit: 10k Ω to 5V Pull-up | 4.9 | — | — | Volts |
| | V_{FOL} | $V_{SC} = 1\text{V}$, F_O Circuit: 10k Ω to 5V Pull-up | — | 0.8 | 1.2 | Volts |
| | $V_{FO(sat)}$ | $V_{SC} = 1\text{V}$, $I_{FO} = 15\text{mA}$ | 0.8 | 1.2 | 1.8 | Volts |
| PWM Input Frequency | f_{PWM} | $T_j \leq 125^\circ\text{C}$, $T_f \leq 100^\circ\text{C}$ | — | 15 | — | kHz |
| Allowable Dead Time | t_{DEAD} | Relates to Corresponding Input Signal for Blocking Arm Shoot-through ($T_f \leq 100^\circ\text{C}$) | 3 | — | — | μS |
| Short Circuit Trip Level* | $V_{SC(ref)}$ | $T_j = 25^\circ\text{C}$, $V_D = 15\text{V}^*$ | 0.45 | 0.5 | 0.55 | Volts |
| Supply Circuit Under-voltage | UV_{DBt} | Trip Level, $T_j \leq 125^\circ\text{C}$ | 10.0 | — | 12.0 | Volts |
| | UV_{DBr} | Reset Level, $T_j \leq 125^\circ\text{C}$ | 10.5 | — | 12.5 | Volts |
| | UV_{Dt} | Trip Level, $T_j \leq 125^\circ\text{C}$ | 10.3 | — | 12.5 | Volts |
| | UV_{Dr} | Reset Level, $T_j \leq 125^\circ\text{C}$ | 10.8 | — | 13.0 | Volts |
| Fault Output Pulse Width** | t_{FO} | $C_{FO} = 22\text{nF}$ | 1.0 | 1.8 | — | mS |
| ON Threshold Voltage (H-side) | $V_{th(on)}$ | Applied between U_P , V_P , W_P - V_{NC} | 0.8 | 1.4 | 2.0 | Volts |
| OFF Threshold Voltage (H-side) | $V_{th(off)}$ | | 2.5 | 3.0 | 4.0 | Volts |
| ON Threshold Voltage (L-side) | $V_{th(on)}$ | Applied between U_N , V_N , W_N - V_{NC} | 0.8 | 1.4 | 2.0 | Volts |
| OFF Threshold Voltage (L-side) | $V_{th(off)}$ | | 2.5 | 3.0 | 4.0 | Volts |

* Short Circuit protection operates only at the low-arms. Please select the value of the external shunt resistor such that the SC trip level is less than 8.5A.

**Fault signal is asserted when the low-arm short circuit or control supply under-voltage protective functions operate. The fault output pulse-width t_{FO} depends on the capacitance value of C_{FO} according to the following approximate equation: $C_{FO} = (12.2 \times 10^{-6}) \times t_{FO} (F)$.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS21552-G
Intellimod™ Module
Dual-In-Line Intelligent Power Module
 5 Amperes/600 Volts

Thermal Characteristics

| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|----------------------|----------------|-----------|------|------|------|---------|
| Junction to Heatsink | $R_{th(j-f)Q}$ | Each IGBT | — | — | 6.0 | °C/Watt |
| | $R_{th(j-f)D}$ | Each FWDi | — | — | 6.5 | °C/Watt |

Recommended Conditions for Use

| Characteristic | Symbol | Condition | Min. | Typ. | Value | Units |
|---------------------------------|--------------------------|--|------|------|-----------|------------|
| Supply Voltage | V_{CC} | Applied between P-N Terminals | 0 | 300 | 400 | Volts |
| Control Supply Voltage | V_D | Applied between $V_{P1-V_{NC}}$, $V_{N1-V_{NC}}$ | 13.5 | 15.0 | 16.5 | Volts |
| | V_{DB} | Applied between $V_{UFB-V_{UFS}}$, $V_{VFB-V_{VFS}}$, $V_{WFB-V_{WFS}}$ | 13.5 | 15.0 | 16.5 | Volts |
| Control Supply dv/dt | dV_D/dt , dV_{DB}/dt | | -1 | — | 1 | V/ μ s |
| Input ON Voltage | $V_{CIN(on)}$ | Applied between U_P , V_P , W_P-V_{NC} | | | 0 ~ 0.65 | Volts |
| Input OFF Voltage | $V_{CIN(off)}$ | Applied between U_N , V_N , W_N-V_{NC} | | | 4.0 ~ 5.5 | Volts |
| PWM Input Frequency | f_{PWM} | $T_j \leq 125^\circ\text{C}$, $T_f \leq 100^\circ\text{C}$ | — | 15 | — | kHz |
| Arm Shoot-through Blocking Time | t_{DEAD} | For Each Input Signal | 3 | — | — | μ s |

