
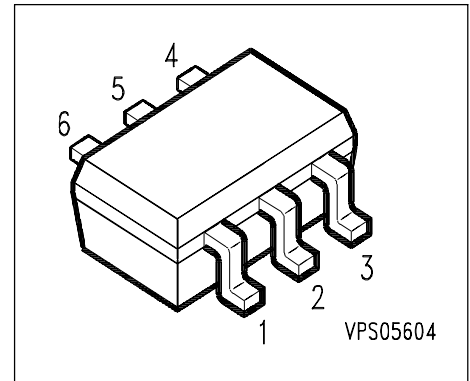


## PNP Silicon Digital Transistor Array

- Switching circuit, inverter, interface circuit, driver circuit
- Built in resistor ( $R_1 = 10k\Omega$ ,  $R_2 = 10k\Omega$ )



| Type     | Marking | Ordering Code | Pin Configuration |      |      | Package        |         |
|----------|---------|---------------|-------------------|------|------|----------------|---------|
| BCR 183S | WMs     | Q62702-C2377  | 1=E1              | 2=B1 | 3=C2 | 4=E2 5=B2 6=C1 | SOT-363 |

### Maximum Ratings

| Parameter                                          | Symbol      | Values         | Unit             |
|----------------------------------------------------|-------------|----------------|------------------|
| Collector-emitter voltage                          | $V_{CEO}$   | 50             | V                |
| Collector-base voltage                             | $V_{CBO}$   | 50             |                  |
| Emitter-base voltage                               | $V_{EBO}$   | 10             |                  |
| Input on Voltage                                   | $V_{i(on)}$ | 20             |                  |
| DC collector current                               | $I_C$       | 100            | mA               |
| Total power dissipation, $T_S = 115^\circ\text{C}$ | $P_{tot}$   | 250            | mW               |
| Junction temperature                               | $T_j$       | 150            | $^\circ\text{C}$ |
| Storage temperature                                | $T_{stg}$   | - 65 ... + 150 |                  |

### Thermal Resistance

|                                |            |            |     |
|--------------------------------|------------|------------|-----|
| Junction ambient <sup>1)</sup> | $R_{thJA}$ | $\leq 275$ | K/W |
| Junction - soldering point     | $R_{thJS}$ | $\leq 140$ |     |

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 0.5cm<sup>2</sup> Cu

## Electrical Characteristics at $T_A=25^\circ\text{C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

### DC Characteristics

|                                                                                        |               |     |    |      |                  |
|----------------------------------------------------------------------------------------|---------------|-----|----|------|------------------|
| Collector-emitter breakdown voltage<br>$I_C = 100 \mu\text{A}, I_B = 0$                | $V_{(BR)CEO}$ | 50  | -  | -    | V                |
| Collector-base breakdown voltage<br>$I_C = 10 \mu\text{A}, I_B = 0$                    | $V_{(BR)CBO}$ | 50  | -  | -    |                  |
| Collector cutoff current<br>$V_{CB} = 40 \text{ V}, I_E = 0$                           | $I_{CBO}$     | -   | -  | 100  | nA               |
| Emitter cutoff current<br>$V_{EB} = 10 \text{ V}, I_C = 0$                             | $I_{EBO}$     | -   | -  | 0.75 | $\mu\text{A}$    |
| DC current gain<br>$I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$                          | $h_{FE}$      | 30  | -  | -    | -                |
| Collector-emitter saturation voltage 1)<br>$I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$ | $V_{CEsat}$   | -   | -  | 0.3  | V                |
| Input off voltage<br>$I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$                     | $V_{i(off)}$  | 0.8 | -  | 1.5  |                  |
| Input on Voltage<br>$I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$                       | $V_{i(on)}$   | 1   | -  | 2.5  |                  |
| Input resistor                                                                         | $R_1$         | 7   | 10 | 13   | $\text{k}\Omega$ |
| Resistor ratio                                                                         | $R_1/R_2$     | 0.9 | 1  | 1.1  | -                |


### AC Characteristics

|                                                                                          |          |   |     |   |     |
|------------------------------------------------------------------------------------------|----------|---|-----|---|-----|
| Transition frequency<br>$I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$ | $f_T$    | - | 200 | - | MHz |
| Collector-base capacitance<br>$V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$                 | $C_{cb}$ | - | 3   | - | pF  |

1) Pulse test:  $t < 300 \mu\text{s}$ ;  $D < 2\%$


### DC Current Gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$  (common emitter configuration)

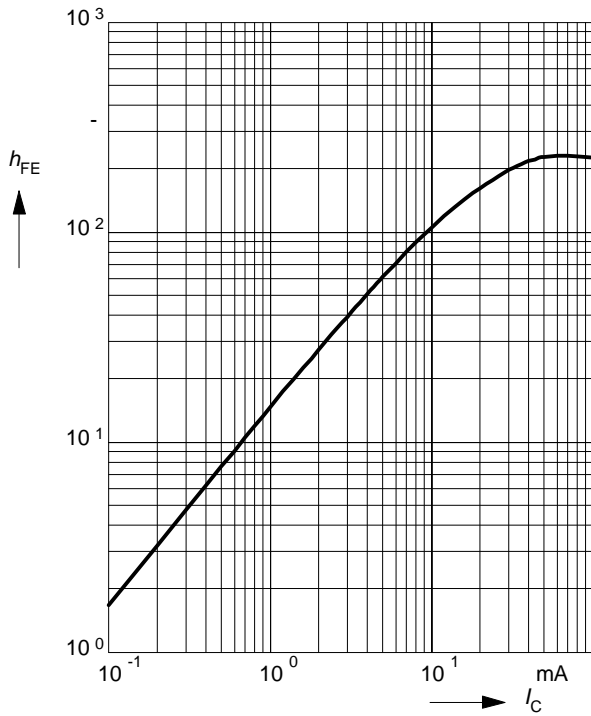


### Collector-Emitter Saturation Voltage

$V_{CEsat} = f(I_C), h_{FE} = 20$

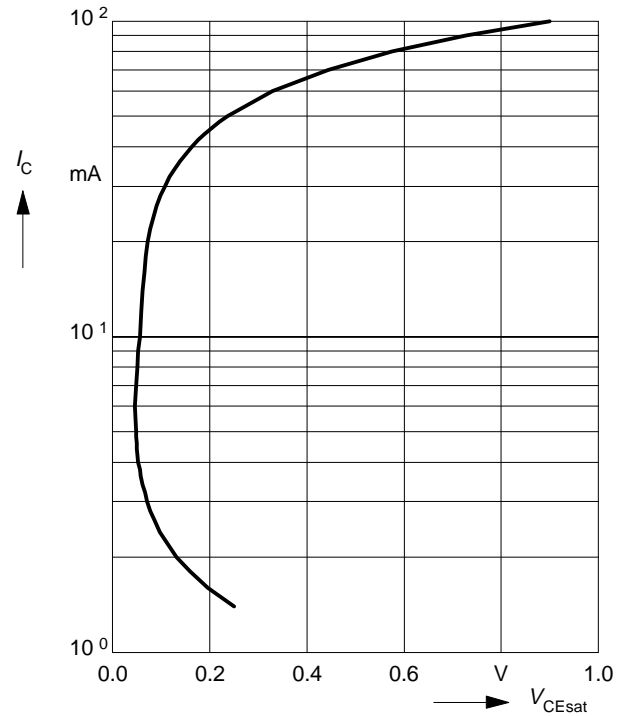


### Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$  (common emitter configuration)

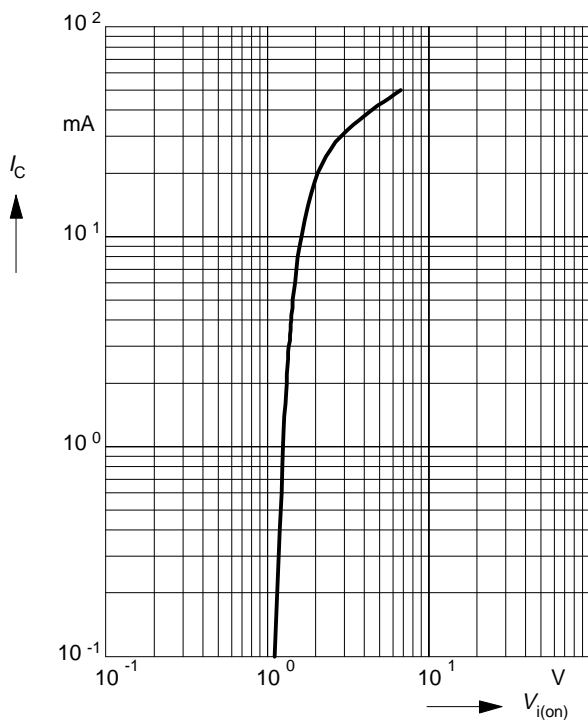


### Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5V$  (common emitter configuration)

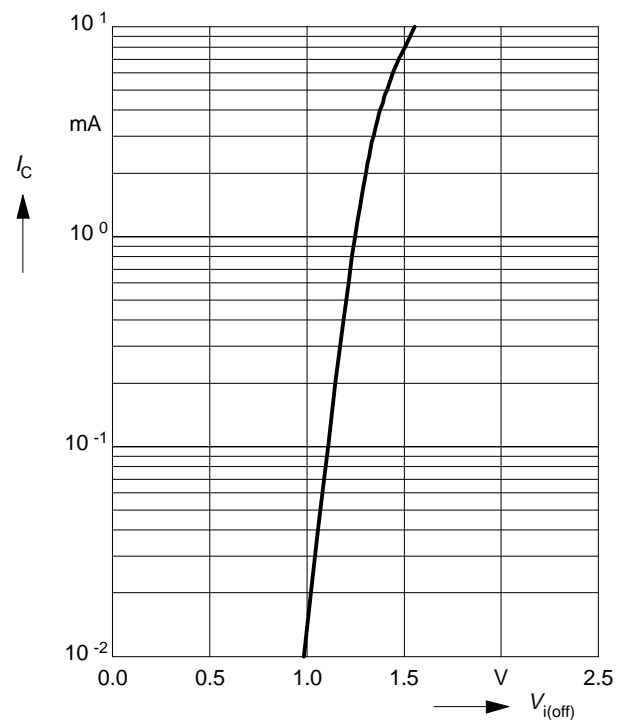


### Total power dissipation $P_{tot} = f(T_A^*; T_S)$

\* Package mounted on epoxy

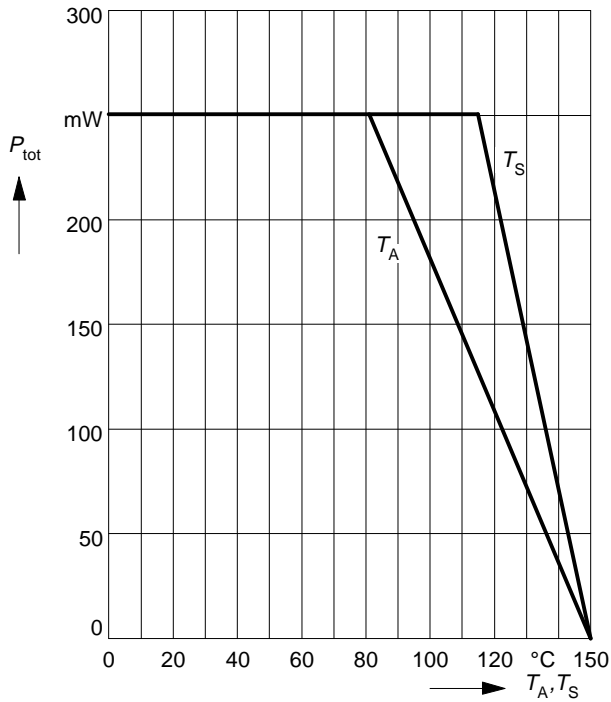

### Permissible Pulse Load $R_{thJS} = f(t_p)$

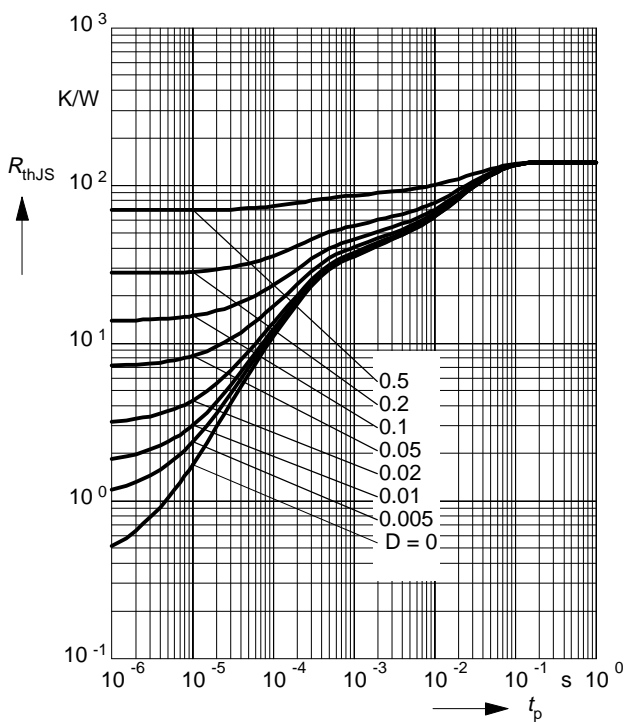

### Permissible Pulse Load $P_{totmax} / P_{totDC} = f(t_p)$

