


PT6920 Series

**5V TO 3.3V/2.5V 25 WATT DUAL OUTPUT
INTEGRATED SWITCHING REGULATOR**

[Application Notes](#)
[Mechanical Outline](#)
[Product Selector Guide](#)

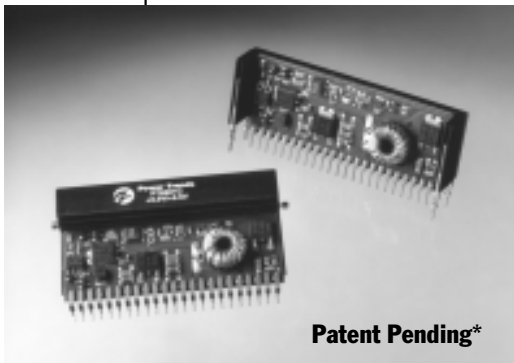


Features

- Dual Outputs:
+3.3V/6A
+2.5V/2.2A or +1.8V/1.5A
- Adjustable Output Voltage
- Remote Sense (both outputs)
- Standby Function
- Over-Temperature Protection
- Soft-Start
- Internal Sequencing
- 23-pin SIPP package

The PT6920 is a new series of 25W dual output ISRs designed to power the latest generation DSP chips. Both output voltages are independently adjustable with external resistors. In addition, the second output voltage of the PT6921 can be selected for 2.5V or 1.8V to accommodate the next generation of DSP chips. The internal power sequencing of both outputs meet the latest requirements of TI's 'C6000 series DSPs.

Standard Application

C₁ = Req'd 560µF electrolytic
C₂ = Req'd 330µF electrolytic
C₃ = Optional 100µF electrolytic

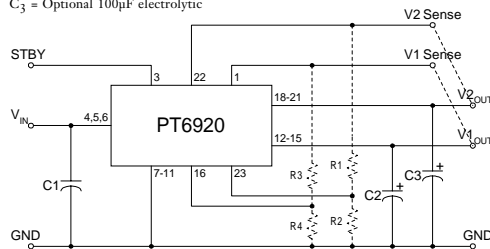

Pin-Out Information

Pin	Function	Pin	Function
1	V ₁ Remote Sense	13	V ₁ out
2	Do Not Connect	14	V ₁ out
3	STBY	15	V ₁ out
4	V _{in}	16	V ₁ Adjust
5	V _{in}	17	Do Not Connect
6	V _{in}	18	V ₂ out
7	GND	19	V ₂ out
8	GND	20	V ₂ out
9	GND	21	V ₂ out
10	GND	22	V ₂ Remote Sense
11	GND	23	V ₂ Adjust*
12	V ₁ out		

Ordering Information

PT6921□ = +3.3 Volts
+2.5/+1.8 Volts
PT6922□ = +3.3 Volts
+1.5 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

(For dimensions and PC board layout, see Package Styles 1100 and 1110.)

Note: for PT6921 only:
with pin 23 open, V₂out=2.5V
with pin 23 shorted to pin 22, V₂out=1.8V

Preliminary Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT6920 SERIES				
			Min	Typ	Max	Units	
Output Current	I _o	T _a = +60°C, 200 LFM, pkg N	V ₁ = 3.3V	0.1	—	5.5	A
			V ₂ = 2.5V	0	—	2.2	A
		T _a = +25°C, natural convection	V ₂ = 1.8V	0	—	1.75	A
			V ₂ = 1.2V	0	—	1.2	A
			V ₁ = 3.3V	0.1	—	6.0	A
			V ₂ = 2.5V	0	—	2.2	A
			V ₂ = 1.8V	0	—	1.75	A
			V ₂ = 1.2V	0	—	1.2	A
Input Voltage Range	V _{in}	0.1A ≤ I _o ≤ I _{max}	4.5	—	5.5	V	
Output Voltage Tolerance	ΔV _o	V _{in} = +5V, I _o = I _{max} , both outputs 0°C ≤ T _a ≤ +65°C	V _o -0.1	—	V _o +0.1	V	
Line Regulation	Reg _{line}	4.5V ≤ V _{in} ≤ 5.5V, I _o = I _{max}	V ₁ = 3.3V V ₂ = 2.5V	— —	±7 ±7	±17 ±13	mV mV
Load Regulation	Reg _{load}	V _{in} = +5V, 0.1 ≤ I _o ≤ I _{max}	V ₁ = 3.3V V ₂ = 2.5V	— —	±17 ±4	±33 ±10	mV mV
V _o Ripple/Noise	V _n	V _{in} = +5V, I _o = I _{max}	V ₁ = 3.3V V ₂ = 2.5V	— —	50 25	—	mV mV
Transient Response with C ₂ = 330µF	t _{tr} V _{os}	I _o step between 0.5xI _{max} and I _{max} V _o over/undershoot	V ₁ = 3.3V	—	25	—	µSec
			V ₂ = 2.5V	—	60	—	mV
			V ₁ = 3.3V	—	60	—	mV
			V ₂ = 2.5V	—	60	—	mV
Efficiency	η	V _{in} = +5V, I _o = 4A total	—	75	—	—	%
Switching Frequency	f _o	4.5V ≤ V _{in} ≤ 5.5V 0.1A ≤ I _o ≤ I _{max}	475	600	725	—	kHz
Absolute Maximum Operating Temperature Range	T _a	—	0	—	+85	—	°C
Recommended Operating Temperature Range	T _a	Forced airflow = 200 LFM Over V _{in} and I _o Ranges	0	—	+65	—	°C
Storage Temperature	T _s	—	-40	—	+125	—	°C
Weight	—	Vertical/Horizontal	—	29	—	—	grams

Note: The PT6920 series requires a 560µF electrolytic capacitor on the input and a 330µF electrolytic capacitor on the output for proper operation in all applications.


* This product is the subject of one or more patents. Other patents pending.

PT6920 Series


CHARACTERISTIC DATA

PT6921, $V_{2out} = 2.5V$, $I_{2out} = 2.2A$ (See Note 1)


Total Efficiency vs I_{1out}

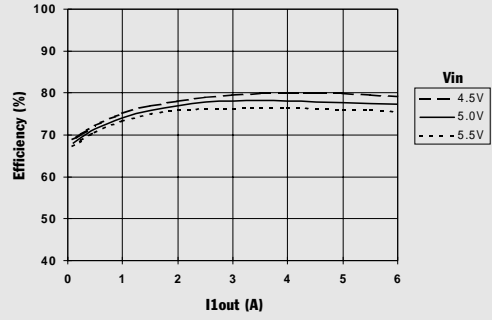


Total Power Dissipation vs I_{1out}

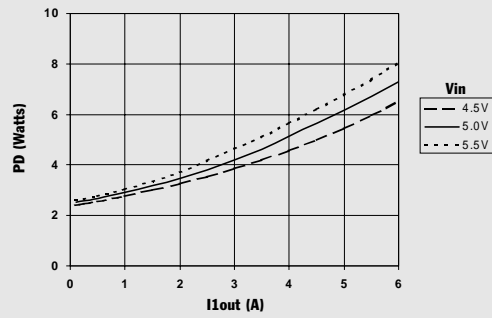

V_{1out} Ripple vs I_{1out}

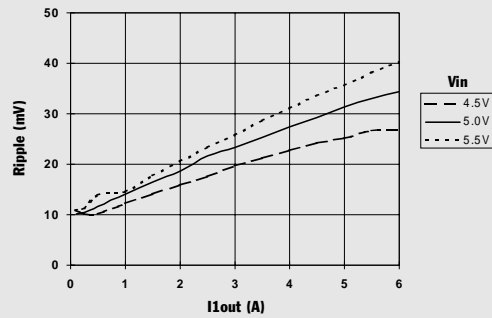

Safe Operating Area vs I_{1out}

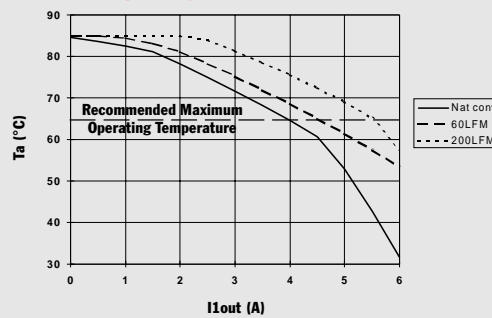

Note 1: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Application Notes **PT6920 Series**

[More Application Notes](#)

Adjusting the Output Voltage of the PT6920 Dual Output Voltage ISR

Both output voltages from the Power Trends PT6920 series ISRs can be independently adjusted higher or lower than their factory trimmed pre-set voltage. In each case only a single external resistor is required to adjust either V₁ (the voltage at V_{1out}, or V₂ (the voltage at V_{2out}). Table 1 gives the permissible adjustment range for both V₁ and V₂ for each model in the series as V_a(min) and V_a(max). *Note: V₂ must always be lower than V₁.*

V₁ Adjust Up: To increase the output, add a resistor R4 between pin 16 (V₁ Adjust) and pins 7-11 (GND).

V₁ Adjust Down: Add a resistor (R3), between pin 16 (V₁ Adjust) and pin 1 (V₁ Remote Sense).

V₂ Adjust Up: Add a resistor R2 between pin 23 (V₂ Adjust) and pins 7-11 (GND).

V₂ Adjust Down: Add a resistor (R1) between pin 23 (V₂ Adjust) and pin 22 (V₂ Remote Sense).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor.

Notes:

1. The voltage at V_{1out} and V_{2out} may be adjusted independently.
2. V₂ must always be at least 0.2V lower than V₁.
3. If V₁ is increased above 3.3V, the minimum input voltage to the ISR must also be increased. The minimum required input voltage must be (V₁ + 1.2)V or 4.5V, whichever is greater. Do not exceed 6.0V
4. Use only a single 1% resistor in either the (R3) or R4 location

tion to adjust V₁, and in the (R1) or R2 location to adjust V₂. Place the resistor as close to the ISR as possible.

5. Never connect capacitors to either the V₁ Adjust or V₂ Adjust pins. Any capacitance added to these control pins will affect the stability of the respective regulated output.
6. To comply with the ISRs power dissipation limits, changes made to either output voltage (V₁ or V₂) may affect the maximum current available from both outputs. For more information, consult the related applications note, "Determining the Maximum Output Current for the PT6920 Series Dual Output ISR."

The adjust up and adjust down resistor values can also be calculated using the following formulae. Be sure to select the correct formula parameter from Table 1 for the output and model being adjusted.

$$(R1)/(R3) = \frac{R_o (V_a - 1)}{V_o - V_a} - R_s \quad k\Omega$$

$$R2/R4 = \frac{R_o}{V_a - V_o} - R_s \quad k\Omega$$

Where: V_o = Original output voltage, (V₁ or V₂)
 V_a = Adjusted output voltage
 R_o = The resistance value from Table 1
 R_s = The series resistance from Table 1

Table 1
PT6920 ADJUSTMENT RANGE AND FORMULA PARAMETERS

Output Bus	V ₁ out	V ₂ out	
Series Pt #	PT6921/22	PT6921	PT6922
Adj. Resistor	(R3)/R4	(R1)/R2	(R1)/R2
V _o (nom)	3.3V	2.5V	1.5
V _a (min)	2.3V	1.8V	1.2
V _a (max)	4.2V	3.0V	3.0
R _o (kΩ)	12.1	10.0	9.76
R _s (kΩ)	12.1	11.5	6.49

Figure 1

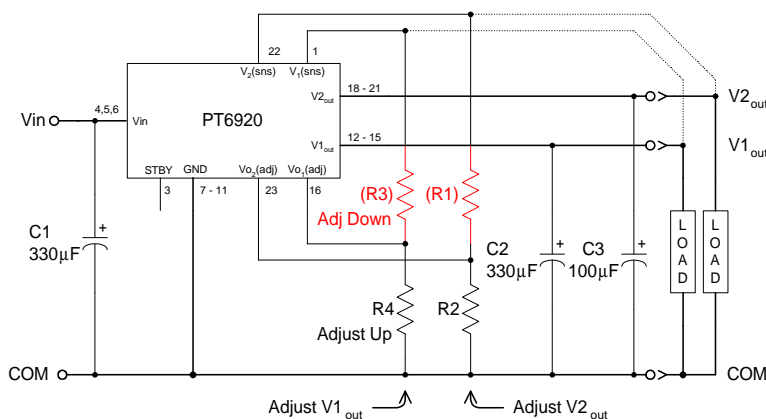


Table 2

PT6920 ADJUSTMENT RESISTOR VALUES

Output Bus Series Pt #	V ₁ out	V ₂ out	
	PT6921/22	PT6921	PT6922
Adj Resistor	(R3)/R4	(R1)/R2	(R1)/R2
V _o (nom)	3.3Vdc	2.5Vdc	1.5Vdc
V _a (req'd)			
1.2			(0.0)kΩ
1.25			(3.3)kΩ
1.3			(8.2)kΩ
1.35			(16.3)kΩ
1.4			(32.6)kΩ
1.45			(81.4)kΩ
1.5			
1.55			189.0kΩ
1.6			91.1kΩ
1.65			58.6kΩ
1.7			42.3kΩ
1.75			32.6kΩ
1.8		(0.0)kΩ	26.0kΩ
1.85		(1.6)kΩ	21.4kΩ
1.9		(3.5)kΩ	17.9kΩ
1.95		(5.8)kΩ	15.2kΩ
2.0		(8.5)kΩ	13.0kΩ
2.05		(11.8)kΩ	11.3kΩ
2.1		(16.0)kΩ	9.8kΩ
2.15		(21.4)kΩ	8.5kΩ
2.2		(28.5)kΩ	7.5kΩ
2.25		(38.5)kΩ	6.5kΩ
2.3	(3.6)kΩ	(53.5)kΩ	5.7kΩ
2.35	(5.1)kΩ	(78.5)kΩ	5.0kΩ
2.4	(6.7)kΩ	(129.0)kΩ	4.4kΩ
2.45	(8.5)kΩ	(279.0)kΩ	3.8kΩ
2.5	(10.6)kΩ		3.3kΩ
2.55	(12.9)kΩ	189.0kΩ	2.8kΩ
2.6	(15.6)kΩ	88.5kΩ	2.4kΩ
2.65	(18.6)kΩ	55.2kΩ	2.0kΩ
2.7	(22.2)kΩ	38.5kΩ	1.6kΩ
2.75	(26.4)kΩ	28.5kΩ	1.3kΩ
2.8	(31.5)kΩ	21.8kΩ	1.0kΩ
2.85	(37.6)kΩ	17.1kΩ	0.7kΩ
2.9	(45.4)kΩ	13.5kΩ	0.5kΩ
2.95	(55.3)kΩ	10.7kΩ	0.2kΩ
3.0	(68.6)kΩ	8.5kΩ	0.0kΩ
3.05	(87.1)kΩ		
3.1	(115.0)kΩ		
3.15	(161.0)kΩ		
3.2	(254.0)kΩ		
3.25	(532.0)kΩ		
3.3			
3.4	109.0kΩ		
3.5	48.4kΩ		
3.6	28.2kΩ		
3.7	18.2kΩ		
3.8	12.1kΩ		
3.9	8.1kΩ		
4.0	5.2kΩ		
4.1	3.0kΩ		
4.2	1.3kΩ		

R1/R3 = (Red) R2/R4 = Black

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.