

For assistance or to order, call **(800) 531-5782**

PT6700 Series

**13 AMP PROGRAMMABLE
INTEGRATED SWITCHING REGULATOR**

Revised 9/13/99

New Space-Saving Package



Patent pending on package assembly




The PT6700 is a new series of high-performance, 13 Amp Integrated Switching Regulators (ISRs) housed in a unique, space-saving 23-pin SIP package. The 13A capability allows easy integration of the latest high-speed, low-voltage μ Ps and bus drivers into existing 5V systems.

The output voltage of the PT6700 can be programmed easily from 1.3V to 3.5V with a 5-bit input compatible

with Intel's Pentium® II Processor.

The PT6700 includes a differential remote sense which automatically compensates for any voltage drop from the ISR to the load. Also provided are internal short circuit protection, OVP drive and a power good output signal. When over-voltage is detected, the PT6700 provides drive for an external crowbar or other protection circuitry.

Standard Application

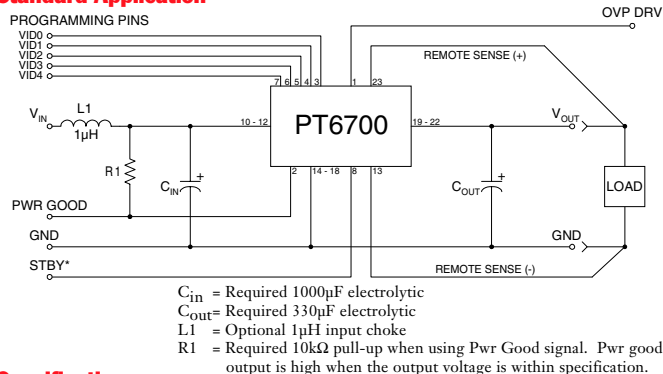

Pin-Out Information

Pin	Function	Pin	Function
1	OVP Drive	13	Remote Sense Gnd
2	Pwr Good	14	GND
3	VID0	15	GND
4	VID1	16	GND
5	VID2	17	GND
6	VID3	18	GND
7	VID4	19	V _{OUT}
8	STBY*	20	V _{OUT}
9	Do not connect	21	V _{OUT}
10	V _{in}	22	V _{OUT}
11	V _{in}	23	Remote Sense V _{OUT}
12	V _{in}		

For STBY* pin
 open = output enabled
 ground = output disabled.

Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT6700 SERIES			Units	
			Min	Typ	Max		
Output Current	I _o	T _a = +60°C, 200 LFM, pkg N T _a = +25°C, natural convection	0.1* 0.1*	—	13 13	A A	
Input Voltage Range	V _{in}	0.1A ≤ I _o ≤ 13A	4.5	—	5.5	V	
Output Voltage Tolerance	ΔV _o	V _{in} = +5V, I _o = 13A -40°C ≤ T _a ≤ +65°C	V _o -0.03	—	V _o +0.03	V	
Line Regulation	Reg _{line}	4.5V ≤ V _{in} ≤ 5.5V, I _o = 13A	—	±10	—	mV	
Load Regulation	Reg _{load}	V _{in} = +5V, 0.1 ≤ I _o ≤ 13A	—	±20	—	mV	
V _o Ripple/Noise	V _n	V _{in} = +5V, I _o = 13A	—	50	—	mV	
Transient Response with C _{out} = 330 μ F	t _{tr} V _{os}	I _o step between 6A and 12A V _o over/undershoot	—	70	—	μ Sec	
			—	100	—	mV	
Efficiency	η	V _{in} = +5V, I _o = 8A	V _o = 3.3V	—	91	—	%
			V _o = 2.9V	—	90	—	%
			V _o = 2.5V	—	89	—	%
			V _o = 1.8V	—	85	—	%
			V _o = 1.5V	—	83	—	%
Switching Frequency	f _o	4.5V ≤ V _{in} ≤ 5.5V 0.1A ≤ I _o ≤ 12.5A	300	350	400	kHz	
Absolute Maximum Operating Temperature Range	T _a	—	-40	—	+85	°C	
Recommended Operating Temperature Range	T _a	Forced Air Flow = 200 LFM Over V _{in} and I _o Ranges	-40	—	+65	°C	
Storage Temperature	T _s	—	-40	—	+125	°C	
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	TBD	—	G's	
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	TBD	—	G's	
Weight	—	—	—	26	—	grams	

* ISR will operate down to no load with reduced specifications.

Output Capacitors: The PT6700 series requires a minimum output capacitance of 330 μ F. The maximum allowable output capacitance is 15,000 μ F.

Input Filter: An input filter is optional for most applications. The input inductor must be sized to handle 12.5ADC with a typical value of 1 μ H. The input capacitance must be rated for a minimum of 1.6Arms of ripple current. For transient or dynamic load applications, additional capacitance may be required.

PT6700 Series

Features

- Space Saving SIP Package
- +5V input
- 5-bit Programmable:
1.3V to 3.5V@13A
- High Efficiency
- Input Voltage Range:
4.5V to 5.5V
- Differential Remote Sense
- Short Circuit Protection
- Over-Voltage Drive
- Power Good Signal

Ordering Information

PT6701□ = 1.3 to 3.5 Volts

(For dimensions and PC board layout, see Package Styles 1300 and 1310.)

PT Series Suffix (PT1234X)

Case/Pin Configuration

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

Programming Information

VID3	VID2	VID1	VID0	VID4=1 Vout	VID4=0 Vout
1	1	1	1	2.0V	1.30V
1	1	1	0	2.1V	1.35V
1	1	0	1	2.2V	1.40V
1	1	0	0	2.3V	1.45V
1	0	1	1	2.4V	1.50V
1	0	1	0	2.5V	1.55V
1	0	0	1	2.6V	1.60V
1	0	0	0	2.7V	1.65V
0	1	1	1	2.8V	1.70V
0	1	1	0	2.9V	1.75V
0	1	0	1	3.0V	1.80V
0	1	0	0	3.1V	1.85V
0	0	1	1	3.2V	1.90V
0	0	1	0	3.3V	1.95V
0	0	0	1	3.4V	2.00V
0	0	0	0	3.5V	2.05V

Logic 0 = Pin 13 potential (remote sense gnd)

Logic 1 = Open circuit (no pull-up resistors)

VID3 and VID4 may not be changed while the unit is operating.


PT6700 Product Family

	Input Voltage	Vout Adjust	OVP/ Pwr Good	Requires +12V Bias
PT6701	5V	VID	✓	
PT6702	3.3V	VID	✓	
PT6705	5V	Resistor		✓
PT6715	5V	Resistor		
PT6721	12V	VID	✓	
PT6725	12V	Resistor		


CHARACTERISTIC DATA

PT6701, Vin = 5.0V

Safe Operating Area, Vout = 3.3V

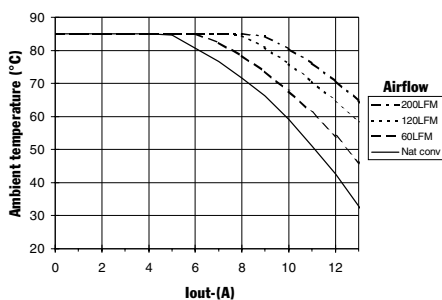


Power Dissipation vs Output Current

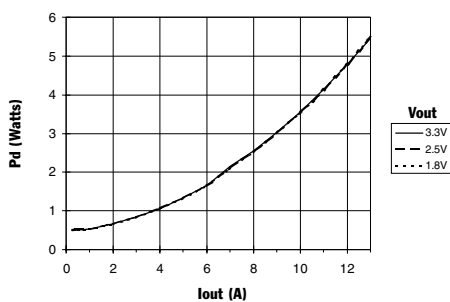


PT6701, Vin = 5.0V (Typical performance at Ta = 25°C)

Efficiency vs Output Current

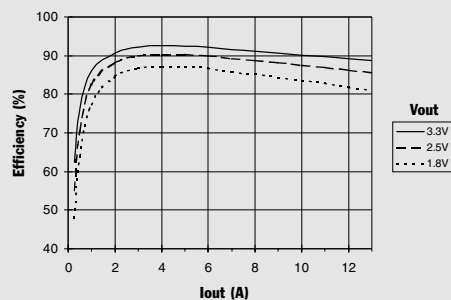

Ripple vs Output Current

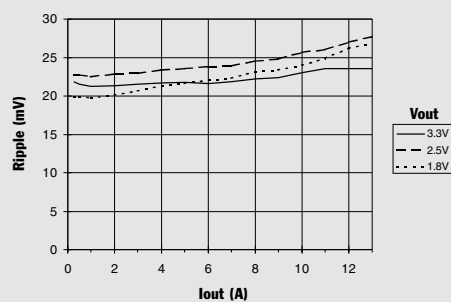

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.