


# PT6650 Series

## 5 AMP 24V INPUT INTEGRATED SWITCHING REGULATOR

[Application Notes](#)  
[Mechanical Outline](#)  
[Product Selector Guide](#)

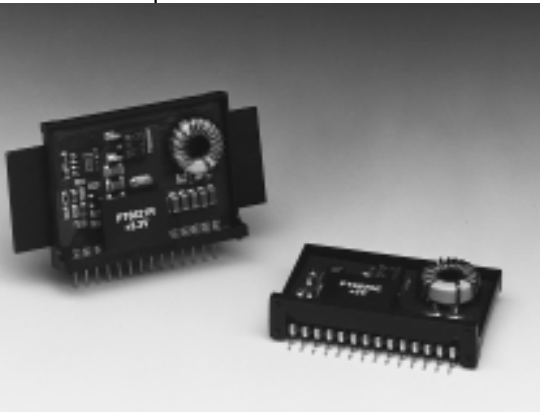


- Single Device: 5A Output
- Input Voltage Range: 9V to 28V
- Adjustable Output Voltage
- 80% Efficiency
- Remote Sense Capability
- Standby Function

(ISRs). Designed for general purpose industrial applications requiring as much as 5A of output current, the PT6650 is packaged in a 14-Pin SIP (Single In-line Package) and is available in a surface-mount configuration.

The PT6650 series is a new addition to Power Trends' line of 24V bus Integrated Switching Regulators

Only two external capacitors are required for proper operation. Please note that this product does not include short circuit protection.

### Standard Application

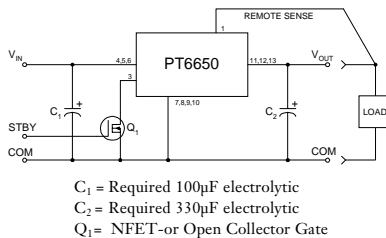

### Pin-Out Information


1	Remote Sense
2	Do Not Connect
3	STBY*- Standby
4	$V_{in}$
5	$V_{in}$
6	$V_{in}$
7	GND
8	GND
9	GND
10	GND
11	$V_{out}$
12	$V_{out}$
13	$V_{out}$
14	$V_{out}$ Adjust

### Ordering Information

PT6651□	= +3.3 Volts
PT6652□	= +2.5 Volts
PT6653□	= +5.0 Volts
PT6654□	= +9.0 Volts
PT6655□	= +15.0 Volts
PT6656□	= +12.0 Volts

### PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Spreader	Heat Spreader with Side Tabs
Vertical Through-Hole	<b>P</b>	<b>R</b>
Horizontal Through-Hole	<b>D</b>	<b>G</b>
Horizontal Surface Mount	<b>E</b>	<b>B</b>



Note: Back surface of product is conducting metal

### Specifications

Characteristics ( $T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6650 SERIES			Units	
			Min	Typ	Max		
Output Current	$I_o$	$T_a = 60^\circ\text{C}$ , 200 LFM, pkg P $T_a = 25^\circ\text{C}$ , natural convection	0.1* 0.1*	—	5.0** 5.0**	A A	
Input Voltage Range	$V_{in}$	$0.1\text{A} \leq I_o \leq 5.0\text{A}$	$V_o \leq +6\text{V}$ $V_o > +6\text{V}$	+9V $V_o+3$	+28V +28V	V V	
Output Voltage Tolerance	$\Delta V_o$	Over $V_{in}$ range $T_a = -40^\circ\text{C}$ to $+65^\circ\text{C}$	$V_o-0.1$	—	$V_o+0.1$	V	
Output Voltage Adjust Range	$V_{oadj}$	Pin 14 to $V_o$ or ground	$V_o = +3.3\text{V}$ $V_o = +2.5\text{V}$ $V_o = +5.0\text{V}$ $V_o = +9.0\text{V}$ $V_o = +12\text{V}$ $V_o = +15\text{V}$	2.2 1.8 3.0 6.0 9.0 10.0	— — — — — —	4.7 4.3 6.5 10.2 13.6 17.0	V
Line Regulation	$Reg_{line}$	$+9\text{V} \leq V_{in} \leq +28\text{V}$ , $I_o = 5.0\text{A}$	—	$\pm 0.5$	$\pm 1.0$	% $V_o$	
Load Regulation	$Reg_{load}$	$V_{in} = +24\text{V}$ , $0.1 \leq I_o \leq 5.0\text{A}$	—	$\pm 0.5$	$\pm 1.0$	% $V_o$	
$V_o$ Ripple/Noise	$V_n$	$V_{in} = +24\text{V}$ , $I_o = 5.0\text{A}$	$V_o \leq +6\text{V}$ $V_o > +6\text{V}$	— 50 1.0	—	mVpp % $V_o$	
Transient Response with $C_2 = 330\mu\text{F}$	$t_{tr}$ $V_{os}$	$I_o$ step between 2.5A and 5.0A $V_o$ over/undershoot	— —	100 100	— —	$\mu\text{Sec}$ mV	
Efficiency	$\eta$	$V_{in} = +24\text{V}$ , $I_o = 0.5x I_{o,max}$  $V_{in} = +24\text{V}$ , $I_o = I_{o,max}$	$V_o = +3.3\text{V}$ $V_o = +2.5\text{V}$ $V_o = +5.0\text{V}$  $V_o = +3.3\text{V}$ $V_o = +2.5\text{V}$ $V_o = +5.0\text{V}$	— — — — 80 75 84	81 76 85 — — —	% % % % % %	
Switching Frequency	$f_o$	$9\text{V} \leq V_{in} \leq 28\text{V}$ Over $I_o$ range	500	550	600	kHz	
Recommended Operating Temperature Range	$T_a$	Free Air Convection (40-60 LFM) Over $V_{in}$ and $I_o$ ranges with heat tab	-40	—	+65	$^\circ\text{C}$	
Storage Temperature	$T_s$	—	-40	—	+125	$^\circ\text{C}$	
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's	
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	—	7.5	—	G's	
Weight	—	—	—	14	—	grams	




\* ISR will operate down to no load with reduced specifications. \*\* See SOA curves.

Note: The PT6650 Series requires a 330µF(output) and 100µF(input) electrolytic capacitors for proper operation in all applications.




**CHARACTERISTIC DATA**

**PT6650 Series**

**PT6650 Series @Vin=+24V**

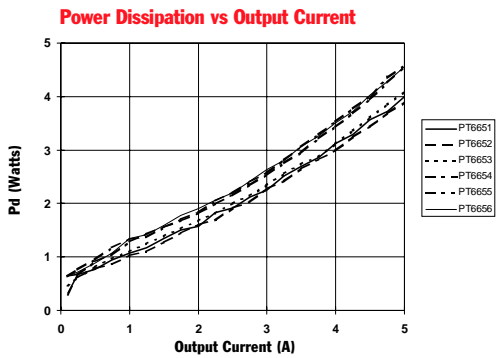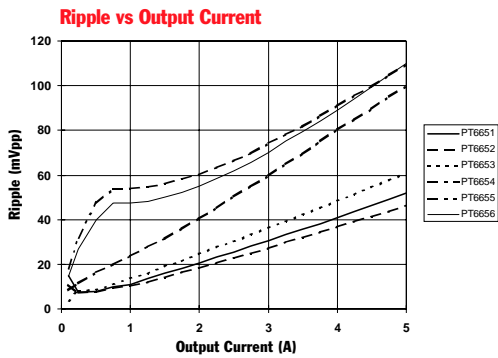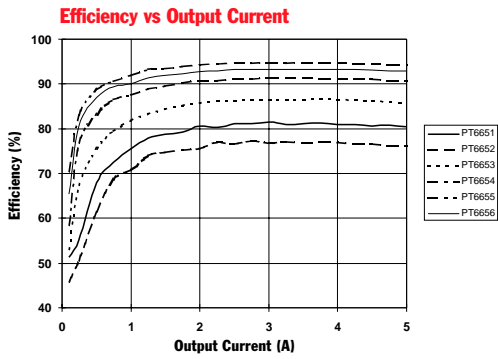

**Safe Operating Area Curves @Vin=+24V**

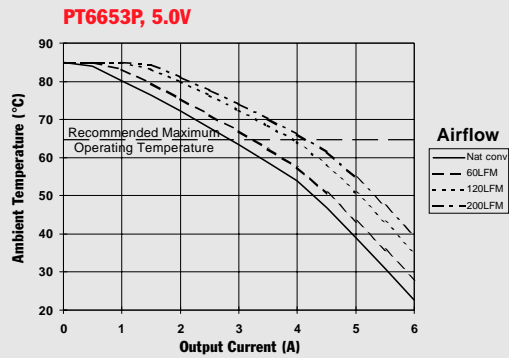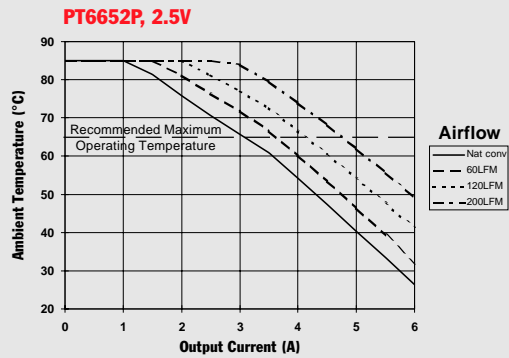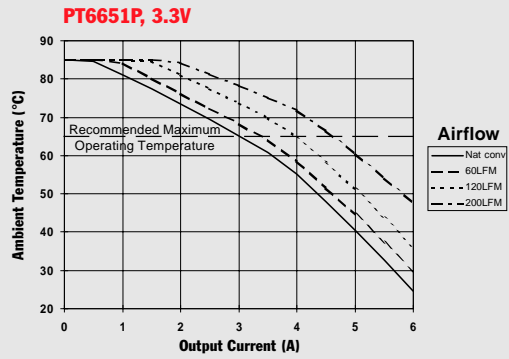

**Application Notes** **PT6650 Series**

[More Application Notes](#)

**Adjusting the Output Voltage of the PT6650 5Amp 24V Bus Converter Series**

The output voltage of the Power Trends PT6650 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as  $V_a$  (min) and  $V_a$  (max).

**Adjust Up:** An increase in the output voltage is obtained by adding a resistor R2, between pin 14 ( $V_o$  adjust) and pins 7-10 (GND).


**Adjust Down:** Add a resistor (R1), between pin 14 ( $V_o$  adjust) and pins 11-13 ( $V_o$ ).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor, either (R1) or R2 as appropriate.

**Notes:**

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from  $V_o$  adjust to either GND,  $V_{out}$ , or the Remote Sense pin. Any capacitance added to the  $V_o$  adjust pin will affect the stability of the ISR.
3. If the Remote Sense feature is being used, connecting the resistor (R1) between pin 14 ( $V_o$  adjust) and pin 1 (Remote Sense) can benefit load regulation.
4. The minimum input voltage required by the part is  $V_{out} + 3$ , or 9V, whichever is higher.
5. For output voltages above 12.5Vdc, the maximum output current must be limited to 4A dc.

**Figure 1**

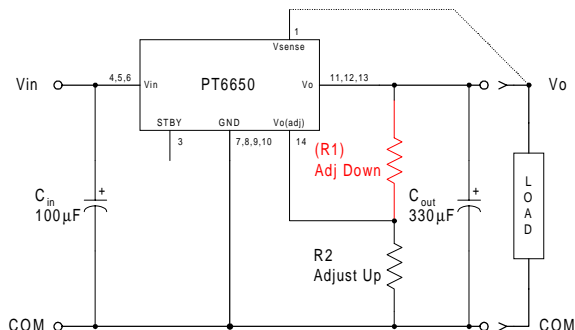

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulae.

$$(R1) = \frac{R_o (V_o - 1.25)(V_a - 1.25)}{1.25 (V_o - V_a)} - R_s \quad \text{k}\Omega$$

$$R2 = \frac{R_o (V_o - 1.25)}{V_a - V_o} - R_s \quad \text{k}\Omega$$

Where:  $V_o$  = Original output voltage  
 $V_a$  = Adjusted output voltage  
 $R_o$  = The resistance value in Table 1  
 $R_s$  = The series resistance from Table 1

**Table 1**  
**PT6650 ADJUSTMENT AND FORMULA PARAMETERS**

Series Pt #	PT6652	PT6651	PT6653	PT6654	PT6656	PT6655
<b><math>V_o</math> (nom)</b>	2.5V	3.3V	5.0V	9.0V	12.0V	15.0V
<b><math>V_a</math> (min)</b>	1.8V	2.2V	3.0V	6.0V	9.0V	10.0V
<b><math>V_a</math> (max)</b>	4.3V	4.7V	6.5V	10.2V	13.6V	17.0V
<b><math>R_o</math> (kΩ)</b>	4.99	4.22	2.49	2.0	2.0	2.0
<b><math>R_s</math> (kΩ)</b>	2.49	4.99	4.99	12.7	12.7	12.7

For assistance or to order, call **(800) 531-5782**

**PT6650 Series**

**Application**

**Notes**

**Table 2**

**PT6650 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6652	PT6651	PT6653	Series Pt #	PT6654	PT6656	PT6655
Current	5Adc	5Adc	5Adc	Current	5Adc	5Adc	4Adc
V <sub>o</sub> (nom)	2.5Vdc	3.3Vdc	5.0Vdc	V <sub>o</sub> (nom)	9.0Vdc	12.0Vdc	15.0Vdc
V <sub>a</sub> (req'd)				V <sub>a</sub> (req'd)			
1.8	(1.4)kΩ			6.0	(6.9)kΩ		
1.9	(2.9)kΩ			6.2	(9.2)kΩ		
2.0	(5.0)kΩ			6.4	(11.9)kΩ		
2.1	(8.1)kΩ			6.6	(14.0)kΩ		
2.2	(13.3)kΩ	(1.0)kΩ		6.8	(18.6)kΩ		
2.3	(23.7)kΩ	(2.3)kΩ		7.0	(23.0)kΩ		
2.4	(54.9)kΩ	(3.9)kΩ		7.2	(28.3)kΩ		
2.5		(5.8)kΩ		7.4	(35.0)kΩ		
2.6	59.9kΩ	(8.4)kΩ		7.6	(43.5)kΩ		
2.7	28.7kΩ	(11.7)kΩ		7.8	(55.0)kΩ		
2.8	18.3kΩ	(16.5)kΩ		8.0	(71.0)kΩ		
2.9	13.1kΩ	(23.6)kΩ		8.2	(95.0)kΩ		
3.0	10.0kΩ	(35.4)kΩ	(1.6)kΩ	8.4	(135.0)kΩ		
3.1	7.9kΩ	(59.0)kΩ	(2.3)kΩ	8.6	(215.0)kΩ		
3.2	6.4kΩ	(130.0)kΩ	(3.1)kΩ	8.8	(455.0)kΩ		
3.3	5.3kΩ		(4.0)kΩ	9.0		(31.7)kΩ	
3.4	4.4kΩ	81.5kΩ	(5.1)kΩ	9.2	64.8kΩ	(36.1)kΩ	
3.5	3.8kΩ	38.3kΩ	(6.2)kΩ	9.4	26.1kΩ	(41.2)kΩ	
3.6	3.2kΩ	23.8kΩ	(7.6)kΩ	9.6	13.1kΩ	(47.1)kΩ	
3.7	2.7kΩ	16.6kΩ	(9.1)kΩ	9.8	6.7kΩ	(54.1)kΩ	
3.8	2.3kΩ	12.3kΩ	(10.9)kΩ	10.0	2.8kΩ	(62.6)kΩ	(25.8)kΩ
3.9	2.0kΩ	9.4kΩ	(13.0)kΩ	10.2	0.2kΩ	(72.8)kΩ	(28.3)kΩ
4.0	1.7kΩ	7.4kΩ	(15.6)kΩ	10.4		(85.7)kΩ	(31.1)kΩ
4.1	1.4kΩ	5.8kΩ	(18.7)kΩ	10.6		(102.0)kΩ	(34.1)kΩ
4.2	1.2kΩ	4.6kΩ	(22.6)kΩ	10.8		(124.0)kΩ	(37.3)kΩ
4.3	1.0kΩ	3.7kΩ	(27.6)kΩ	11.0		(155.0)kΩ	(40.9)kΩ
4.4		2.9kΩ	(34.2)kΩ	11.2		(201.0)kΩ	(44.9)kΩ
4.5		2.2kΩ	(43.6)kΩ	11.4		(278.0)kΩ	(49.3)kΩ
4.6		1.7kΩ	(57.6)kΩ	11.6		(432.0)kΩ	(54.3)kΩ
4.7		1.2kΩ	(80.9)kΩ	11.8		(895.0)kΩ	(59.8)kΩ
4.8			(128.0)kΩ	12.0			(66.1)kΩ
4.9			(268.0)kΩ	12.2		94.8kΩ	(73.3)kΩ
5.0				12.4		41.1kΩ	(81.6)kΩ
5.1			88.4kΩ	12.6		23.1kΩ	(91.3)kΩ
5.2			41.7kΩ	12.8		14.2kΩ	(103.0)kΩ
5.3			26.1kΩ	13.0		8.8kΩ	(117.0)kΩ
5.4			18.4kΩ	13.2		5.2kΩ	(133.0)kΩ
5.5			13.7kΩ	13.4		2.7kΩ	(154.0)kΩ
5.6			10.6kΩ	13.6		0.7kΩ	(181.0)kΩ
5.7			8.4kΩ	13.8			(217.0)kΩ
5.8			6.7kΩ	14.0			(268.0)kΩ
5.9			5.4kΩ	14.2			(343.0)kΩ
6.0			4.4kΩ	14.5			(570.0)kΩ
6.1			3.5kΩ	15.0			
6.2			2.8kΩ	15.5			42.3kΩ
6.3			2.2kΩ	16.0			14.8kΩ
6.4			1.7kΩ	16.5			5.6kΩ
6.5			1.2kΩ	17.0			1.1kΩ

R1 = (Red) R2 = Black

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.