

# PT6600 Series

## 9 AMP ADJUSTABLE INTEGRATED SWITCHING REGULATOR

[Application Notes](#)  
[Mechanical Outline](#)  
[Product Selector Guide](#)

- Single Device 9A Output
- Input Voltage Range: 3.1V to 6.0V
- Adjustable Output Voltage
- 90% Efficiency
- Remote Sense Capability
- Standby Function
- Over-Temperature Protection

performance family of 14-Pin SIP (Single In-line Package) Integrated Switching Regulators (ISRs), designed for stand alone operation in applications requiring as much as 9A of output current (10A with a side heat tab).

Only two external capacitors are required for proper operation. Please note that this product does not include short circuit protection.

The PT6600 series is a new addition to the Power Trends' high

### Pin-Out Information

Pin	Function
1	Remote Sense
2	Do not connect
3	STBY*-Standby
4	V <sub>in</sub>
5	V <sub>in</sub>
6	V <sub>in</sub>
7	GND
8	GND
9	GND
10	GND
11	V <sub>out</sub>
12	V <sub>out</sub>
13	V <sub>out</sub>
14	V <sub>out</sub> Adjust


### Ordering Information

- PT6601□ = +3.3 Volts
  - †PT6602□ = +1.5 Volts
  - PT6603□ = +2.5 Volts
  - PT6604□ = +3.6 Volts
  - †PT6605□ = +1.2 Volts
  - †PT6606□ = +1.8 Volts
- †3.3V Input Bus Capable


### PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Spreader	Heat Spreader with Side Tabs
Vertical Through-Hole	<b>P</b>	<b>R</b>
Horizontal Through-Hole	<b>D</b>	<b>G</b>
Horizontal Surface Mount	<b>E</b>	<b>B</b>

### Standard Application

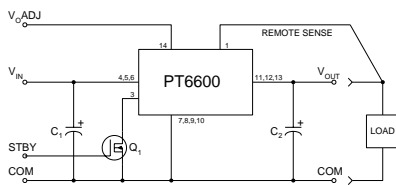

C<sub>1</sub> = Required 330µF electrolytic  
 C<sub>2</sub> = Required 330µF electrolytic  
 Q<sub>1</sub> = NFBT-or Open Collector Gate



Note: Back surface of product is conducting metal.

### Specifications

Characteristics (T <sub>a</sub> = 25°C unless noted)	Symbols	Conditions	PT6600 SERIES			Units
			Min	Typ	Max	
Output Current	I <sub>o</sub>	T <sub>a</sub> = 60°C, 200 LFM, pkg P T <sub>a</sub> = 25°C, natural convection	0.1*	—	9.0** 7.0**	A
Input Voltage Range	V <sub>in</sub>	0.1A ≤ I <sub>o</sub> ≤ 8.0A V <sub>o</sub> = +2.5/3.3V V <sub>o</sub> = +1.5V V <sub>o</sub> = +3.6V	4.5 3.1 4.8	—	6.0 6.0 6.0	V
Output Voltage Tolerance	ΔV <sub>o</sub>	V <sub>in</sub> = +5V, I <sub>o</sub> = 8.0A T <sub>a</sub> = 0°C to 65°C	V <sub>o</sub> -0.1	—	V <sub>o</sub> +0.1	V
Output Voltage Adjust Range	V <sub>oadj</sub>	Pin 14 to V <sub>o</sub> or ground V <sub>in</sub> min=+3.1V or V <sub>o</sub> +1.2V (whichever is greater) V <sub>o</sub> = +3.3V V <sub>o</sub> = +1.5V V <sub>o</sub> = +2.5V V <sub>o</sub> = +3.6V	2.25 1.27 1.80 2.50	—	4.20 2.65 3.50 4.30	V
Line Regulation	Reg <sub>line</sub>	4.5V ≤ V <sub>in</sub> ≤ 6.0V, I <sub>o</sub> = 8.0A 3.1V ≤ V <sub>in</sub> ≤ 6.0V, I <sub>o</sub> = 8.0A 4.5V ≤ V <sub>in</sub> ≤ 6.0V, I <sub>o</sub> = 8.0A V <sub>o</sub> = +3.3V V <sub>o</sub> = +1.5V V <sub>o</sub> = +2.5V	—	±7 ±3 ±7	±17 ±8 ±13	mV
Load Regulation	Reg <sub>load</sub>	V <sub>in</sub> = +5V, 0.1 ≤ I <sub>o</sub> ≤ 8.0A V <sub>o</sub> = +3.3V V <sub>o</sub> = +1.5V V <sub>o</sub> = +2.5V	—	±17 ±12 ±13	±33 ±23 ±25	mV
V <sub>o</sub> Ripple/Noise	V <sub>n</sub>	V <sub>in</sub> = 5V, I <sub>o</sub> = 8.0A	—	50	—	mVpp
Transient Response with C <sub>2</sub> = 330µF	t <sub>tr</sub> V <sub>os</sub>	I <sub>o</sub> step between 4.0A and 8.0A V <sub>o</sub> over/undershoot	—	100 150	—	µSec mV
Efficiency	η	V <sub>in</sub> = +5V, I <sub>o</sub> = 3.0A V <sub>in</sub> = +5V, I <sub>o</sub> = 8.0A V <sub>o</sub> = +3.3/3.6V V <sub>o</sub> = +1.5V V <sub>o</sub> = +2.5V V <sub>o</sub> = +3.3/3.6V V <sub>o</sub> = +1.5V V <sub>o</sub> = +2.5V	—	90 76 85 83 68 76	—	% % % % % %

\* ISR will operate down to no load with reduced specifications.

\*\* See SOA curves

**Note:** The PT6600 Series requires two 330µF electrolytic capacitors (input and output) for proper operation in all applications.  
 See PT6000/7000 Series Capacitor application note.

# PT6600 Series

## Specifications (continued)




Characteristics ( $T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6600 SERIES			Units
			Min	Typ	Max	
Switching Frequency	$f_o$	$3.1\text{V} \leq V_{in} \leq 6.0\text{V}$ $0.1\text{A} \leq I_o \leq 8.0\text{A}$	475	600	725	kHz
Absolute Maximum Operating Temperature Range	$T_a$		0	—	+85	$^\circ\text{C}$
Recommended Operating Temperature Range	$T_a$	Free Air Convection (40-60 LFM) Over $V_{in}$ and $I_o$ ranges with heat tab	0	—	65**	$^\circ\text{C}$
Thermal Resistance	$\theta_{ja}$	Free Air Convection (40-60 LFM)	—	25	—	$^\circ\text{C}/\text{W}$
Storage Temperature	$T_s$	—	-40	—	+125	$^\circ\text{C}$
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	—	7.5	—	G's
Weight	—	—	—	14	—	grams

\*\* See SOA curves




**Note:** The PT6600 Series requires two 330 $\mu\text{F}$  electrolytic capacitors (input and output) for proper operation in all applications.

## CHARACTERISTIC DATA

### Safe Operating Area Curves (@ $V_{in}=+5.0\text{V}$ ) (See Note 2)

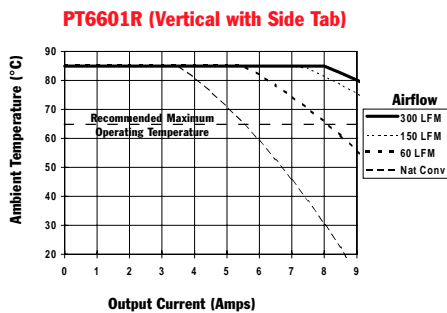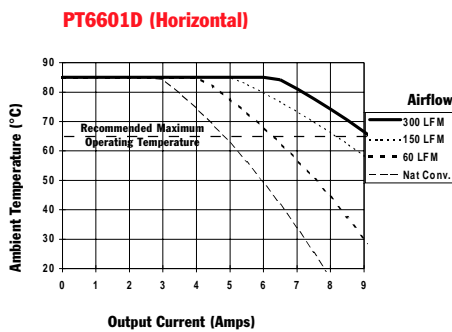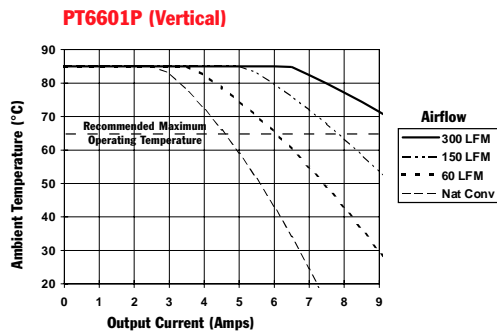

### PT6601, 3.3 VDC (See Note 1)

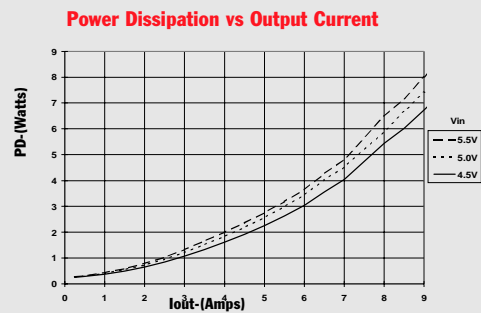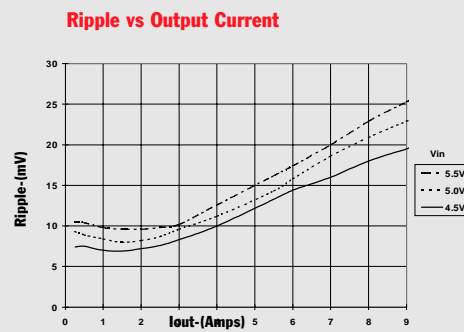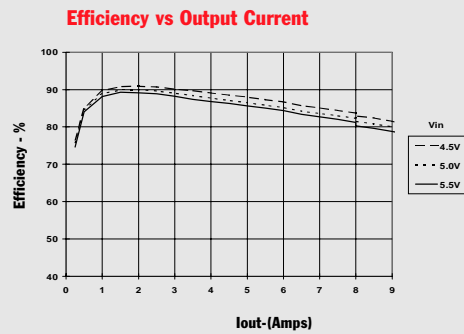

**Note 1:** All data listed in the above graphs has been developed from actual products tested at 25 $^\circ\text{C}$ . This data is considered typical data for the ISR.

**Note 2:** SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

**Application Notes** **PT6500/PT6600 Series**

[More Application Notes](#)


**Adjusting the Output Voltage of the PT6500 and PT6600 5V Bus Converters**

The output voltage of the Power Trends PT6500/PT6600 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as  $V_a$  (min) and  $V_a$  (max).

**Adjust Up:** An increase in the output voltage is obtained by adding a resistor R2, between pin 14 ( $V_o$  adjust) and pins 7-10 (GND).

**Adjust Down:** Add a resistor (R1), between pin 14 ( $V_o$  adjust) and pins 11-13 ( $V_o$ ).

**Figure 1**

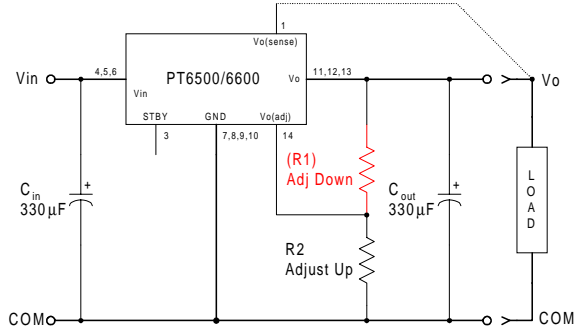

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor, either (R1) or R2 as appropriate.

**Notes:**

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from  $V_o$  adjust to either GND,  $V_{out}$ , or the Remote Sense pin. Any capacitance added to the  $V_o$  adjust pin will affect the stability of the ISR.
3. If the Remote Sense feature is being used, connecting the resistor (R1) between pin 14 ( $V_o$  adjust) and pin 1 (Remote Sense) can benefit load regulation.
4. The minimum input voltage required by the part is  $V_{out} + 1.2$  or  $3.1V$ , whichever is higher.

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulae.

$$(R1) = \frac{R_o (V_a - 1.0)}{(V_o - V_a)} - R_s \quad k\Omega$$

$$R2 = \frac{R_o}{V_a - V_o} - R_s \quad k\Omega$$

Where:  $V_o$  = Original output voltage  
 $V_a$  = Adjusted output voltage  
 $R_o$  = The resistance value in Table 1  
 $R_s$  = The series resistance from Table 1

**Table 1**  
**PT6500/6600 ADJUSTMENT AND FORMULA PARAMETERS**

Series Pt #	PT6505	PT6507	PT6502	PT6508	PT6506	PT6503	PT6501	PT6504
	PT6605	PT6607	PT6602	PT6608	PT6606	PT6603	PT6601	PT6604
$V_o$ (nom)	1.2	1.3	1.5	1.7	1.8	2.5	3.3	3.6
$V_a$ (min)	1.14	1.19	1.27	1.36	1.4	1.8	2.25	2.5
$V_a$ (max)	2.35	2.45	2.65	2.85	2.95	3.5	4.2	4.3
$R_o$ (k $\Omega$ )	2.49	2.49	2.49	2.49	2.49	4.99	12.1	10.0
$R_s$ (k $\Omega$ )	2.0	2.0	2.0	2.0	2.0	4.22	12.1	12.1

For assistance or to order, call **(800) 531-5782**

<b>PT6500/PT6600 Series</b>	<b>Application</b>	<b>Notes</b>
-----------------------------	--------------------	--------------

**Table 2**

**PT6500/PT6600 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6505	PT6507	PT6502	PT6508	PT6506	PT6503	PT6501	PT6504	
	PT6605	PT6607	PT6602	PT6608	PT6606	PT6603	PT6601	PT6604	
<b>V<sub>o</sub> (nom)</b>	<b>1.2</b>	<b>1.3</b>	<b>1.5</b>	<b>1.7</b>	<b>1.8</b>	<b>2.5</b>	<b>3.3</b>	<b>3.6</b>	
<b>V<sub>a</sub> (req'd)</b>									
1.15	(5.5)kΩ								
1.2		(3.0)kΩ							
1.25	47.8kΩ	(10.5)kΩ							
1.3	22.9kΩ		(1.7)kΩ						
1.35	14.6kΩ	47.8kΩ	(3.8)kΩ						
1.4	10.5kΩ	22.9kΩ	(8.0)kΩ	(1.3)kΩ	(0.5)kΩ				
1.45	8.0kΩ	14.6kΩ	(20.4)kΩ	(2.5)kΩ	(1.2)kΩ				
1.5	6.3kΩ	10.5kΩ		(4.2)kΩ	(2.2)kΩ				
1.55	5.1kΩ	8.0kΩ	47.8kΩ	(7.1)kΩ	(3.5)kΩ				
1.6	4.2kΩ	6.3kΩ	22.9kΩ	(12.9)kΩ	(5.5)kΩ				
1.65	3.5kΩ	4.1kΩ	14.6kΩ	(30.4)kΩ	(8.8)kΩ				
1.7	3.0kΩ	4.2kΩ	10.5kΩ		(15.4)kΩ				
1.75	2.5kΩ	3.5kΩ	8.0kΩ	47.8kΩ	(35.4)kΩ				
1.8	2.2kΩ	3.0kΩ	6.3kΩ	22.9kΩ		(1.5)kΩ			
1.85	1.8kΩ	2.5kΩ	5.1kΩ	14.6kΩ	47.8kΩ	(2.3)kΩ			
1.9	1.6kΩ	2.2kΩ	4.2kΩ	10.5kΩ	22.9kΩ	(3.3)kΩ			
1.95	1.3kΩ	1.8kΩ	3.5kΩ	8.0kΩ	14.6kΩ	(4.4)kΩ			
2.0	1.1kΩ	1.6kΩ	3.0kΩ	6.3kΩ	10.5kΩ	(5.8)kΩ			
2.05	0.9kΩ	1.3kΩ	2.5kΩ	5.1kΩ	8.0kΩ	(7.4)kΩ			
2.1	0.8kΩ	1.1kΩ	2.2kΩ	4.2kΩ	6.3kΩ	(9.5)kΩ			
2.15	0.6kΩ	0.9kΩ	1.8kΩ	3.5kΩ	5.1kΩ	(12.2)kΩ			
2.2	0.5kΩ	0.8kΩ	1.6kΩ	3.0kΩ	4.2kΩ	(15.7)kΩ			
2.25	0.4kΩ	0.6kΩ	1.3kΩ	2.5kΩ	3.5kΩ	(20.7)kΩ	(2.3)kΩ		
2.3	0.3kΩ	0.5kΩ	1.1kΩ	2.2kΩ	3.0kΩ	(28.2)kΩ	(3.6)kΩ		
2.35	0.2kΩ	0.4kΩ	0.9kΩ	1.8kΩ	2.5kΩ	(40.7)kΩ	(5.1)kΩ		
2.4		0.3kΩ	0.8kΩ	1.6kΩ	2.2kΩ	(65.6)kΩ	(6.7)kΩ		
2.45		0.2kΩ	0.6kΩ	1.3kΩ	1.8kΩ	(140.0)kΩ	(8.5)kΩ		
2.5			0.5kΩ	1.1kΩ	1.6kΩ		(10.6)kΩ	(1.5)kΩ	
2.55			0.4kΩ	0.9kΩ	1.3kΩ	95.6kΩ	(12.9)kΩ	(2.7)kΩ	
2.6			0.3kΩ	0.8kΩ	1.1kΩ	45.7kΩ	(15.6)kΩ	(3.9)kΩ	
2.65			0.2kΩ	0.6kΩ	0.9kΩ	29.0kΩ	(18.6)kΩ	(5.3)kΩ	
2.7				0.5kΩ	0.8kΩ	20.7kΩ	(22.2)kΩ	(6.8)kΩ	
2.75				0.4kΩ	0.6kΩ	15.7kΩ	(26.4)kΩ	(8.5)kΩ	
2.8				0.3kΩ	0.5kΩ	12.4kΩ	(31.5)kΩ	(10.4)kΩ	
2.85				0.2kΩ	0.4kΩ	10.0kΩ	(37.6)kΩ	(12.6)kΩ	
2.9					0.3kΩ	8.3kΩ	(45.4)kΩ	(15.0)kΩ	
2.95					0.2kΩ	0.9kΩ	(55.3)kΩ	(17.9)kΩ	
3.0						5.8kΩ	(68.6)kΩ	(21.2)kΩ	
3.1						4.1kΩ	(115.0)kΩ	(29.9)kΩ	
3.2						2.9kΩ	(254.0)kΩ	(42.9)kΩ	
3.3						2.0kΩ		(64.6)kΩ	
3.4						1.3kΩ	109.0kΩ	(108.0)kΩ	
3.5						0.8kΩ	48.4kΩ	(238.0)kΩ	
3.6							28.2kΩ		
3.7							18.2kΩ	87.9kΩ	
3.8							12.1kΩ	37.9kΩ	
3.9	4/. V <sub>out</sub> >3.8Vdc requires V <sub>in</sub> >5.0Vdc !							8.1kΩ	21.2kΩ
4.0							5.2kΩ	12.9kΩ	
4.1							3.0kΩ	7.9kΩ	
4.2							1.3kΩ	4.6kΩ	
4.3								2.2kΩ	

R1 = (Red) R2 = Black

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.