

LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

- Direct Replacements for PMI and LTC OP27 and OP37 Series

Features of OP27A, OP27C, OP37A, and OP37C:

- Maximum Equivalent Input Noise Voltage:
3.8 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
5.5 nV/ $\sqrt{\text{Hz}}$ at 10 kHz
- Very Low Peak-to-Peak Noise Voltage at
0.1 Hz to 10 Hz ... 80 nV Typ
- Low Input Offset Voltage ... 25 μV Max
- High Voltage Amplification ... 1 V/ μV Min

Feature of OP37 Series:

- Minimum Slew Rate ... 11 V/ μs

description


The OP27 and OP37 operational amplifiers combine outstanding noise performance with excellent precision and high-speed specifications. The wideband noise is only 3 nV/ $\sqrt{\text{Hz}}$ and with the 1/f noise corner at 2.7 Hz, low noise is maintained for all low-frequency applications.

The outstanding characteristics of the OP27 and OP37 make these devices excellent choices for low-noise amplifier applications requiring precision performance and reliability. Additionally, the OP37 is free of latch-up in high-gain, large-capacitive-feedback configurations.


The OP27 series is compensated for unity gain. The OP37 series is decompensated for increased bandwidth and slew rate and is stable down to a gain of 5.

The OP27A, OP27C, OP37A, and OP37C are characterized for operation over the full military temperature range of -55°C to 125°C . The OP27E, OP27G, OP37E, and OP37G are characterized for operation from -25°C to 85°C .

JG OR P PACKAGE
(TOP VIEW)

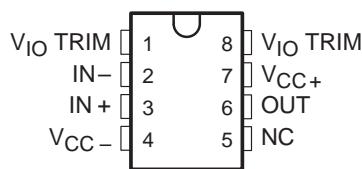


FK PACKAGE
(TOP VIEW)

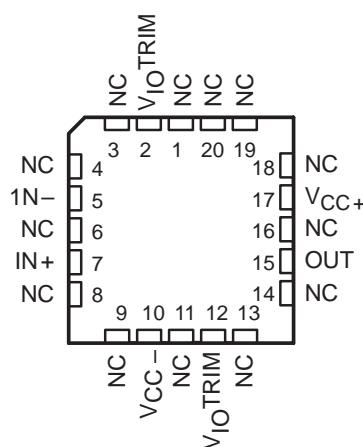

NC – No internal connection

symbol

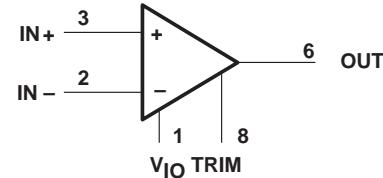

Pin numbers are for the JG and P packages.

AVAILABLE OPTIONS

| TA | V _{IO} _{max} AT 25°C | STABLE GAIN | PACKAGE | | |
|----------------|---|----------------|---------------------|----------------------|--------------------|
| | | | CERAMIC DIP (JG) | CHIP CARRIER (FK) | PLASTIC DIP (P) |
| -25°C to 85°C | 25 μV | 1 | — | — | OP27EP |
| | 5 | — | — | — | OP37EP |
| | 100 μV | 1 | — | — | OP27GP |
| | 5 | — | — | — | OP37GP |
| -55°C to 125°C | 25 μV | 1 | OP27AJG | OP27AFK | — |
| | 5 | — | OP37AJG | OP37AFK | — |
| | 100 μV | 1 | OP27CJG | — | — |
| | 5 | — | OP37CJG | — | — |

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1994, Texas Instruments Incorporated




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED OPERATIONAL AMPLIFIER

SLOS100B - FEBRUARY 1989 - REVISED AUGUST 1994

schematic

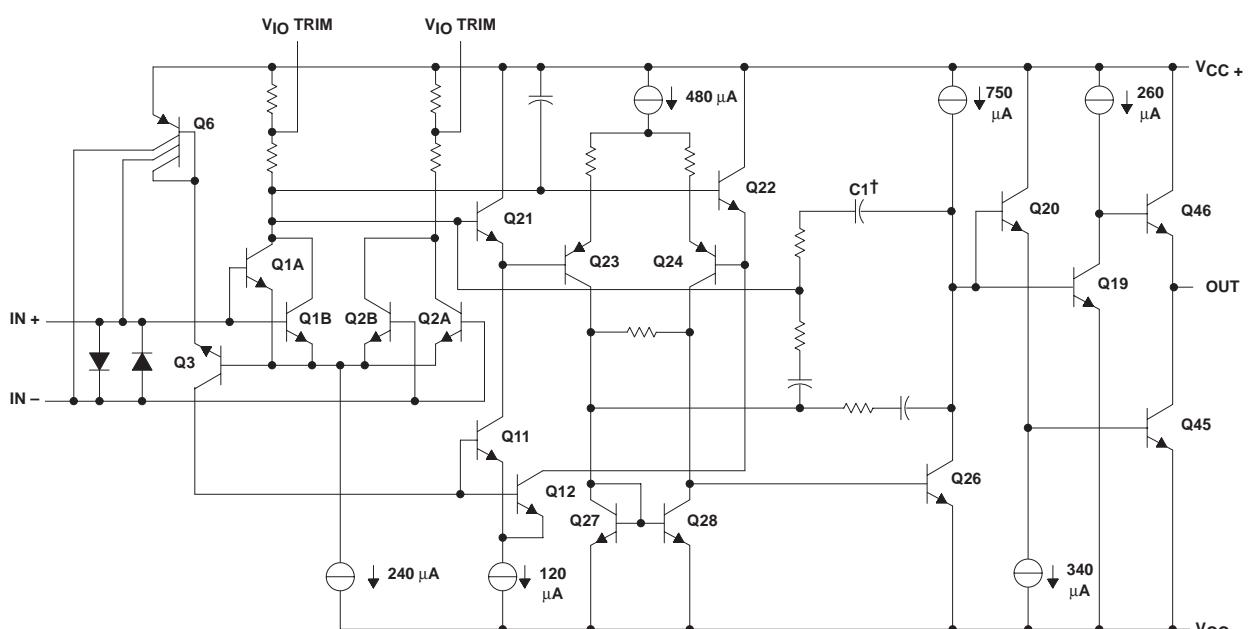

[†] C1 = 120 pF for OP27
C1 = 15 pF for OP37

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G**

LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS

SI OS100B – FEBRUARY 1989 – REVISED AUGUST 1994

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

NOTES:

1. All voltage values are with respect to the midpoint between V_{CC+} and V_{CC-} unless otherwise noted.
2. The inputs are protected by back-to-back diodes. Current-limiting resistors are not used in order to achieve low noise. Excessive input current will flow if a differential input voltage in excess of approximately ± 0.7 V is applied between the inputs unless some limiting resistance is used.

DISSIPATION RATING TABLE

| PACKAGE | T _A ≤ 25°C POWER RATING | DERATING FACTOR ABOVE T _A = 25°C | T _A = 85°C POWER RATING | T _A = 125°C POWER RATING |
|---------|---------------------------------------|--|---------------------------------------|--|
| JG | 1050 mW | 8.4 mW/°C | 546 mW | 210 mW |
| FK | 1375 mW | 11.0 mW/°C | 715 mW | 275 mW |
| P | 1000 mW | 8.0 mW/°C | 520 mW | N/A |

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

recommended operating conditions

| | | | OP27A, OP37A | | | OP27C, OP37C | | | UNIT |
|---------------------------------------|--|--|--------------|-----|-----|--------------|-----|-----|------|
| | | | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC+} | | | 4 | 15 | 22 | 4 | 15 | 22 | V |
| Supply voltage, V_{CC-} | | | -4 | -15 | -22 | -4 | -15 | -22 | V |
| Common-mode input voltage, V_{IC} | $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ C$ | | ± 11 | | | ± 11 | | | V |
| | $V_{CC\pm} = \pm 15$ V, $T_A = -55^\circ C$ to $125^\circ C$ | | ± 10.3 | | | ± 10.2 | | | |
| Operating free-air temperature, T_A | | | -55 | | 125 | -55 | | 125 | °C |

electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | T_A^\dagger | OP27A, OP37A | | | OP27C, OP37C | | | UNIT |
|--|---|---------------|---------------------|-------|-----|---------------------|-------|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{IO} Input offset voltage | $V_O = 0$, $V_{IC} = 0$ $R_S = 50 \Omega$, See Note 3 | 25°C | 10 | 25 | | 30 | 100 | | μV |
| | | Full range | | 60 | | | 300 | | |
| αV_{IO} Average temperature coefficient of input offset voltage | | Full range | 0.2 | 0.6 | | 0.4 | 1.8 | | μV/°C |
| Long-term drift of input offset voltage | See Note 4 | | 0.2 | 1 | | 0.4 | 2 | | μV/mo |
| I_{IO} Input offset current | $V_O = 0$, $V_{IC} = 0$ | 25°C | 7 | 35 | | 12 | 75 | | nA |
| | | Full range | | 50 | | | 135 | | |
| I_{IB} Input bias current | $V_O = 0$, $V_{IC} = 0$ | 25°C | ±10 | ±40 | | ±15 | ±80 | | nA |
| | | Full range | | ±60 | | | ±150 | | |
| V_{ICR} Common-mode input voltage range | | 25°C | 11 to -11 | | | 11 to -11 | | | V |
| | | Full range | 10.3 to -10.3 | | | 10.5 to -10.5 | | | |
| V_{OM} Peak output voltage swing | $R_L \geq 2 \text{ k}\Omega$ | | ±12 | ±13.8 | | ±11.5 | ±13.5 | | V |
| | $R_L \geq 0.6 \text{ k}\Omega$ | | ±10 | ±11.5 | | ±10 | ±11.5 | | |
| | $R_L \geq 2 \text{ k}\Omega$ | Full range | ±11.5 | | | 10.5 | | | |
| AVD Large-signal differential voltage amplification | $R_L \geq 2 \text{ k}\Omega$, $V_O = \pm 10$ V | | 1000 | 1800 | | 700 | 1500 | | V/mV |
| | $R_L \geq 1 \text{ k}\Omega$, $V_O = \pm 10$ V | | 800 | 1500 | | | 1500 | | |
| | $R_L \geq 0.6 \text{ k}\Omega$, $V_O = \pm 1$ V, $V_{CC\pm} = \pm 4$ V | | 250 | 700 | | 200 | 500 | | |
| | $R_L \geq 2 \text{ k}\Omega$, $V_O = \pm 10$ V | Full range | 600 | | | 300 | | | |
| $r_{i(CM)}$ Common-mode input resistance | | | | 3 | | | 2 | | GΩ |
| r_o Output resistance | $V_O = 0$, $I_O = 0$ | 25°C | 70 | | | 70 | | | Ω |
| CMRR Common-mode rejection ratio | $V_{IC} = \pm 11$ V | 25°C | 114 | 126 | | 100 | 120 | | dB |
| | $V_{IC} = \pm 10$ V | Full range | 110 | | | 94 | | | |
| k_{SVR} Supply voltage rejection ratio | $V_{CC\pm} = \pm 4$ V to ± 18 V | 25°C | 100 | 120 | | 94 | 118 | | dB |
| | $V_{CC\pm} = \pm 4.5$ V to ± 18 V | Full range | 96 | | | 86 | | | |

[†] Full range is $-55^\circ C$ to $125^\circ C$.

NOTES: 3. Input offset voltage measurements are performed by automatic test equipment approximately 0.5 seconds after applying power.
4. Long-term drift of input offset voltage refers to the average trend line of offset voltage versus time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{IO} during the first 30 days are typically $2.5 \mu\text{V}$ (see Figure 3).



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G**
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|---------------------------------------|--|-------|-----|-----|------|
| Supply voltage, V_{CC+} | | 4 | 15 | 22 | V |
| Supply voltage, V_{CC-} | | -4 | -15 | -22 | V |
| Common-mode input voltage, V_{IC} | $V_{CC\pm} = \pm 15$ V, $T_A = 25^\circ C$ | ±11 | | | V |
| | $V_{CC\pm} = \pm 15$ V, $T_A = -55^\circ C$ to $125^\circ C$ | ±10.5 | | | |
| Operating free-air temperature, T_A | | -25 | | 85 | °C |

electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | T_A^\dagger | OP27E, OP37E | | | OP27G, OP37G | | | UNIT |
|--|---|---------------|---------------------|-------|-----|---------------------|-------|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{IO} Input offset voltage | $V_O = 0$, $V_{IC} = 0$ $R_S = 50$ Ω, See Note 3 | 25°C | 10 | 25 | | 30 | 100 | | μV |
| | | Full range | | 60 | | | 220 | | |
| αV_{IO} Average temperature coefficient of input offset voltage | | Full range | 0.2 | 0.6 | | 0.4 | 1.8 | | μV/°C |
| Long-term drift of input offset voltage | See Note 4 | | 0.2 | 1 | | 0.4 | 2 | | μV/mo |
| I_{IO} Input offset current | $V_O = 0$, $V_{IC} = 0$ | 25°C | 7 | 35 | | 12 | 75 | | nA |
| | | Full range | | 50 | | | 135 | | |
| I_{IB} Input bias current | $V_O = 0$, $V_{IC} = 0$ | 25°C | ±10 | ±40 | | ±15 | ±80 | | nA |
| | | Full range | | ±60 | | | ±150 | | |
| V_{ICR} Common-mode input voltage range | | 25°C | 11 to -11 | | | 11 to -11 | | | V |
| | | Full range | 10.3 to -10.3 | | | 10.5 to -10.5 | | | |
| V_{OM} Peak output voltage swing | $R_L \geq 2$ kΩ | | ±12 | ±13.8 | | ±11.5 | ±13.5 | | V |
| | $R_L \geq 0.6$ kΩ | | ±10 | ±11.5 | | ±10 | ±11.5 | | |
| | $R_L \geq 2$ kΩ | Full range | ±11.5 | | | 10.5 | | | |
| AVD Large-signal differential voltage amplification | $R_L \geq 2$ kΩ, $V_O = \pm 10$ V | | 1000 | 1800 | | 700 | 1500 | | V/mV |
| | $R_L \geq 1$ kΩ, $V_O = \pm 10$ V | | 800 | 1500 | | | 1500 | | |
| | $R_L \geq 0.6$ kΩ, $V_O = \pm 1$ V, $V_{CC\pm} = \pm 4$ V | | 250 | 700 | | 200 | 500 | | |
| | $R_L \geq 2$ kΩ, $V_O = \pm 10$ V | Full range | 600 | | | 450 | | | |
| $r_{i(CM)}$ Common-mode input resistance | | | | 3 | | | 2 | | GΩ |
| r_o Output resistance | $V_O = 0$, $I_O = 0$ | 25°C | | 70 | | | 70 | | Ω |
| CMRR Common-mode rejection ratio | $V_{IC} = \pm 11$ V | 25°C | 114 | 126 | | 100 | 120 | | dB |
| | $V_{IC} = \pm 10$ V | Full range | 110 | | | 96 | | | |
| k_{SVR} Supply voltage rejection ratio | $V_{CC\pm} = \pm 4$ V to ± 18 V | 25°C | 100 | 120 | | 94 | 118 | | dB |
| | $V_{CC\pm} = \pm 4.5$ V to ± 18 V | Full range | 96 | | | 90 | | | |

† Full range is $-25^\circ C$ to $85^\circ C$.

NOTES: 3. Input offset voltage measurements are performed by automatic test equipment approximately 0.5 seconds after applying power.
4. Long-term drift of input offset voltage refers to the average trend line of offset voltage versus time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{IO} during the first 30 days are typically 2.5 μV (see Figure 3).



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

OP27 operating characteristics over operating free-air temperature range, $V_{CC\pm} = \pm 15$ V

| PARAMETER | TEST CONDITIONS | OP27A, OP27E | | | OP27C, OP27G | | | UNIT |
|---|--|--------------|------|------|--------------|------|------|------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| SR Slew rate | $A_VD \geq 1$, $R_L \geq 2 \text{ k}\Omega$ | 1.7 | 2.8 | | 1.7 | 2.8 | | V/ μ s |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}$, $R_S = 20 \Omega$, See Figure 34 | | 0.08 | 0.18 | | 0.09 | 0.25 | μ V |
| V_n Equivalent input noise voltage | $f = 10 \text{ Hz}$, $R_S = 20 \Omega$ | | 3.5 | 5.5 | | 3.8 | 8 | nV/ $\sqrt{\text{Hz}}$ |
| | $f = 30 \text{ Hz}$, $R_S = 20 \Omega$ | | 3.1 | 4.5 | | 3.3 | 5.6 | |
| | $f = 1 \text{ kHz}$, $R_S = 20 \Omega$ | | 3 | 3.8 | | 3.2 | 4.5 | |
| I_n Equivalent input noise current | $f = 10 \text{ Hz}$, See Figure 35 | | 1.5 | 4 | | 1.5 | | pA/ $\sqrt{\text{Hz}}$ |
| | $f = 30 \text{ Hz}$, See Figure 35 | | 1 | 2.3 | | 1 | | |
| | $f = 1 \text{ kHz}$, See Figure 35 | | 0.4 | 0.6 | | 0.4 | 0.6 | |
| Gain-bandwidth product | $f = 100 \text{ kHz}$ | 5 | 8 | | 5 | 8 | | MHz |

OP37 operating characteristics over operating free-air temperature range, $V_{CC\pm} = \pm 15$ V

| PARAMETER | TEST CONDITIONS | OP37A, OP37E | | | OP37C, OP37G | | | UNIT |
|---|--|--------------|------|------|--------------|------|------|------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| SR Slew rate | $A_VD \geq 5$, $R_L \geq 2 \text{ k}\Omega$ | 11 | 17 | | 11 | 17 | | V/ μ s |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1 \text{ Hz to } 10 \text{ Hz}$, $R_S = 20 \Omega$, See Figure 34 | | 0.08 | 0.18 | | 0.09 | 0.25 | μ V |
| V_n Equivalent input noise voltage | $f = 10 \text{ Hz}$, $R_S = 20 \Omega$ | | 3.5 | 5.5 | | 3.8 | 8 | nV/ $\sqrt{\text{Hz}}$ |
| | $f = 30 \text{ Hz}$, $R_S = 20 \Omega$ | | 3.1 | 4.5 | | 3.3 | 5.6 | |
| | $f = 1 \text{ kHz}$, $R_S = 20 \Omega$ | | 3 | 3.8 | | 3.2 | 4.5 | |
| I_n Equivalent input noise current | $f = 10 \text{ Hz}$, See Figure 35 | | 1.5 | 4 | | 1.5 | | pA/ $\sqrt{\text{Hz}}$ |
| | $f = 30 \text{ Hz}$, See Figure 35 | | 1 | 2.3 | | 1 | | |
| | $f = 1 \text{ kHz}$, See Figure 35 | | 0.4 | 0.6 | | 0.4 | 0.6 | |
| Gain-bandwidth product | $f = 10 \text{ kHz}$ | 45 | 63 | | 45 | 63 | | MHz |
| | $A_V \geq 5$, $f = 1 \text{ MHz}$ | 40 | | | 40 | | | |

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G**
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

Table of Graphs

| | | FIGURE |
|------------------------|-------------------------------------|--|
| V_{IO} | Input offset voltage | vs Temperature 1 |
| ΔV_{IO} | Change in input offset voltage | vs Time after power on 2 vs Time (long-term drift) 3 |
| I_{IO} | Input offset current | vs Temperature 4 |
| I_{IB} | Input bias current | vs Temperature 5 |
| V_{ICR} | Common-mode input voltage range | vs Supply voltage 6 |
| V_{OM} | Maximum peak output voltage | vs Load resistance 7 |
| $V_{O(PP)}$ | Maximum peak-to-peak output voltage | vs Frequency 8, 9 |
| A_{VD} | Differential voltage amplification | vs Supply voltage 10 vs Load resistance 11 vs Frequency 12, 13, 14 |
| $CMRR$ | Common-mode rejection ratio | vs Frequency 15 |
| k_{SVR} | Supply voltage rejection ratio | vs Frequency 16 |
| SR | Slew rate | vs Temperature 17 |
| | | vs Supply voltage 18 |
| | | vs Load resistance 19 |
| ϕ_m | Phase margin | vs Temperature 20, 21 |
| ϕ | Phase shift | vs Frequency 12, 13 |
| V_n | Equivalent input noise voltage | vs Bandwidth 22 |
| | | vs Source resistance 23 |
| | | vs Supply voltage 24 |
| | | vs Temperature 25 |
| | | vs Frequency 26 |
| I_n | Equivalent input noise current | vs Frequency 27 |
| Gain-bandwidth product | | vs Temperature 20, 21 |
| I_{OS} | Short-circuit output current | vs Time 28 |
| I_{CC} | Supply current | vs Supply voltage 29 |
| Pulse response | | Small signal 30, 32 Large signal 31, 33 |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

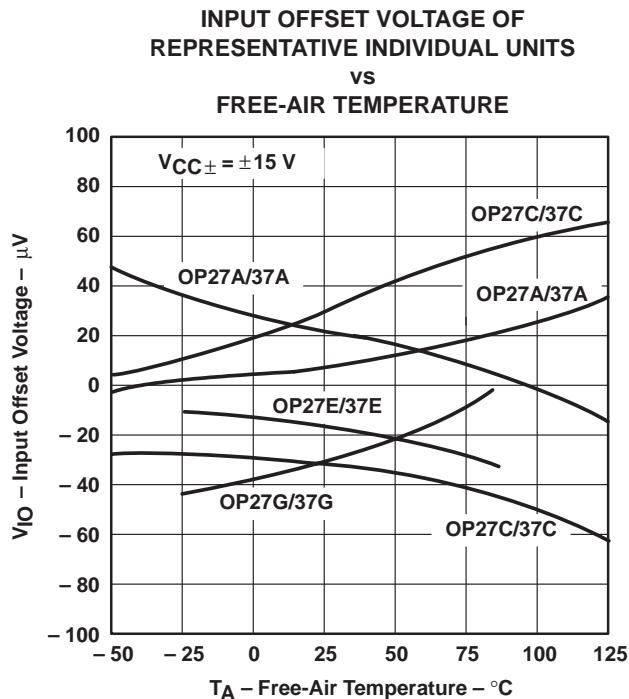


Figure 1

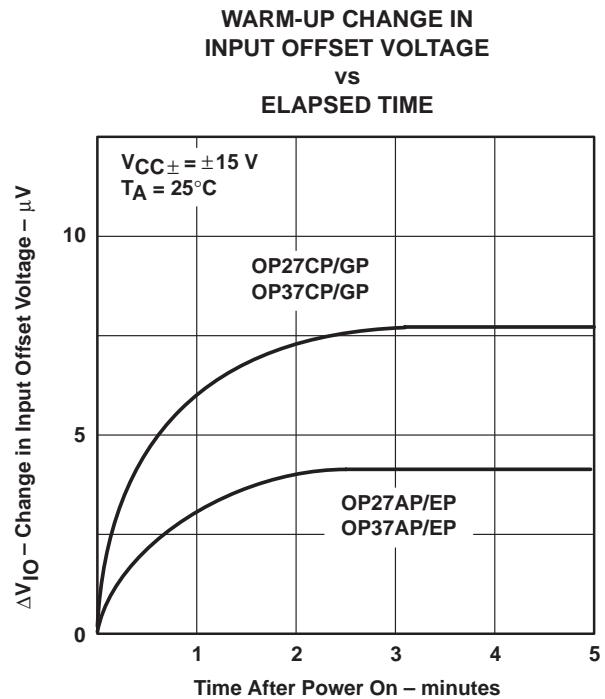


Figure 2

**LONG-TERM DRIFT OF INPUT OFFSET VOLTAGE OF
REPRESENTATIVE INDIVIDUAL UNITS**

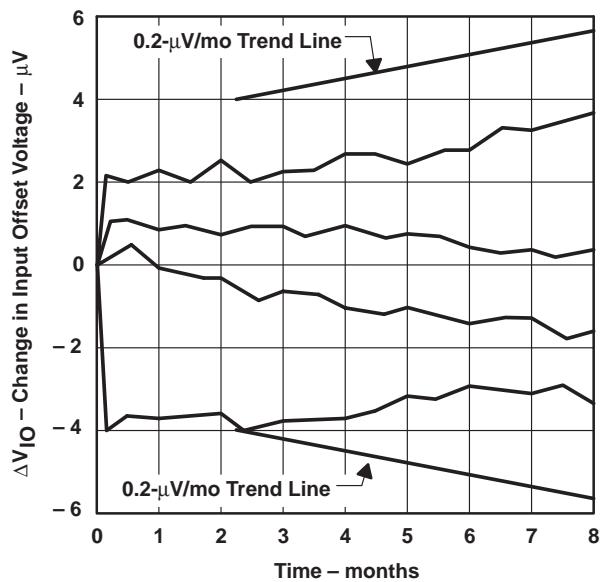


Figure 3

† Data for temperatures below -25°C and above 85°C are applicable to the OP27A, OP27C, OP37A, and OP37C only.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

OP27A, OP27C, OP27E, OP27G
 OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
 SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

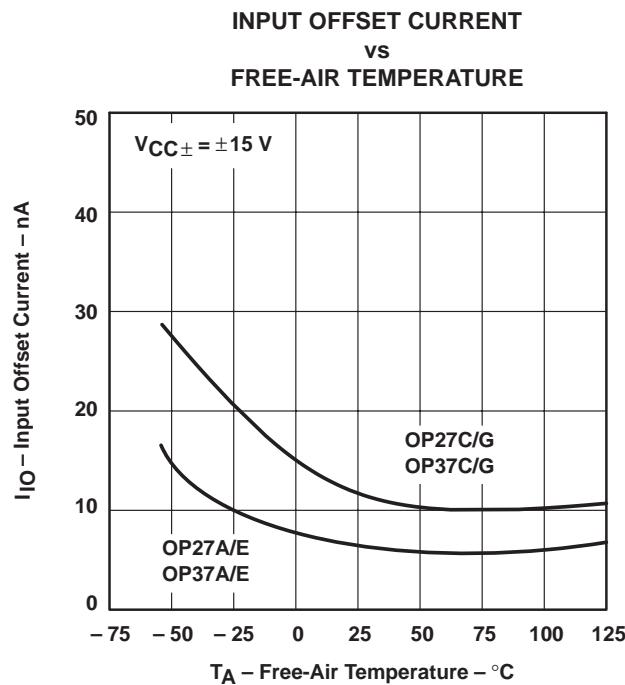


Figure 4

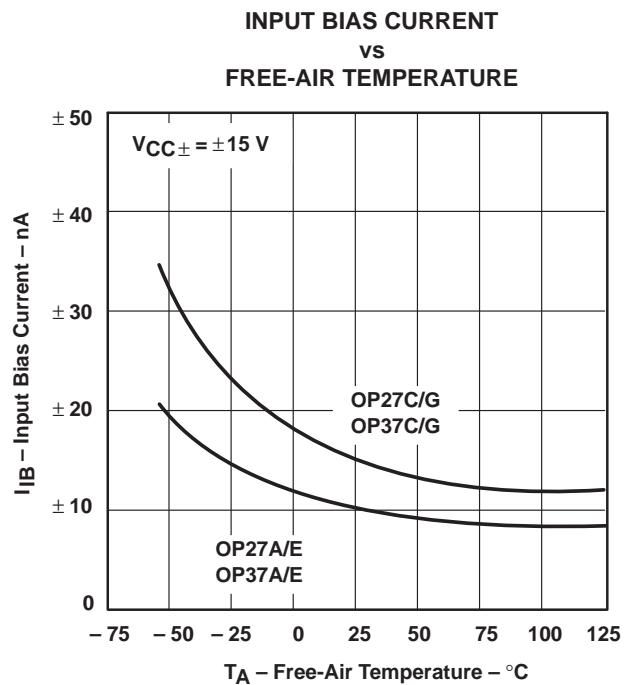


Figure 5

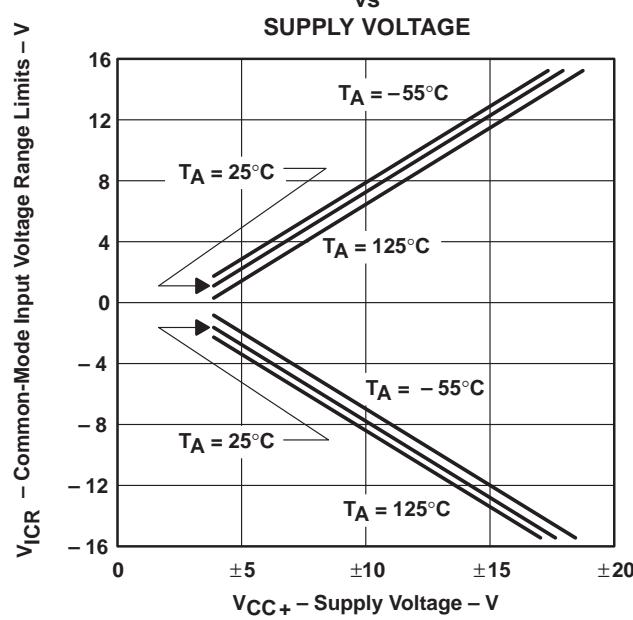


Figure 6

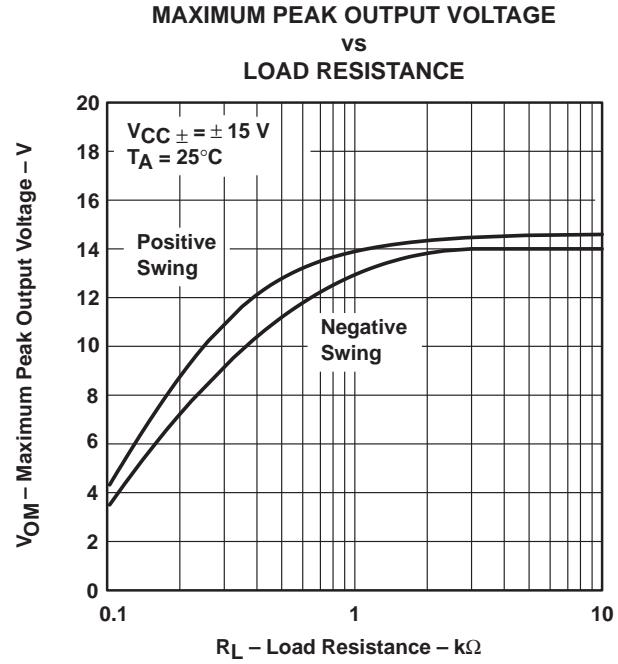


Figure 7

† Data for temperatures below $-25^\circ C$ and above $85^\circ C$ are applicable to the OP27A, OP27C, OP37A, and OP37C only.

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

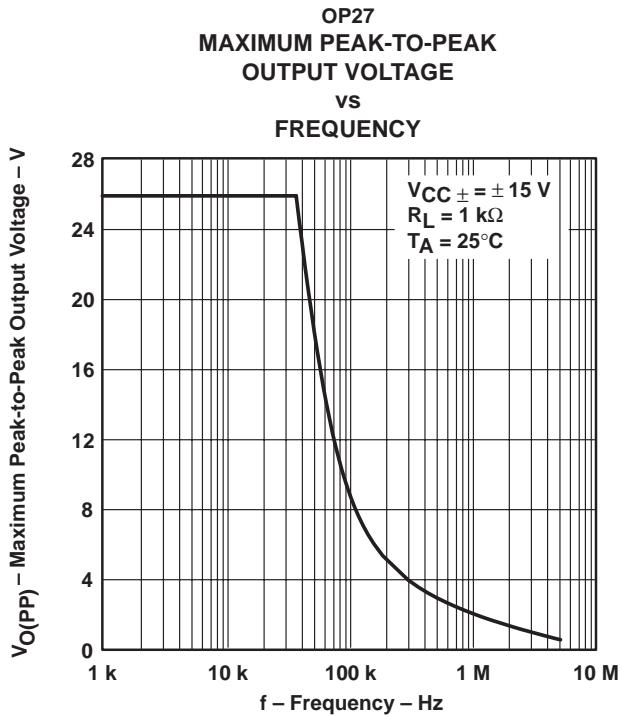


Figure 8

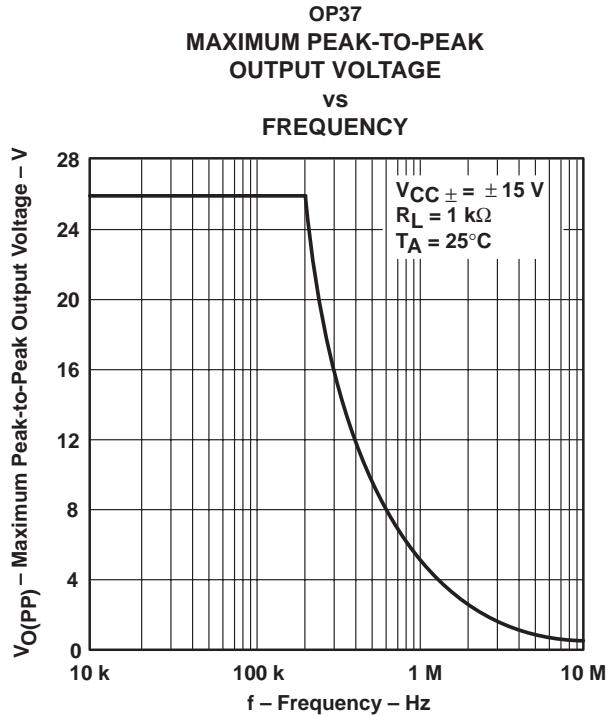


Figure 9

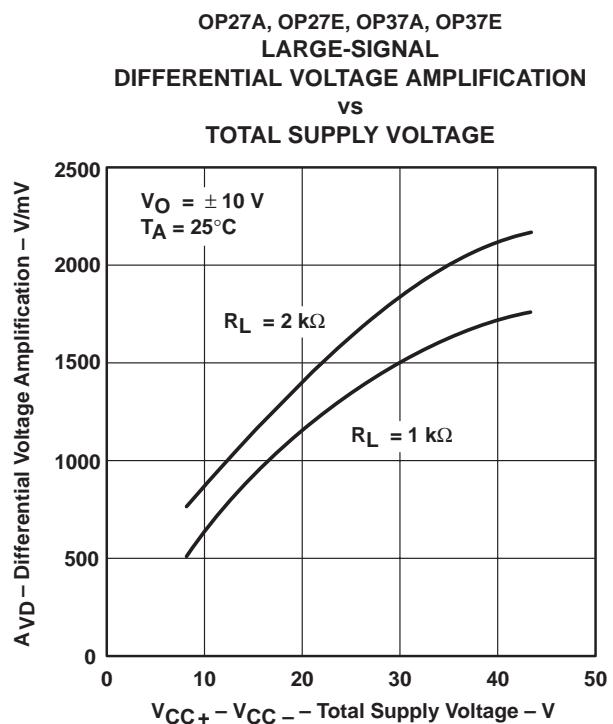


Figure 10

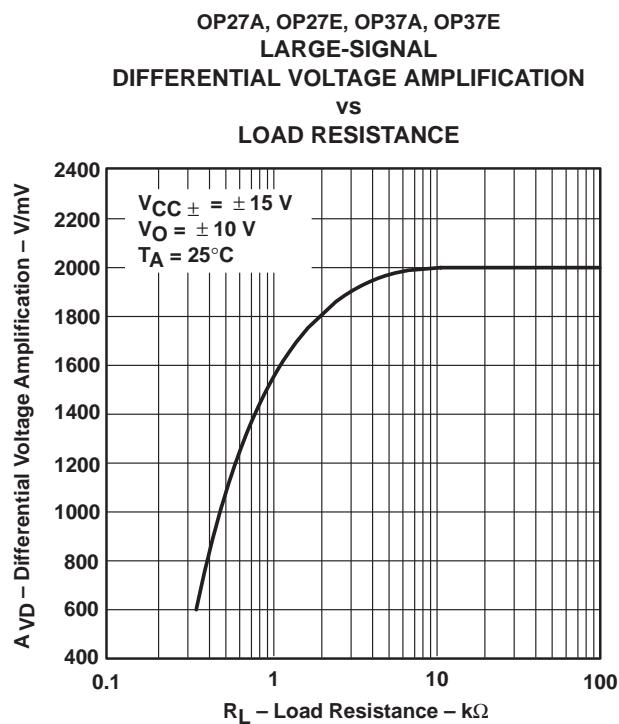


Figure 11

OP27A, OP27C, OP27E, OP27G
 OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
 SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

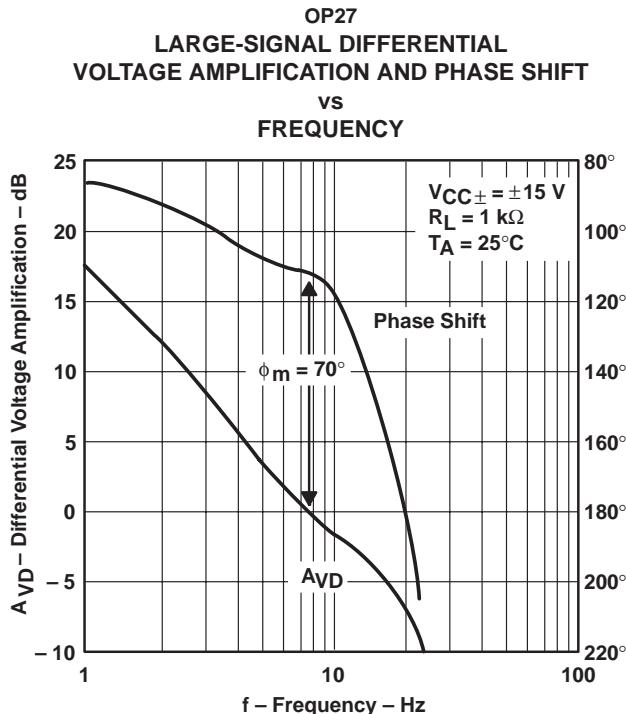


Figure 12

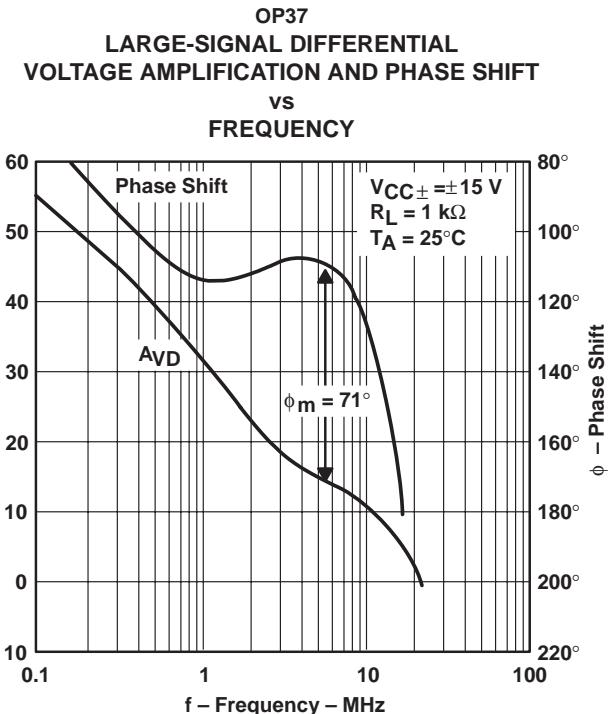


Figure 13

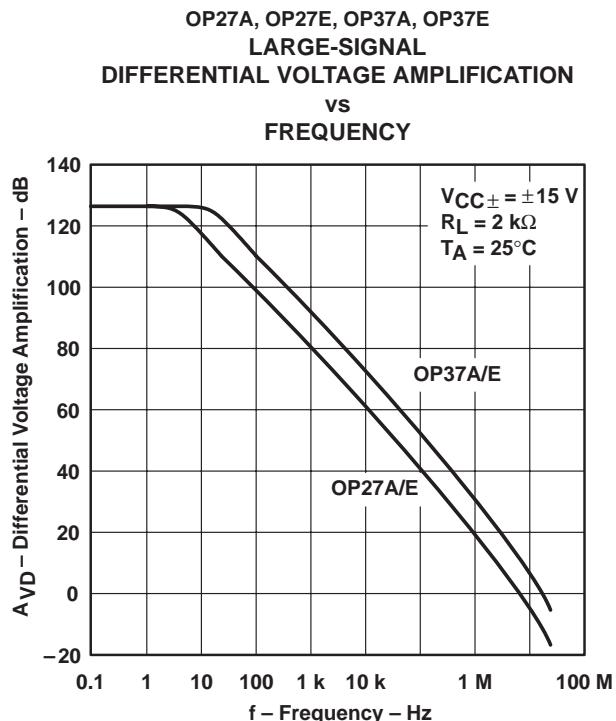


Figure 14

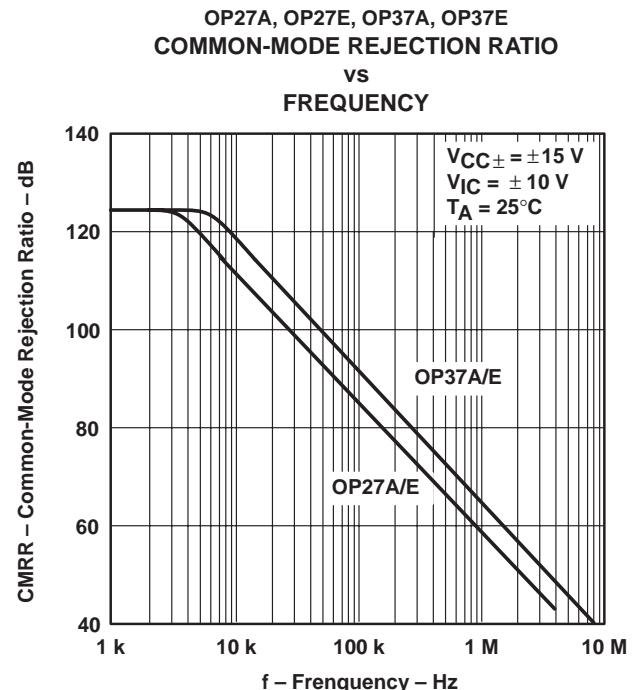


Figure 15

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

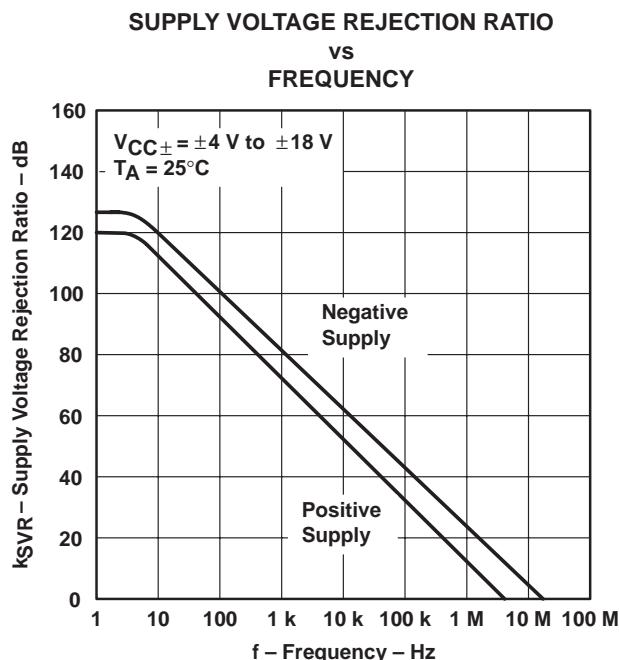


Figure 16

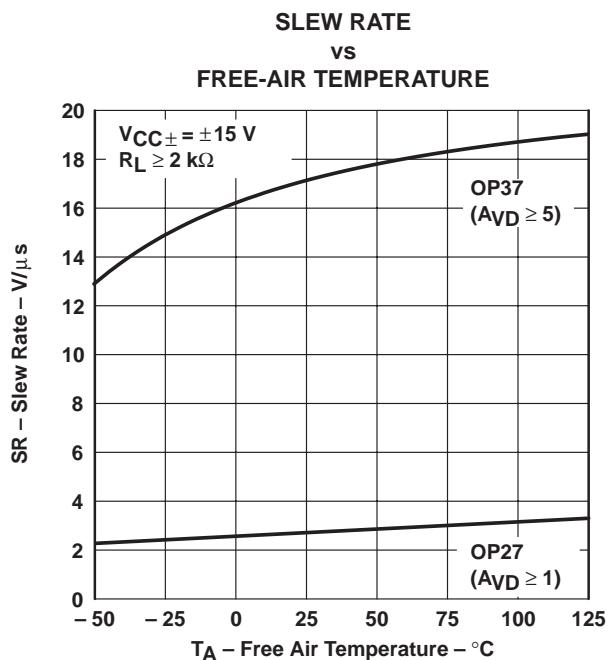


Figure 17

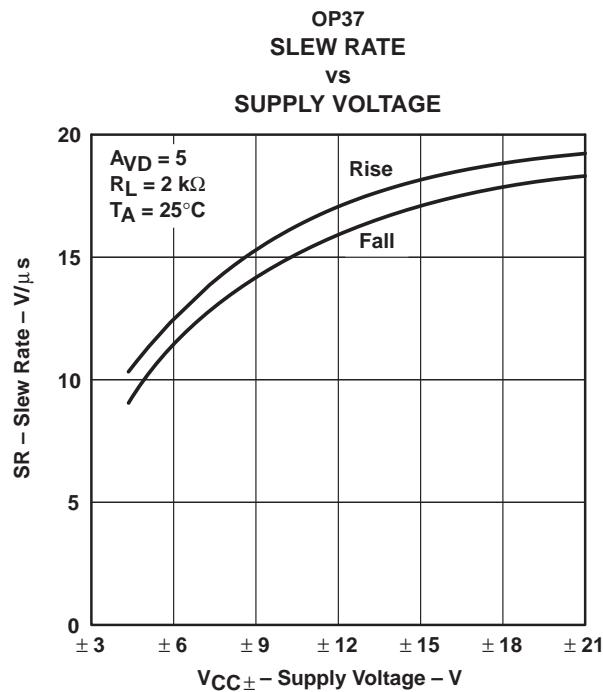


Figure 18

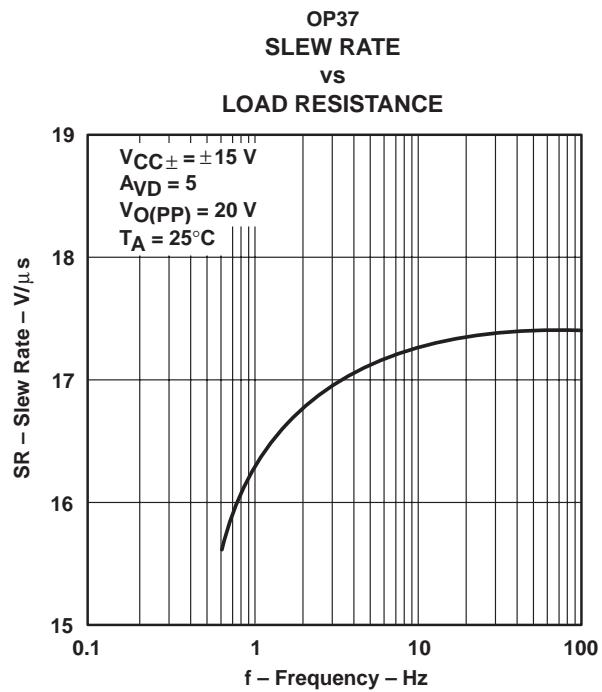


Figure 19

† Data for temperatures below -25°C and above 85°C are applicable to the OP27A, OP27C, OP37A, and OP37C only.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

OP27A, OP27C, OP27E, OP27G
 OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
 SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

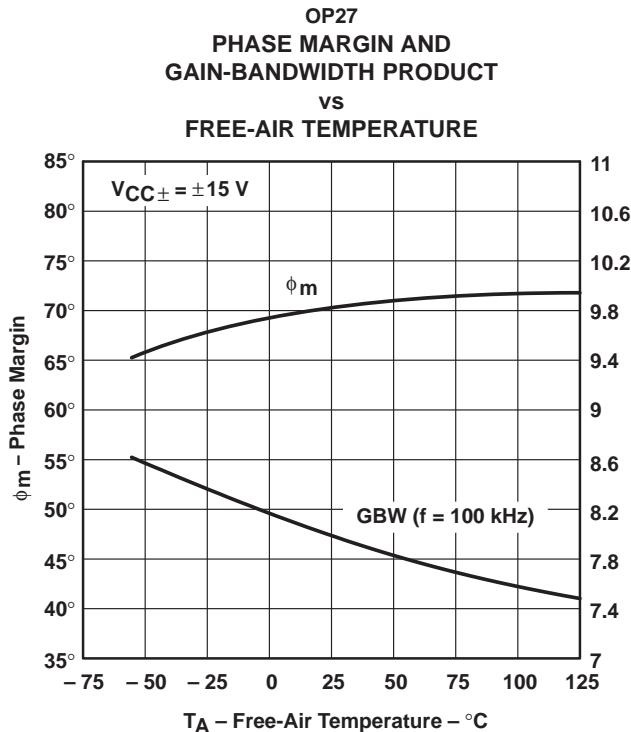


Figure 20

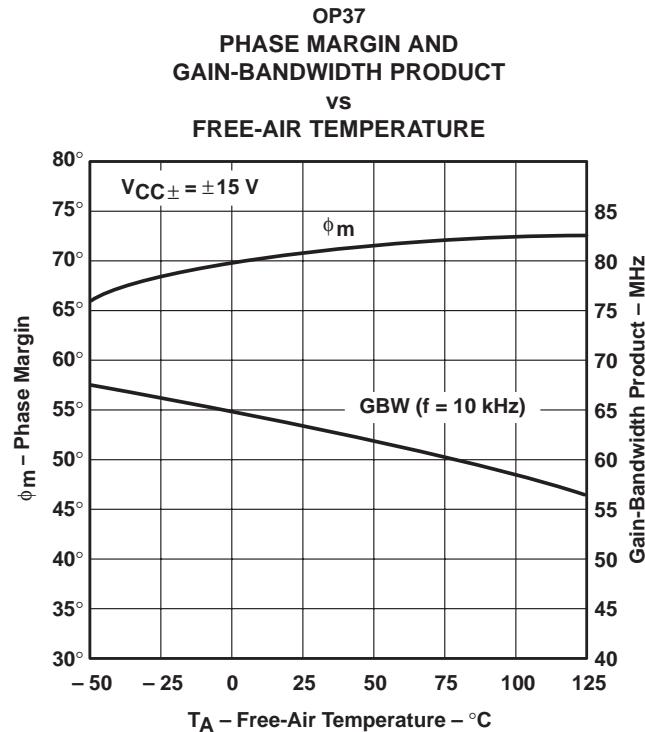


Figure 21

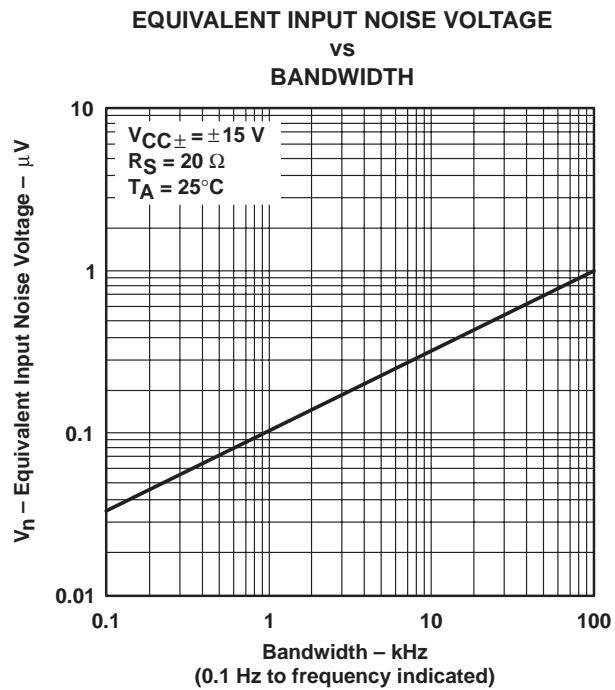


Figure 22

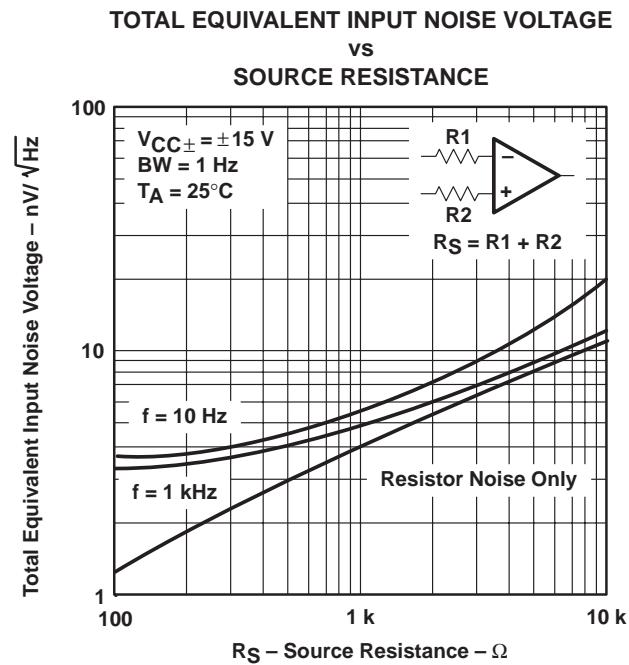


Figure 23

† Data for temperatures below -25°C and above 85°C are applicable to the OP27A, OP27C, OP37A, and OP37C only.

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

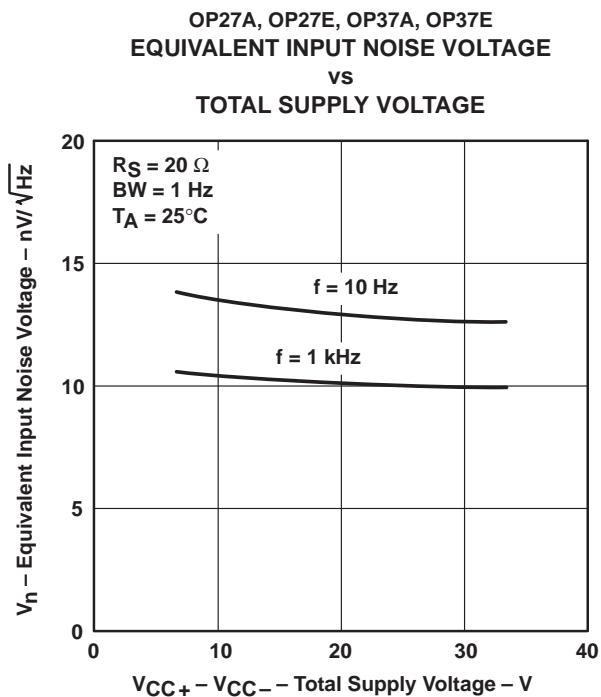


Figure 24

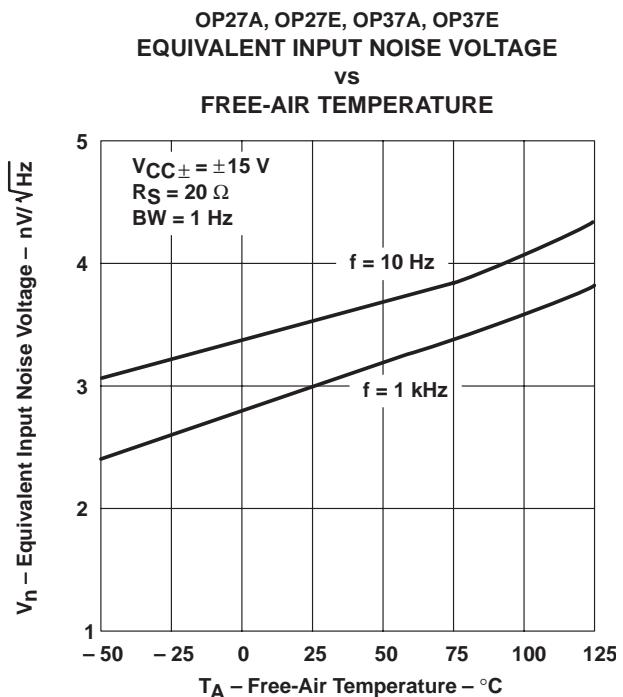


Figure 25

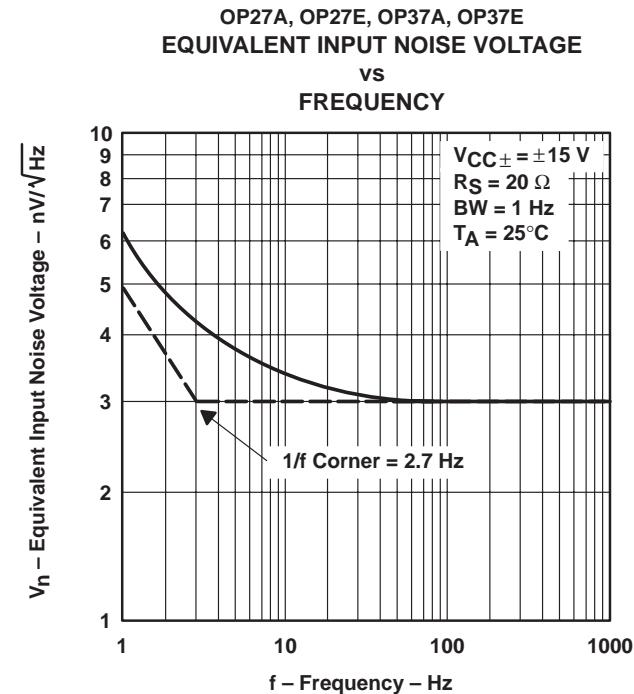


Figure 26

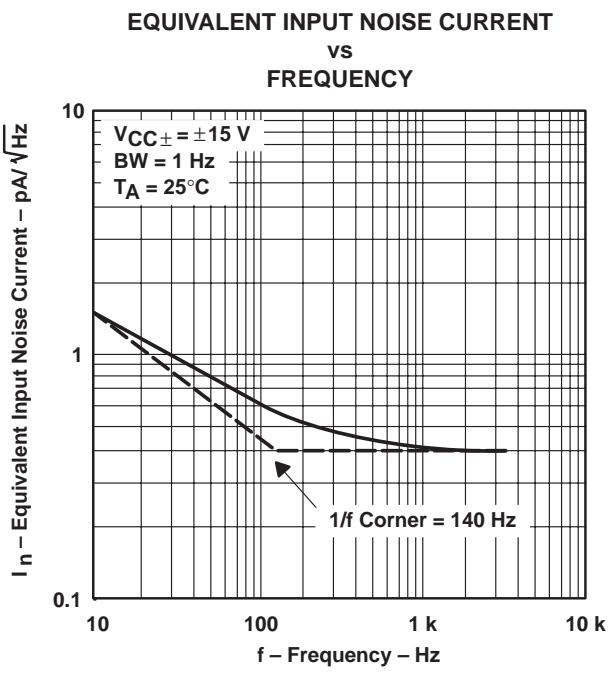


Figure 27

† Data for temperatures below -25°C and above 85°C are applicable to the OP27A, OP27C, OP37A, and OP37C only.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

OP27A, OP27C, OP27E, OP27G
 OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
 SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS†

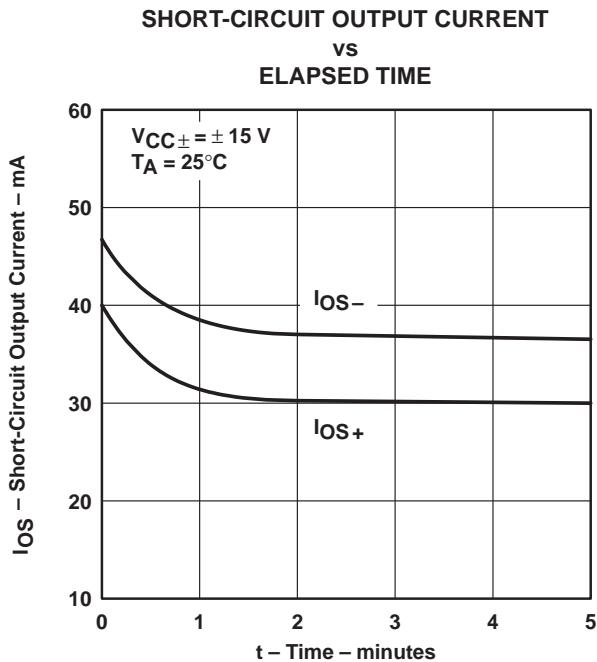


Figure 28

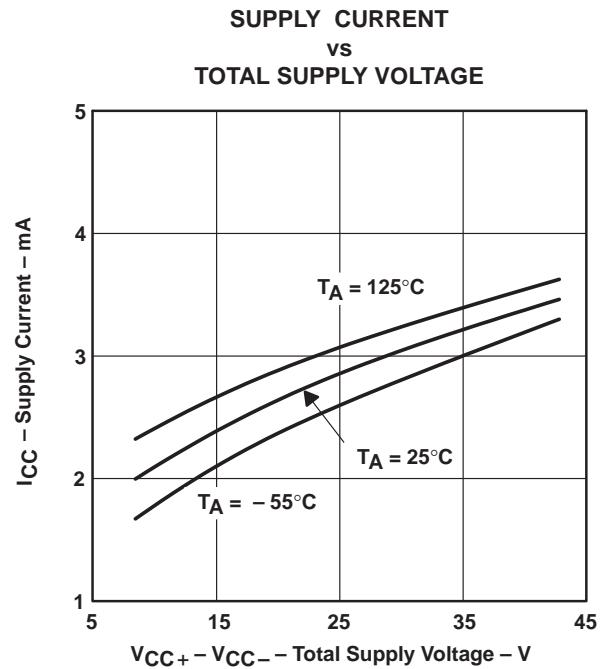


Figure 29

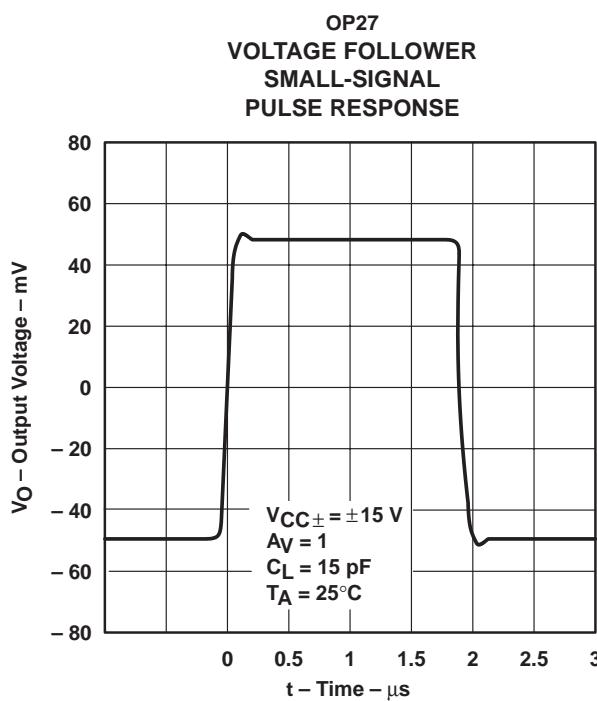


Figure 30

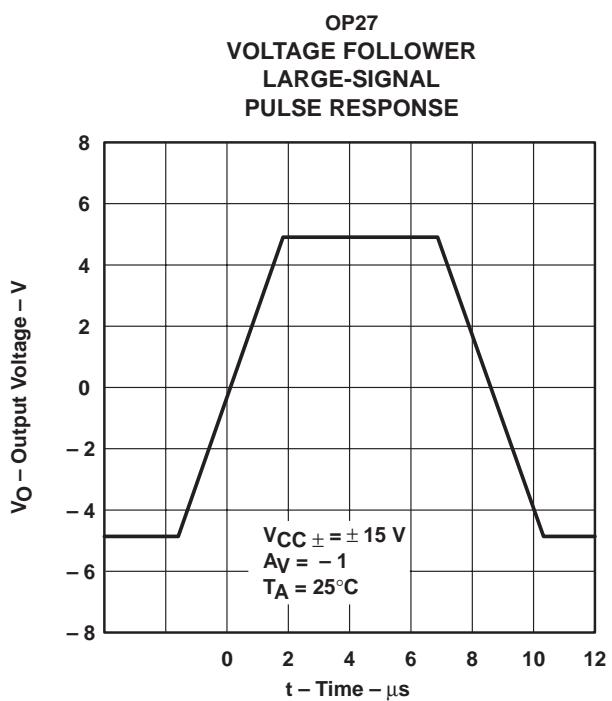


Figure 31

† Data for temperatures below -25°C and above 85°C are applicable to the OP27A, OP27C, OP37A, and OP37C only.

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

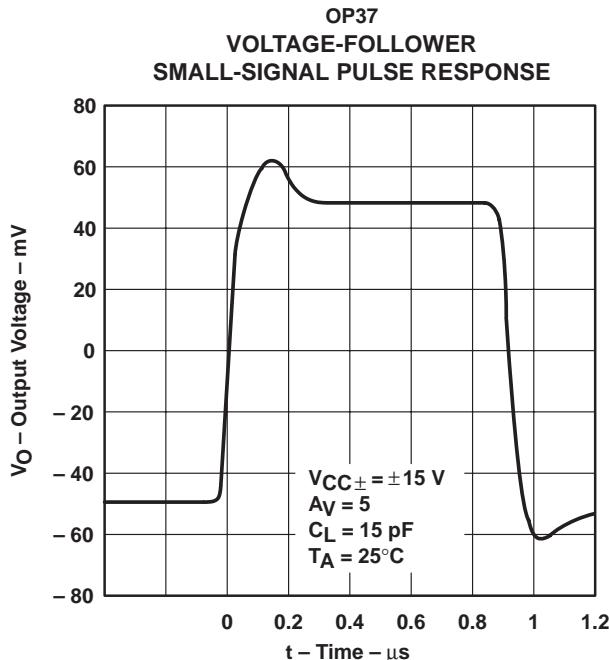


Figure 32

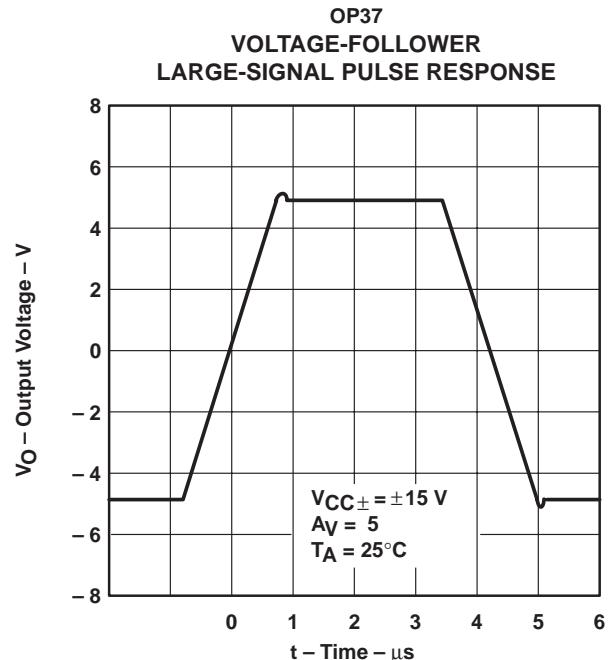


Figure 33

APPLICATION INFORMATION

general

The OP27 and OP37 series devices can be inserted directly onto OP07, OP05, μ A725, and SE5534 sockets with or without removing external compensation or nulling components. In addition, the OP27 and OP37 can be fitted to μ A741 sockets by removing or modifying external nulling components.

noise testing

Figure 34 shows a test circuit for 0.1-Hz to 10-Hz peak-to-peak noise measurement of the OP27 and OP37. The frequency response of this noise tester indicates that the 0.1-Hz corner is defined by only one zero. Because the time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1 Hz, the test time to measure 0.1-Hz to 10-Hz noise should not exceed 10 seconds.

Measuring the typical 80-nV peak-to-peak noise performance of the OP27 and OP37 requires the following special test precautions:



1. The device should be warmed up for at least five minutes. As the operational amplifier warms up, the offset voltage typically changes $4 \mu V$ due to the chip temperature increasing from $10^\circ C$ to $20^\circ C$ starting from the moment the power supplies are turned on. In the 10-s measurement interval, these temperature-induced effects can easily exceed tens of nanovolts.
2. For similar reasons, the device should be well shielded from air currents to eliminate the possibility of thermoelectric effects in excess of a few nanovolts, which would invalidate the measurements.
3. Sudden motion in the vicinity of the device should be avoided, as it produces a feedthrough effect that increases observed noise.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

OP27A, OP27C, OP27E, OP27G
 OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS
 SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

APPLICATION INFORMATION

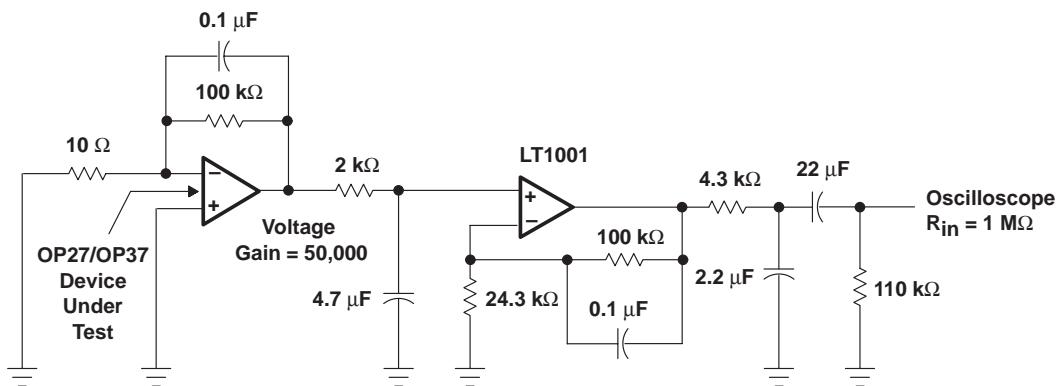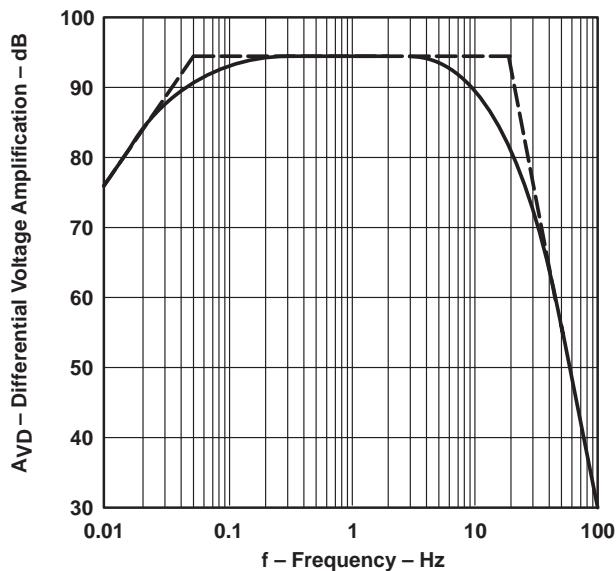

NOTE: All capacitor values are for nonpolarized capacitors only.

Figure 34. 0.1-Hz to 10-Hz Peak-to-Peak Noise Test Circuit and Frequency Response

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**

SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

APPLICATION INFORMATION

When measuring noise on a large number of units, a noise-voltage density test is recommended. A 10-Hz noise-voltage density measurement correlates well with a 0.1-Hz to 10-Hz peak-to-peak noise reading since both results are determined by the white noise and the location of the 1/f corner frequency.

Figure 35 shows a circuit measuring current noise and the formula for calculating current noise.

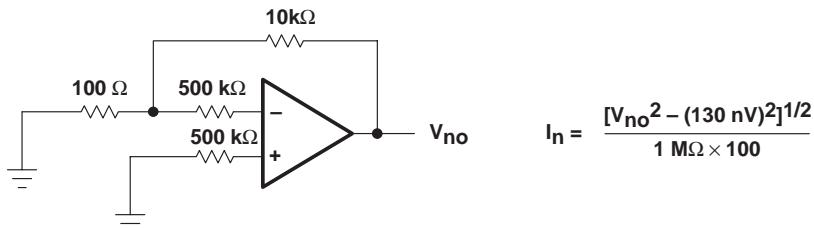


Figure 35. Current Noise Test Circuit and Formula

offset voltage adjustment

The input offset voltage and temperature coefficient of the OP27 and OP37 are permanently trimmed to a low level at wafer testing. However, if further adjustment of V_{IO} is necessary, using a 10-kΩ nulling potentiometer as shown in Figure 36 does not degrade the temperature coefficient α_{VIO} . Trimming to a value other than zero creates an α_{VIO} of $V_{IO}/300 \mu\text{V}/^\circ\text{C}$. For example, if V_{IO} is adjusted to 300 μV , the change in α_{VIO} is 1 $\mu\text{V}/^\circ\text{C}$.

The adjustment range with a 10-kΩ potentiometer is approximately $\pm 2.5 \text{ mV}$. If a smaller adjustment range is needed, the sensitivity and resolution of the nulling can be improved by using a smaller potentiometer in conjunction with fixed resistors. The example in Figure 37 has an approximate null range of $\pm 200 \mu\text{V}$.

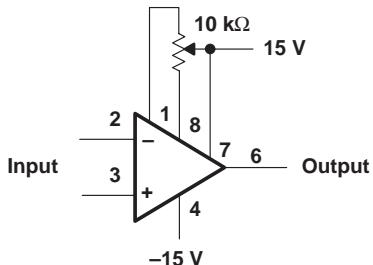


Figure 36. Standard Input Offset Voltage Adjustment

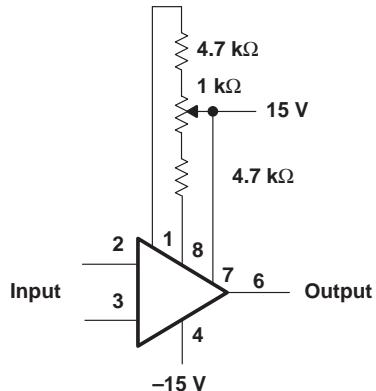


Figure 37. Input Offset Voltage Adjustment With Improved Sensitivity

offset voltage and drift

Unless proper care is exercised, thermoelectric effects caused by temperature gradients across dissimilar metals at the contacts to the input terminals can exceed the inherent temperature coefficient α_{VIO} of the amplifier. Air currents should be minimized, package leads should be short, and the two input leads should be close together and at the same temperature.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265
POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443

APPLICATION INFORMATION

offset voltage and drift (continued)

The circuit shown in Figure 38 measures offset voltage. This circuit can also be used as the burn-in configuration for the OP27 and OP37 with the supply voltage increased to 20 V, $R_1 = R_3 = 10 \text{ k}\Omega$, $R_2 = 200 \Omega$, and $A_{VD} = 100$.

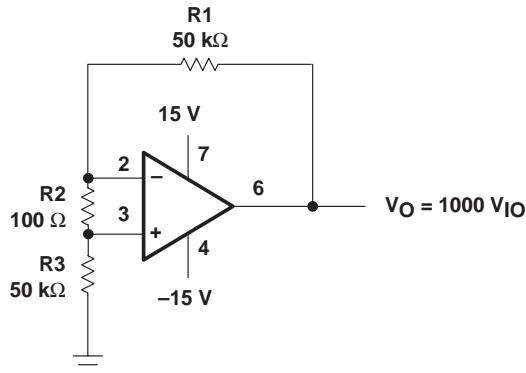

NOTE A: Resistors must have low thermoelectric potential.

Figure 38. Test Circuit for Offset Voltage and Offset Voltage Temperature Coefficient

unity gain buffer applications

The resulting output waveform, when $R_f \leq 100 \Omega$ and the input is driven with a fast large-signal pulse ($> 1 \text{ V}$), is shown in the pulsed-operation diagram in Figure 39.

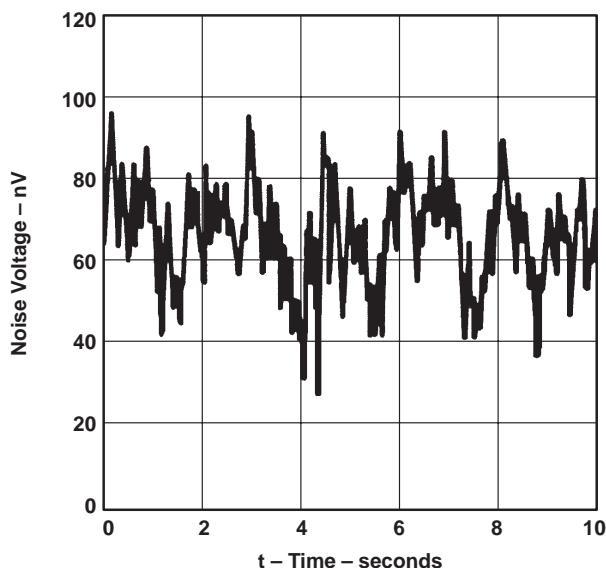


Figure 39. Pulsed Operation


During the initial (fast-feedthrough-like) portion of the output waveform, the input protection diodes effectively short the output to the input, and a current, limited only by the output short-circuit protection, is drawn by the signal generator. When $R_f \geq 500 \Omega$, the output is capable of handling the current requirements (load current $\leq 20 \text{ mA}$ at 10 V), the amplifier stays in its active mode, and a smooth transition occurs. When $R_f > 2 \text{ k}\Omega$, a pole is created with R_f and the amplifier's input capacitance, creating additional phase shift and reducing the phase margin. A small capacitor (20 pF to 50 pF) in parallel with R_f eliminates this problem.

**OP27A, OP27C, OP27E, OP27G
OP37A, OP37C, OP37E, OP37G
LOW-NOISE HIGH-SPEED PRECISION OPERATIONAL AMPLIFIERS**
SLOS100B – FEBRUARY 1989 – REVISED AUGUST 1994

APPLICATION INFORMATION



Type S Thermocouples
 $5.4 \mu\text{V}/^\circ\text{C}$ at 0°C

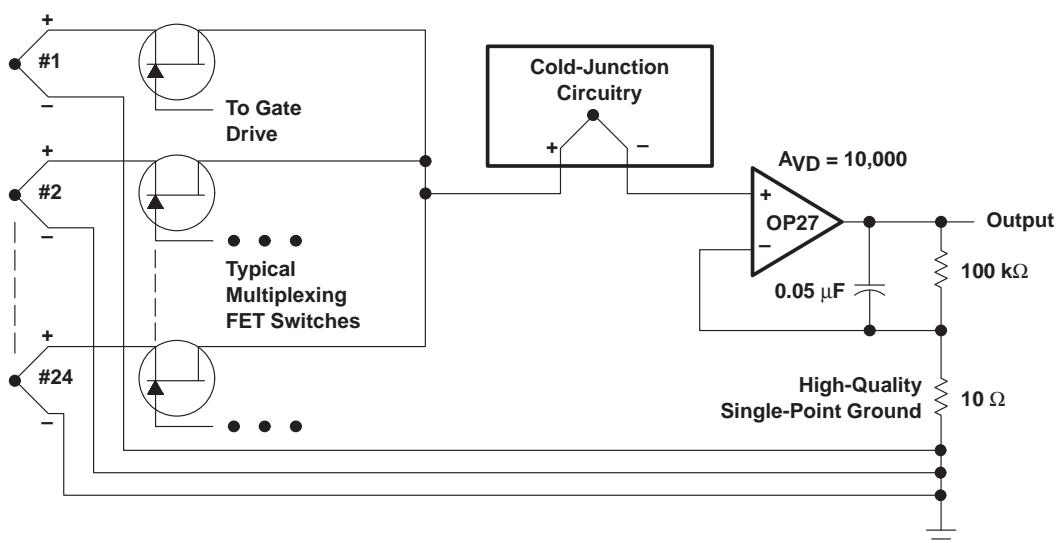

NOTE A: If 24 channels are multiplexed per second and the output is required to settle to 0.1 % accuracy, the amplifier's bandwidth cannot be limited to less than 30 Hz. The peak-to-peak noise contribution of the OP27 will still be only $0.11 \mu\text{V}$, which is equivalent to an error of only 0.02°C .

Figure 40. Low-Noise, Multiplexed Thermocouple Amplifier and 0.1-Hz To 10-Hz Peak-to-Peak Noise Voltage

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.