



AWT6103M5


Cellular Dual Mode AMPS/TDMA Mode
 3.5V/30 dBm Linear Power Amplifier Module
 Advanced Product Information Rev. 1

FEATURES

- InGaP HBT Technology
- High Efficiency 50% AMPS
- High Efficiency 45% TDMA
- Low Leakage Current (<25 μ A)
- SMT Module Package
- Small Foot Print (6mm x 6mm)
- Low Profile (1.6mm)
- 50 Ω Input and Output Matching
- Low Quiescent Current (I_{CQ} 50mA Typ)
- Shut Down and Mode Control

APPLICATIONS

- Dual Mode AMP/TDMA Handsets



6x6mm Module Package

Description

The AWT6103 is a 3.5V power amplifier module for use in Dual Mode AMPS/TDMA handsets.

Absolute Minimum and Maximum Ratings

SIGNAL	MIN	MAX	UNITS
Supply Voltage (V_{CC})		+5	V
Input Power (RF_{IN})		+10	dBm
Bias Voltage (V_{REF})		+3.5	V
V_{MOD} Voltage (V_{MOD})		+3.5	V
Storage Temperature (T_{STG})	-55	100	$^{\circ}$ C
Operating Temperature (T_C)	-25	80	$^{\circ}$ C

Electrical Specifications AMPS:(Unless otherwise specified: $V_{CC} = 3.5V$, $Z_{IN} = Z_{OUT} = 50\Omega$ System, $T_C = 25^\circ C$)

Parameter	Minimal	Typical	Maximum	Units
Frequency Range	824		849	MHz
Supply Voltage Range	3.0	3.5	5.0	V
Ref voltage Range	2.75	2.8	2.9	V
Ref current		2		mA
Output Power, $V_{CC} = 3.5V$	32.0			dBm
Output Power, $V_{CC} = 3.0V$	31.0			dBm
Input Impedance			2:1	
Output Impedance			2:1	
Efficiency $P_{OUT} = 32$ dBm		50		%
I_{CQ} ($V_{MODE} = 2.7V$) Low Power Mode		50		mA
Noise at Receiver Band $P_{OUT} \leq 32$ dbm			-90	dBm/30 kHz
Gain, $P_{OUT} = 32$ dBm		26		dB
Leakage Current $V_{CC} = 3.5V$; $V_{REF} = 0V$; $V_{MODE} = 2.7V$		25		μA
Harmonics 2fo, $P_{OUT} = 32$ dBm		-30		dBc
3fo, $P_{OUT} = 32$ dBm		-30		dBc
Stability (out of band load VSWR < 20:1) (in band load VSWR < 10:1)			-60	dBc, all spurious Pin - 50 dBm ... +0 dBm
Ruggedness Stress for no permanent degradation or failure, $V_{CC} = 5.0 V$	10:1			

Bias Table

V_{MODE}	V	ICQ Typ	Power Range	P_{OUT} Levels	Mode
High	2.7	50 mA	All	0-32 dBm	AMP All Power
High	2.7	50 mA	Low	0-22 dBm	NADC Low Power
Low	0	100 mA	High	22-30 dBm	NADC High Power


Electrical Specifications (TDMA 824-849 MHz)(Unless otherwise specified: $V_{CC} = 3.5V$, $Z_{IN} = Z_{OUT} = 50\Omega$ System, $T_C = 25\text{ }^\circ\text{C}$)

Parameter	Minimum	Typical	Maximum	Units
Frequency Range	824		849	MHz
Supply Voltage Range	3.0	3.5	5.0	V
Ref. Voltage Range	2.75	2.8	2.9	V
Ref. Current		2		mA
Output Power, $V_{CC} = 3.5V$	30			dBm
Output Power, $V_{CC} = 3.0V$	29			dBm
Input VSWR			2:1	
Output VSWR			2:1	
Power Added Efficiency Pout = 30 dBm		45		%
Power Added Efficiency Pout = 16 dBm ($V_{MODE} = 2.7V$) Low Power Mode		7		%
Icq ($V_{MODE} = 2.7V$) Low Power Mode		50		mA
Linearity (P_{OUT} avg. = 30 dBm) & $V_{CC}=3.5V$	NADC - modulation			
ACPR +/- 30 kHz			-28	dBc
ACPR +/- 60 kHz			-48	dBc
ACPR +/- 90 kHz			-50	dBc
Noise at Receiver Band Pout \leq 30 dbm			-90	dBm/30 kHz
Gain, $P_{OUT} = 30$ dBm	25	28	31	
Leakage current $V_{CC}=3.5V$; $V_{MODE}=2.7V$; $V_{REF} = 0V$		25		μA
Harmonics 2fo, $P_{OUT} = 30$ dBm		-30		dBc
3fo, $P_{OUT} = 30$ dBm		-30		dBc
Stability (out of band load VSWR < 20:1) (in band load VSWR < 10:1)			-60	dBc, all spurious Pin - 50 dBm ... +0 dBm
Ruggedness Stress for no permanent degradation or failure, $V_{CC} = 5.0$ V	10:1			

Pin Description

Pin	Name	Description
1	V_{CC}	Supply Voltage
2	RF_{IN}	RF Input Signal
3	V_{REF}	Bias
4	V_{MODE}	Mode Control
5	V_{CC}	Supply Voltage
6	RF_{OUT}	RF output
7	GND	Ground

Package Outline Top View

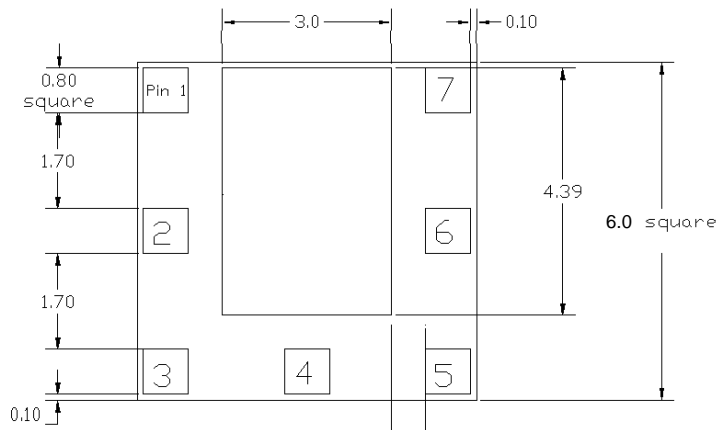

ANADIGICS, Inc.
 35 Technology Drive
 Warren, New Jersey 07059
 Tel: (908) 668-5000
 Fax: (908) 668-5132

<http://www.anadigics.com>
Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The Advanced Product data sheets and product specifications contained in this data sheet are subject to change prior to a products formal introduction. The information in this data sheet has been carefully checked and is assumed to be reliable. However, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.