




# 1N4148

## SMALL-SIGNAL DIODE

Reverse Voltage 100 Volts

Peak Forward Current - 150mA

**DO-35**



\*Dimensions in inches and (millimeters)



### FEATURES

- \* Silicon Epitaxial Planar Diode
- \* Fast switching diode.

### MECHANICAL DATA

**Case :** DO-35 Glass Case  
**Weight :** approx. 0.13 gram

### MAXIMUM RATINGS THERMAL CHARACTERISTICS ( T<sub>A</sub>=25°C unless otherwise noted )

PARAMETER	SYMBOLS	VALUE	UNITS
Continuous Reverse Voltage	V <sub>R</sub>	75	Vdc
Peak Reverse Voltage	V <sub>RM</sub>	100	Vdc
Average Rectified Current Half Wave Rectification with Resistive Load at Tamb = 25°C	I <sub>F(AV)</sub>	150	mAdc
Surge Forward Current at t < 1s and T <sub>j</sub> = 25°C	I <sub>FSM</sub>	500	mAdc
Power Dissipation at Tamb = 25°C <sup>(1)</sup>	P <sub>tot</sub>	500	mW
Thermal Resistance Junction to Ambient Air <sup>(1)</sup>	R <sub>θJA</sub>	350	°C / W
Junction Temperature	T <sub>J</sub>	175	°C
Storage Temperature	T <sub>STG</sub>	-65 to +175	°C

### ELECTRICAL CHARACTERISTICS ( T<sub>A</sub>=25°C unless otherwise noted )

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNITS
Reverse Voltage Leakage Current	( V <sub>R</sub> =20Vdc )	I <sub>R</sub>	-	-	25	nAdc
	( V <sub>R</sub> =75Vdc )		-	-	5	uAdc
	( V <sub>R</sub> =20Vdc, T <sub>J</sub> =150°C )		-	-	50	uAdc
Reverse Breakdown Voltage	( I <sub>R</sub> =100uAdc )	V <sub>(BR)</sub>	100	-	-	Vdc
Forward Voltage	( I <sub>F</sub> =10mAdc )	V <sub>F</sub>	-	-	1.0	Vdc
Junction Capacitance	( V <sub>R</sub> =0, f=1.0MHz )	C <sub>J</sub>	-	-	4	pF
Voltage Rise when Switching ON ( tested with 50 mA Pulses )	( t <sub>p</sub> =0.1us, Rise time < 30ns f <sub>p</sub> =5 to 100 kHz )	V <sub>FR</sub>	-	-	2.5	V
Reverse Recovery Time	( I <sub>F</sub> =10mA, I <sub>R</sub> =1mA, V <sub>R</sub> =6V, R <sub>L</sub> =100Ω )	t <sub>rr</sub>	-	-	4	nS

# RATINGS AND CHARACTERISTIC CURVES OF 1N4148

FIG.1 - FORWARD VOLTAGE VS. JUNCTION TEMPERATURE

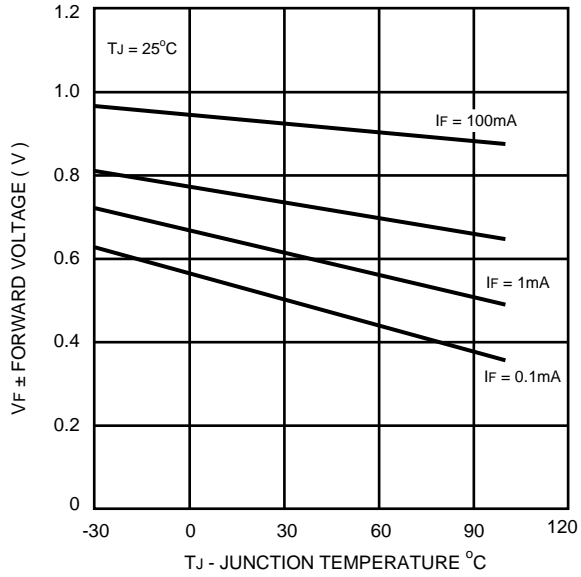


FIG.2 - FORWARD CURRENT VS. FORWARD VOLTAGE

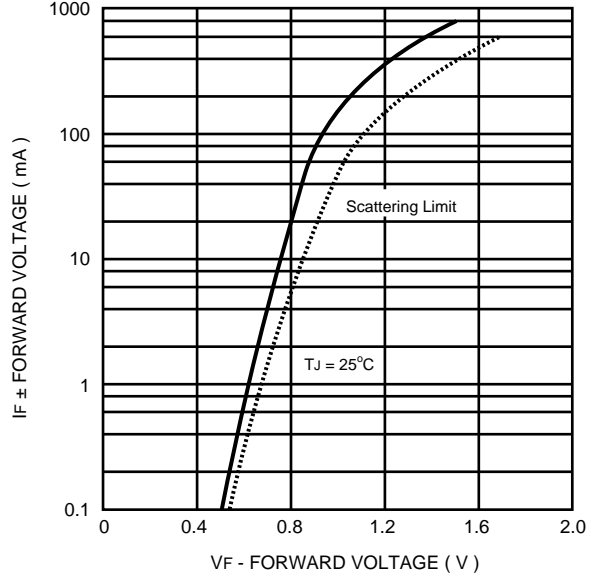


FIG.3 - REVERSE CURRENT VS. REVERSE VOLTAGE

