

UC723

LINEAR INTEGRATED CIRCUIT


ADJUSTABLE VOLTAGE REGULATOR

DESCRIPTION


The Contek UC723 is a silicon monolithic integrated circuit, designed for service as voltage regulator at output voltages, ranging from 2V to 37V at current up to 150mA. It includes a temperature-compensated reference amplifier, an error amplifier, a power series pass transistor, and a current-limiting circuit.

FEATURES

- *Up to 150mA output current
- *Adjustable output voltage (from 2V to 37V)
- *Positive and negative voltage regulation
- *Regulation in excess of 10A with suitable pass transistors
- *Input and output short-circuit protection
- *Load and line regulation < 0.03%

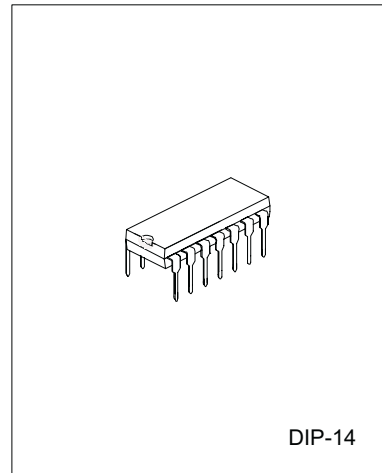

BLOCK DIAGRAM

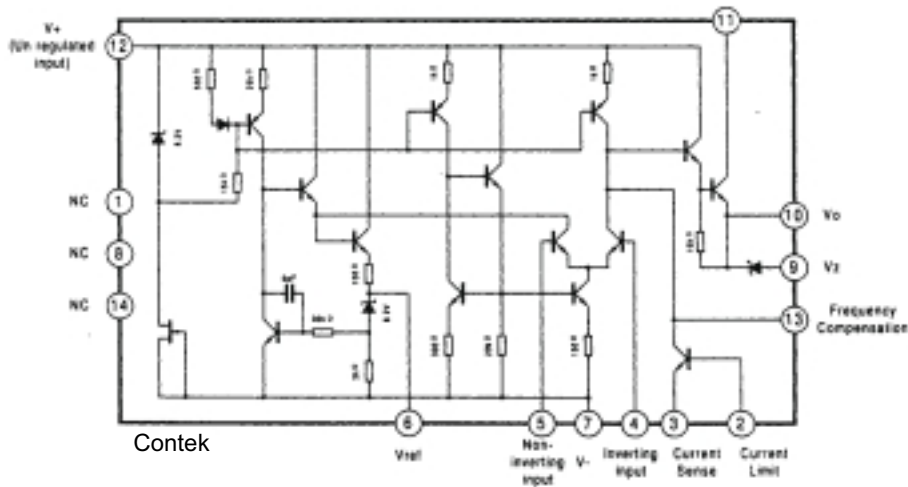

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

ABSOLUTE MAXIMUM RATINGS($T_a=25\text{ C}$)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage(between V+ and V-)	Vcc	40	V
Pulse Voltage for 50ms	Vpulse	50	V
Differential Input-Output Voltage	Vd	40	V
Different Input Voltage (Between inverting and non-inverting inputs)	Vid	+5	V
Different Input Voltage (Between Non-inverting Input and V-)	Vid	8	V
Current from Zener Diode Terminal	Iz	25	mA
Power Dissipation	Pd	900	mW
Operating Temperature	Topr	-55 ~ 125	C
Storage Temperature	Tstr	-65 ~ 150	C

ELECTRICAL CHARACTERISTICS($T_a=25\text{ C}$, $V_+=V_c=V_i=12\text{V}$, $V_o=5\text{V}$, $I_L=1\text{mA}$, $C_1=100\text{Pf}$, $C_{ref}=0$, $R_{scp}=0$, unless otherwise specified, divider impedance $R_1 \cdot R_2 / (R_1 + R_2)$ at non-inverting input, terminal 5=10K Ω)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Regulator Current	ICCQ	$I_L=0$, $V_i=30\text{V}$		2.3	3.5	mA
Input Voltage Range	V_i		9.5		40	V
Output Voltage Range	V_o		2		37	V
Differential Input-Output Voltage	V_i-V_o		3		38	V
Reference Voltage	VREF		6.95	7.15	7.35	V
Line Regulation (note 1)	ΔV_o	$V_i=12\text{V to }40\text{V}$ $V_i=12\text{V to }15\text{V}$ $V_i=12\text{V to }15\text{V}$, $T_a=-55\sim 125\text{ C}$		0.02 0.01	0.2 0.1	% V_o
Load Regulation (note 1)	ΔV_o	$I_L=1\text{mA TO }50\text{mA}$ $I_L=1\text{mA TO }50\text{mA}$, $T_a=-55\sim 125\text{ C}$		0.03	0.15 0.6	% V_o
Output Voltage Temperature Coefficient	ΔV_o	$T_a=-55\sim 125\text{ C}$		0.002	0.015	%/ C
Ripple Rejection (note 2)	RR	$f=50\text{Hz to }10\text{KHz}$ $f=50\text{Hz to }10\text{KHz}$, $C_{ref}=5\mu\text{F}$ $T_{min}<T_{typ}<T_{max}$		74 86 2.5		dB
Short Circuit Limiting Current	ILIM	$R_{scp}=10\Omega$, $V_o=0$		65		mA
Equivalent Noise RMS output Voltage (note 2)	VN	$BW=100\text{Hz to }10\text{KHz}$, $C_{ref}=0$ $BW=100\text{Hz to }10\text{KHz}$, $C_{ref}=5\mu\text{F}$		-20 2.5		μV

NOTE 1: Line and load regulation specifications are given for conditions of a constant chip temperature. For high dissipation condition, temperature drifts must be separately taken in account.


NOTE 2: For C_{ref} , see Fig. 1



UC723


LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUIT

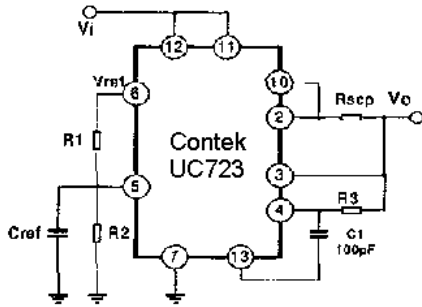


Regulator Output Voltage=5V
 Line Regulation ($\Delta V_i=3V$)=0.5mV
 Load regulation ($\Delta I_L=50mA$)=1.5mV
 Note $R3=R1 \cdot R2 / (R1 + R2)$ for Minimum temperature drift

Fig. 1 Low Voltage Regulator circuit($V_o=2V$ to $7V$)

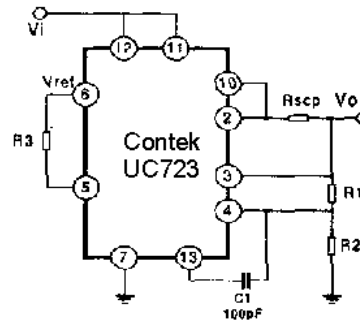


Regulator Output Voltage=5V
 Line Regulation ($\Delta V_i=3V$)=1.5mV
 Load regulation ($\Delta I_L=50mA$)=4.5mV
 Note $R3=R1 \cdot R2 / (R1 + R2)$ for Minimum temperature drift

Fig. 2 High Voltage Regulator circuit($V_o=7V$ to $37V$)

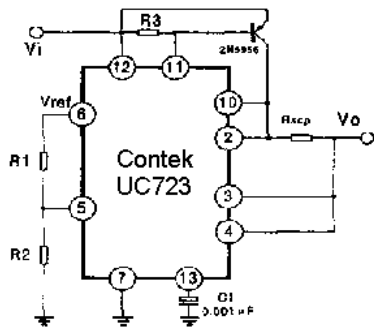

Regulator Output Voltage=5V
 Line Regulation ($\Delta V_i=3V$)=0.5mV
 Load regulation ($\Delta I_L=1A$)=5mV

Fig. 3 Positive Voltage regulator Circuit
 (with external p-n-p pass transistor)



Regulator Output Voltage=15V
 Line Regulation ($\Delta V_i=3V$)=1.5mV
 Load regulation ($\Delta I_L=1A$)=15mV

Fig. 4 Positive Voltage regulator Circuit
 (with external n-p-n pass transistor)



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com

TYPICAL PERFORMANCE CHARACTERISTICS

