



## Dual Output Mixed Voltage, DLV Models

Output Combinations of 3.3V, 2.5V and 1.8V  
30 Watt, DC/DC Converters

*PRELIMINARY*

### Features

- Two independently regulated outputs:  
3.3V @ 6A, 2.5V @ 7A or 1.8V @ 7A
- 30 Watts total output power
- Available input voltage ranges:  
10-18V, 18-36V or 36-75V
- Independent output voltage adjustment
- Remote On/Off Control and Sync pins
- Synchronous rectifier; No load operation
- 2" x 2" package; Industry standard pinout
- IEC950/UL1950/EN60950 certified
- CE mark available (75V<sub>IN</sub> models)
- Input under and overvoltage shutdown
- Output overvoltage protection
- Thermal shutdown
- Fully Isolated (1500Vdc)

The DLV (Dual Low Voltage) Series from DATEL provides both digital I/O and core logic supply voltages from a single 2" x 2" industry-standard pinout, plastic package. The DLV-3.3/6-2.5/7 provides 3.3V @ 6 Amps and 2.5V @ 7 Amps, the DLV-3.3/6-1.8/7 provides 3.3V @ 6 Amps and 1.8V @ 7 Amps, and the DLV-2.5/7-2.5/7 provides 2.5V @ 7 Amps and 1.8V @ 7 Amps. All models are available with input ranges of 10 to 18V (-D12), 18 to 36V (-D24) or 36 to 75V (-D48).

Plug-in compatibility with a number of converters from other leading manufacturers is possible because DATEL offers these 30 Watt converters with the flexibility to add/remove the sync (pin 3) and higher-voltage trim (pin 5). Each output is independently regulated with its own control loop to provide  $\pm 1.0\%$  line and load regulation. Fully synchronous output topology allows no load operation and high efficiencies. Models are available with either positive or negative on/off control and independent output voltage adjustment. "I" suffix models offer independent, "higher-voltage" on/off control for proper power sequencing of core and I/O voltages. Both outputs are internally synchronized to eliminate asynchronous beat frequencies.

All models include input Pi filtering, input overvoltage and undervoltage shutdown circuitry, output overvoltage protection, output short-circuit and current limiting protection and thermal shutdown. These devices meet IEC950, UL1950 and EN6950 safety standards. CB reports are available on request. "-D48" models are CE marked (meet LVD requirements).

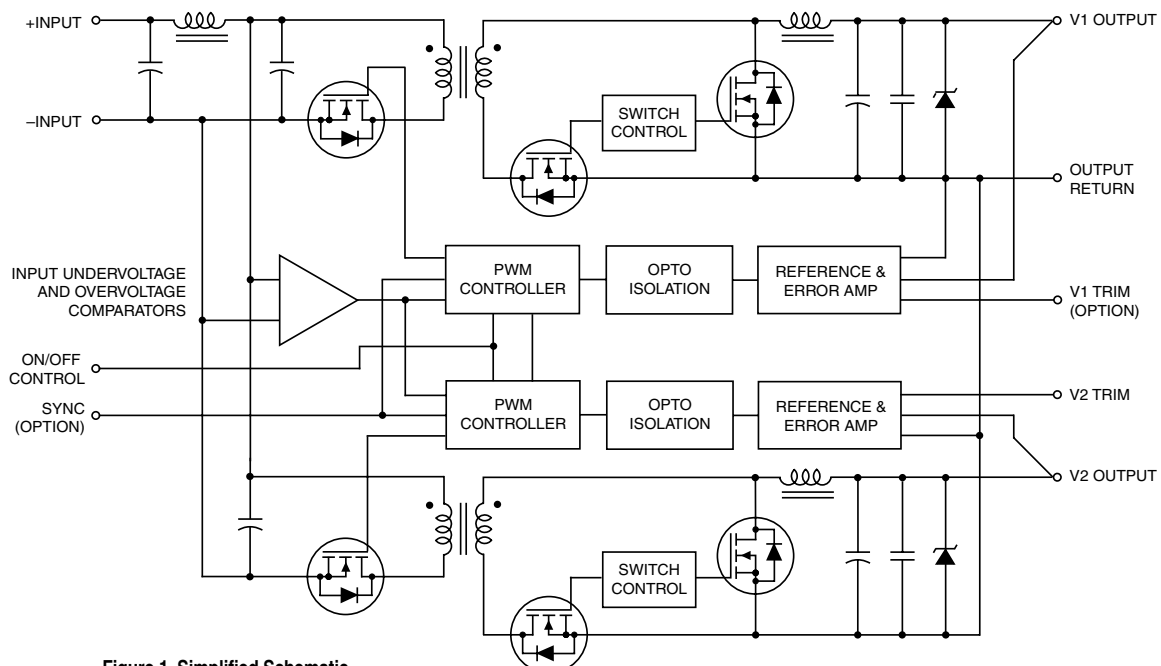


Figure 1. Simplified Schematic

**Performance Specifications and Ordering Guide <sup>①</sup>**

Model	Output						Input			Efficiency		Package (Case, Pinout)
	V <sub>OUT</sub> (Volts)	I <sub>OUT</sub> <sup>②</sup> (Amps)	R/N (mVp-p) <sup>③</sup>		Regulation (Max.)		V <sub>IN</sub> Nom. (Volts)	Range (Volts)	I <sub>IN</sub> <sup>⑤</sup> (mA)	Min.	Typ.	
			Typ.	Max.	Line	Load <sup>④</sup>						
DLV-2.5/7-1.8/7-D12	2.5	7	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-2.5/7-1.8/7-D24	2.5	7	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-2.5/7-1.8/7-D48	2.5	7	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P48
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-1.8/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P47
	1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	85%	C26, P40
	2.5	7	75	TBD	±1%	±1%						

① Typical at T<sub>A</sub> = +25°C under nominal line voltage and "balanced," full-power conditions: 3.3V @ 4.5A/2.5V @ 6A; 3.3V @ 5.2A/1.8V @ 7A; 2.5V @ 7A/1.8V @ 7A.  
 ② Any combination of rated I<sub>OUT</sub> current, not to exceed 30 Watts of output power. (See derating graphs.)

③ Ripple/Noise (R/N) measured over a 20MHz bandwidth. All models are specified with TBD ceramic capacitors.  
 ④ Tested from no load to 100% load (other output at no load).  
 ⑤ Nominal line voltage, no load/balanced full-power condition.

**PART NUMBER STRUCTURE**

**DLV - 3.3 / 6 - 2.5 / 7 - D48 T S N I**

Dual Low Voltage/  
Mixed-Voltage Series

V<sub>1</sub> Nominal Output Voltage

I<sub>1</sub> Maximum Output Current

V<sub>2</sub> Nominal Output Voltage

Add T, S, N and I suffixes as desired

Input Voltage Range:

D12 = 10-18 Volts (12V nominal)

D24 = 18-36 Volts (24V nominal)

D48 = 36-75 Volts (48V nominal)

I<sub>2</sub> Maximum Output Current

See page 5 for ordering information.

**Part Number Suffixes**

Standard DLV DC/DC's provide a Trim function (Pin 9) for the lower of the two output voltages. A Trim pin (Pin 5) for the higher voltage can be added by indicating a "T" suffix. A Sync pin can also be added and is indicated by an "S" suffix. An "N" suffix indicates that the On/Off Control function incorporates negative polarity logic. An "I" suffix provides independent on/off control (Pin 4) for the higher output voltage.

**No Suffix** Pins 3 & 5 not installed, positive polarity On/Off Control


**T Suffix** Pin 5 added for higher voltage Trim option

**S Suffix** Pin 3 added for Sync Option

**N Suffix** Negative polarity On/Off Control

**I Suffix** Pin 4 independent on/off control of Pin 6 output voltage

**M E C A N I C A L S P E C I F I C A T I O N S**

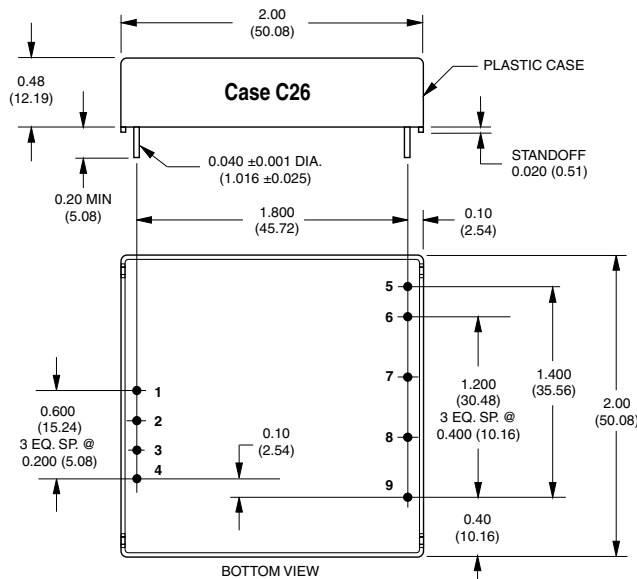

I/O Connections			
Pin	Function P40	Function P47	Function P48
1	+Input	+Input	+Input
2	-Input	-Input	-Input
3	Sync*	Sync*	Sync*
4	On/Off Control	On/Off Control	On/Off Control
5	+3.3V Trim*	+3.3V Trim*	+2.5V Trim*
6	+3.3V Output	+3.3V Output	+2.5V Output
7	Output Return	Output Return	Output Return
8	+2.5V Output	+1.8V Output	+1.8V Output
9	+2.5V Trim	+1.8V Trim	+1.8V Trim

\* Optional pins

**Performance/Functional Specifications**

Typical @ T<sub>A</sub> = +25°C under nominal line voltage, balanced "full-load" conditions, unless noted. ①

Input	
<b>Input Voltage Range:</b>	
D12 Models	10-18 Volts (12V nominal)
D24 Models	18-36 Volts (24V nominal)
D48 Models	36-75 Volts (48V nominal)
<b>Overvoltage Shutdown:</b>	
D12 Models	19-23 Volts (21V nominal)
D24 Models	37-42 Volts (40V nominal)
D48 Models	77-81 Volts (79V nominal)
<b>Start-Up Threshold:</b>	
D12 Models	9-10 Volts (9.3V nominal)
D24 Models	16.5-18 Volts (17V nominal)
D48 Models	34.5-36 Volts (35V nominal)
<b>Undervoltage Shutdown:</b>	
D12 Models	8.5-9.6 Volts (9.3V nominal)
D24 Models	16-17 Volts (16.5V nominal)
D48 Models	33-35 Volts (34V nominal)
<b>Input Current:</b>	
Normal Operating Conditions	See Ordering Guide
Standby Mode:	
Off, OV, UV, Thermal Shutdown	10mA typical
<b>Input Reflected Ripple Current:</b>	
Source Impedance	
D12 Models	TBD
D24 Models	TBD
D48 Models	TBD
<b>Internal Input Filter Type</b>	Pi (0.039µF - 2.2µH - TBD)
<b>Reverse-Polarity Protection:</b>	
D12 Models	TBD minute duration, 6A maximum
D24 Models	TBD minute duration, 4A maximum
D48 Models	TBD minute duration, 2A maximum
<b>On/Off Control (Pin 4):</b> ③ ④ ⑥	
D12, D24, D48 Models	On = open or TBD to +V <sub>IN</sub> , I <sub>IN</sub> = TBDµA @ TBDV Off = 0-0.8V, I <sub>IN</sub> = TBD @ 0V
D12N, D24N, D48N Models	On = 0-0.8V, I <sub>IN</sub> = TBD @ 0V Off = open or TBD to +5.5V I <sub>IN</sub> = TBDµA @ TBDV
<b>Sync (Option, Pin 3):</b> ③ ④	
Input Threshold (Rising Edge Active)	1-2.7 Volts
Input Voltage Low	0-0.9 Volts
Input Voltage High	2.8-5 Volts
Input Resistance	35kΩ minimum
Output High Voltage (100µA load)	3.5-4.8 Volts
Output Drive Current	35mA
Input/Output Pulse Width	160-360nsec
Output	
<b>V<sub>OUT</sub> Accuracy</b>	
2.5V/1.8V Models	1.5% / 2% maximum
3.3V/1.8V Models	1% / 2% maximum
3.3V/2.5V Models	1% / 1.5% maximum
<b>Minimum Loading Per Specification</b>	No load
<b>Ripple/Noise (20MHz BW)</b>	See Ordering Guide
<b>Line/Load Regulation</b>	See Ordering Guide
<b>Efficiency</b>	See Ordering Guide/Efficiency Curves
<b>Trim Range</b> ⑧	±5% each output
<b>Isolation Voltage:</b>	
Input-to-Output	1500Vdc
<b>Isolation Capacitance</b>	470pF
<b>Isolation Resistance</b>	100MΩ

Output (continued)	
<b>Isolation Resistance</b>	100MΩ
<b>Current Limit Inception:</b>	
2.5/1.8V Models	
2.5V @ 98%V <sub>OUT</sub>	TBD Amps
1.8V @ 98%V <sub>OUT</sub>	TBD Amps
3.3/1.8V Models	
3.3V @ 98.5%V <sub>OUT</sub>	TBD Amps
1.8V @ 98%V <sub>OUT</sub>	TBD Amps
3.3V/2.5V Models	
3.3V @ 98.5%V <sub>OUT</sub>	TBD Amps
2.5V @ 98%V <sub>OUT</sub>	TBD Amps
<b>Short Circuit Current:</b>	
3.3V Outputs	TBD Amps average, continuous
2.5V Outputs	TBD Amps average, continuous
1.8V Outputs	TBD Amps average, continuous
<b>Overvoltage Protection:</b>	Comparator, magnetic feedback
2.5/1.8V Models	TBD/TBD
3.3/1.8V Models	TBD/TBD
3.3/2.5V Models	TBD/TBD
<b>Maximum Capacitive Loading</b>	
2.5/1.8V Models	TBD/TBDµF
3.3/1.8V Models	TBD/TBDµF
3.3/2.5V Models	TBD/TBDµF
<b>Temperature Coefficient</b>	±0.02% per °C
Dynamic Characteristics	
<b>Dynamic Load Response:</b>	
2.5/1.8V Models	
2.5V (50-100% step to 1.5%V <sub>OUT</sub> )	TBD µsec maximum
1.8V (50-100% step to 2%V <sub>OUT</sub> )	TBD µsec maximum
3.3/1.8V Models	
3.3V (50-100% step to 1%V <sub>OUT</sub> )	TBD µsec maximum
1.8V (50-100% step to 2%V <sub>OUT</sub> )	TBD µsec maximum
3.3V/2.5V Models	
3.3V (50-100% step to 1%V <sub>OUT</sub> )	TBD µsec maximum
2.5V (50-100% step to 1.5%V <sub>OUT</sub> )	TBD µsec maximum
<b>Start-Up Time:</b>	
V <sub>IN</sub> to V <sub>OUT</sub>	TBD
On/Off to V <sub>OUT</sub>	TBD
<b>Switching Frequency</b>	225kHz (±TBD kHz)
Environmental	
<b>MTBF</b>	
D12 Models	TBD hours
D24 Models	TBD hours
D48 Models	TBD hours
<b>Operating Temperature (Ambient):</b>	
Without Derating:	
2.5/1.8V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
3.3/1.8V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
3.3V/2.5V Models	
D12 Model	TBD
D24 Model	TBD
D48 Model	TBD
With Derating	To +100°C (See Derating Curves)
<b>Case Temperature:</b>	
Maximum Operational	+100°C
For Thermal Shutdown	TBD minimum, TBD maximum
<b>Storage Temperature</b>	-40 to +120°C

Physical	
<b>Dimensions</b>	2" x 2" x 0.5" (50.8 x 50.8 x 12.7mm)
<b>Case Material</b>	Diallyl phthalate, UL94V-0 rated
<b>Pin Material</b>	Brass, solder coated
<b>Weight:</b>	TBD
<b>Primary to Secondary Insulation Level</b>	Operational

- ① All models are specified with external TBD ceramic output capacitors.
- ② See Technical Notes/Graphs for details.
- ③ Devices may be order with opposite polarity. Sync pin available with "S" suffix. See Part Number Suffixes and Technical Notes for details.
- ④ Applying a voltage to On/Off Control (pin 4) or the Sync (pin 3) when no input power is applied to the converter may cause permanent damage.
- ⑤ Output noise may be further reduced with the installation of additional external output capacitors. See Technical Notes.
- ⑥ On/Off control is designed to be driven with open collector or by appropriate voltage levels. Voltages must be referenced to the -Input (pin 2).
- ⑦ Demonstrated MTBF available on request.
- ⑧ Trim function for the higher of two voltages available with "T" suffix. See Part Number Suffixes and Technical Notes for details.

Absolute Maximum Ratings	
<b>Input Voltage:</b>	
Continuous:	D12 Models 23 Volts D2A Models 42 Volts D48 Models 81 Volts
Transient (100msec):	D12 Models 25 Volts D24 Models 50 Volts D48 Models 100 Volts
<b>Input Reverse-Polarity Protection</b> ② Input Current must be limited. TBD minute duration. Fusing recommended.	
D12A Models	6 Amps
D24A Models	4 Amps
D48A Models	2 Amps
<b>Output Current</b> ② Current limited. Devices can withstand an indefinite output short circuit.	
<b>On/Off Control (Pin 4) Max. Voltages</b> Referenced to -Input (pin 2)	
No Suffix	+VIN
"N" Suffix	+8 Volts
<b>Sync Control (Pin 3) Max. Voltages</b>	
"S" Suffix	+5.7 Volts
<b>Storage Temperature</b> -40 to +120°C	
<b>Lead Temperature (Soldering, 10 sec.)</b> +300°C	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied, nor recommended.	


**TECHNICAL NOTES**

**Trimming Output Voltages**


These DLV converters have a trim capability (pins 9 & 5) that allow users to independently adjust the output voltages ±5%. (Note: pin 5 is an option, see ordering information.) Adjustments to the output voltages can be accomplished via a trim pot, Figure 2, or a single fixed resistor as shown in Figures 3 and 4. A single fixed resistor can increase or decrease the output voltage depending on its connection. Fixed resistors should have absolute TCR's less than 100ppm/°C to minimize sensitivity to changes in temperature.

A single resistor connected from the Trim pin 9 to +Output (pin 8), see Figure 3, will decrease the lower output voltage. A resistor connected from Trim pin 9 to Output Return (pin 7) will increase the lower output voltage. See Figure 4.

Similarly, the higher output voltage can be adjusted using a single resistor connected from the Trim (pin 5) to +Output (pin 6) or to Output Return (pin 7). See Figures 3 and 4.

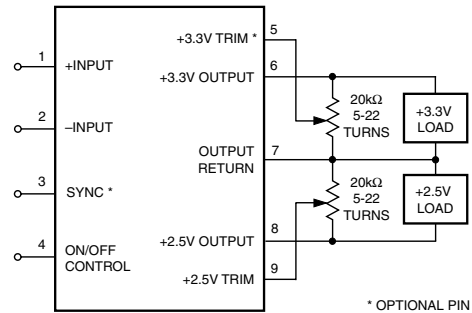

**Figure 2. Trim Connections Using A Trim Pot**

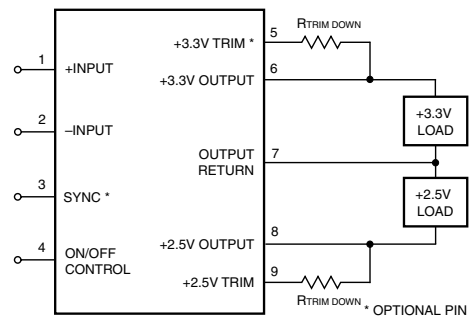

**Figure 3. Trim Connections To Decrease Output Voltages Using Fixed Resistors**

**3.3 Volt Trim Down**


$$R_{T\_DOWN} (k\Omega) = \left[ \frac{3.48(V_o - 1.577)}{3.3 - V_o} \right] - 28.7$$

**2.5 Volt Trim Down**

$$R_{T\_DOWN} (k\Omega) = \left[ \frac{2.41(V_o - 1.18)}{2.5 - V_o} \right] - 19.7$$

**1.8 Volt Trim Down**

$$R_{T\_DOWN} (k\Omega) = \left[ \frac{1.73(V_o - 0.86)}{1.8 - V_o} \right] - 14.17$$

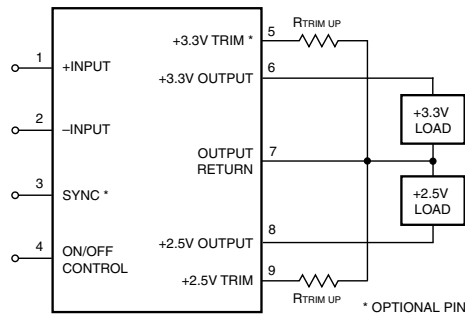

**3.3 Volt Trim Up**

$$R_{TUP} (k\Omega) = \left[ \frac{2.84}{V_o - 2.5} \right] - 19.7$$

**2.5 Volt Trim Up**

$$R_{TUP} (k\Omega) = \left[ \frac{5.88}{V_o - 3.3} \right] - 28.7$$

**1.8 Volt Trim Up**

$$R_{TUP} (k\Omega) = \left[ \frac{1.49}{V_o - 1.8} \right] - 14.17$$

Note: Resistor values are in kΩ. Accuracy of adjustment is subject to tolerances of resistors and factory-adjusted output accuracy.  $V_o$  = desired output voltage.

Figure 4. Trim Connections To Increase Output Voltages Using Fixed Resistors

PART NUMBER STRUCTURE

**DLV - 3.3 / 6 - 2.5 / 7 - D48 T S N I**

Dual Low Voltage/  
Mixed-Voltage Series

$V_1$  Nominal Output Voltage

$I_1$  Maximum Output Current

$V_2$  Nominal Output Voltage

Add T, S, N and I suffixes  
as desired

Input Voltage Range:

D12 = 10-18 Volts (12V nominal)

D24 = 18-36 Volts (24V nominal)

D48 = 36-75 Volts (48V nominal)

$I_2$  Maximum Output Current

Part Number Suffixes

Standard DLV DC/DC's provide a Trim function (Pin 9) for the lower of the two output voltages. A Trim pin (Pin 5) for the higher voltage can be added by indicating a "T" suffix. A Sync pin can also be added and is indicated by an "S" suffix. An "N" suffix indicates that the On/Off Control function incorporates negative polarity logic. An "I" suffix provides independent on/off control (Pin 4) for the higher output voltage.

- No Suffix** Pins 3 & 5 not installed, positive polarity On/Off Control
- T Suffix** Pin 5 added for higher voltage Trim option
- S Suffix** Pin 3 added for Sync Option
- N Suffix** Negative polarity On/Off Control
- I Suffix** Pin 4 independent on/off control of Pin 6 output voltage

Ordering Information

Higher Voltage Trim (Pin 5 Installed)	Sync Function (Pin 3 Installed)	Positive/Negative Logic	Control of "Higher" Output Voltage (Via Pin 4)	Independent On/Off Control, Both Outputs (Via Pin 4)	Suffix	
No	No	Positive	No	Yes	<b>No Suffix</b>	
			Yes	No	<b>I</b>	
		Negative	No	Yes	<b>N</b>	
			Yes	No	<b>NI</b>	
	Yes	Positive	No	Yes	<b>S</b>	
			Yes	No	<b>SI</b>	
Yes	No	Positive	No	Yes	<b>T</b>	
			Yes	No	<b>TI</b>	
			No	Yes	<b>TN</b>	
		Negative	Yes	No	<b>TNI</b>	
			Yes	Yes	Yes	<b>TS</b>
				No	No	<b>TSI</b>
	Yes	Positive	No	Yes	<b>TSN</b>	
			Yes	No	<b>TSNI</b>	
		Negative	No	Yes	<b>TSNI</b>	
			Yes	No	<b>TSNI</b>	



ISO 9001 REGISTERED

DS-0490 12/00

DATEL, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151  
Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356  
Internet: www.datel.com Email: sales@datel.com

DATEL (UK) LTD. Tadley, England Tel: (01256)-880444  
DATEL S.A.R.L. Montigny Le Bretonneux, France Tel: 01-34-60-01-01  
DATEL GmbH München, Germany Tel: 89-544334-0  
DATEL KK Tokyo, Japan Tel: 3-3779-1031, Osaka Tel: 6-6354-2025

DATEL makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. The DATEL logo is a registered DATEL, Inc. trademark.