

GaAs MMIC SMT DOUBLE-BALANCED MIXER 6 - 15 GHz

FEBRUARY 2001

v01.0300

Features

INPUT IP3: +21 dBm


CONVERSION LOSS: 8.5 dB

LO TO RF AND IF ISOLATION: 33 to 43 dB

SURFACE MOUNT, NO THRU HOLES

General Description

The HMC141C8 is a miniature passive double-balanced mixer in a non-hermetic ceramic surface mount package that can be used as an upconverter or downconverter. The device is a passive diode/balun type mixer with high dynamic range. The mixer can handle larger signal levels than most active mixers due to the high third order intercept of +21 dBm. MMIC implementation provides exceptional balance in the circuit resulting in high LO/RF and LO/IF isolations and unit-to-unit consistency. This mixer has applications in point-to-point microwave radios and VSAT ground equipment where small size and surface mount compatibility are important.

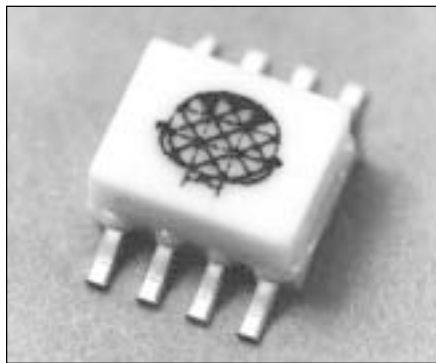

4

MIXERS

SMT

Guaranteed Performance With LO Drive of +15 dBm, -55 to +85 deg C


| Parameter | Min. | Typ. | Max. | Units |
|---|------|--------|------|-------|
| Frequency Range, RF & LO (Note 1) | | 6-15 | | GHz |
| Frequency Range, IF | | DC - 2 | | GHz |
| Conversion Loss | | 8.5 | 10 | dB |
| Noise Figure (SSB) | | 8.5 | 10 | dB |
| LO to RF Isolation | 28 | 35 | | dB |
| LO to IF Isolation | 17 | 25 | | dB |
| IP3 (Input) | | 20 | | dBm |
| IP2 (Input) | | 45 | | dBm |
| 1 dB Gain Compression (Input) | | 10 | | dBm |
| Local Oscillator Drive Level | 13 | 15 | 23 | dBm |
| Note 1: Conversion Loss and Isolation bandwidth degrades to 7-14 GHz with a lower LO drive of +13dBm. | | | | |

GaAs MMIC SMT DOUBLE-BALANCED MIXER 6 - 15 GHz


v01.0300

FEBRUARY 2001


Conversion Loss

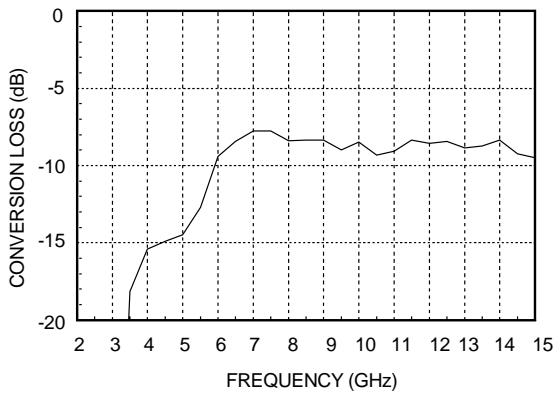


Isolation

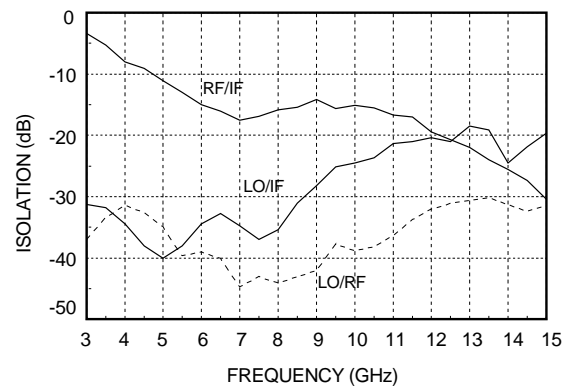


Conversion Loss vs. LO Drive Level

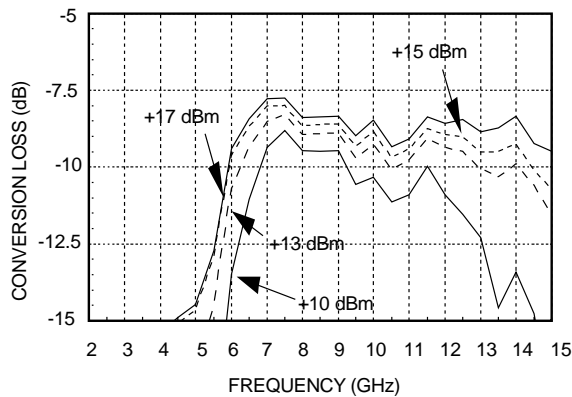

Isolation vs. LO Drive Level

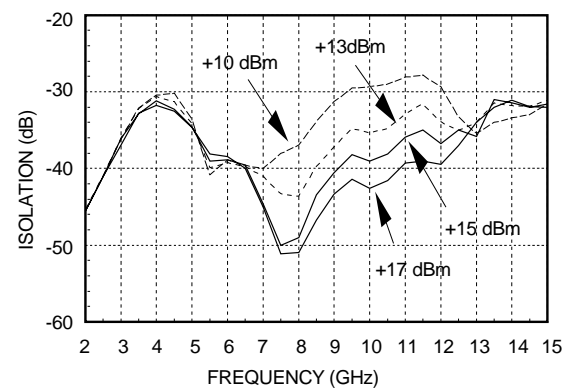

Return Loss

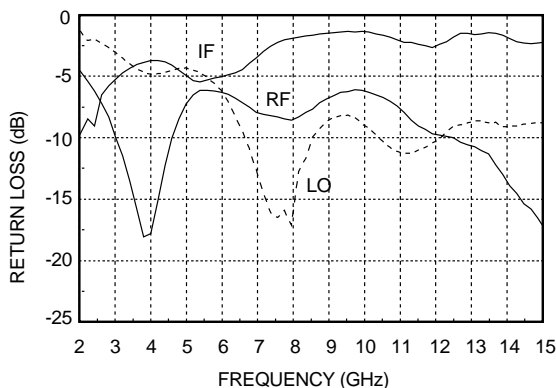

Distortion and 1dB Compression versus LO Drive Level


| LO Drive (dBm) | Distortion | | 1 dBm Compression (dBm) |
|----------------|------------|-----------|-------------------------|
| | IP3 (dBm) | IP2 (dBm) | |
| +13 | 18 | 42 | 7 |
| +15 | 21 | 45 | 10 |
| +17 | 21 | 45 | 10 |

GaAs MMIC SMT DOUBLE-BALANCED MIXER 6 - 15 GHz

FEBRUARY 2001

v01.0300

Schematic

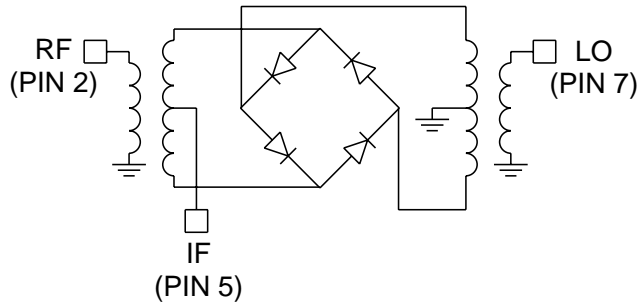


Absolute Maximum Ratings

| | |
|-----------------------|-------------------|
| RF/IF Input | +13dBm |
| LO Drive | +27dBm |
| Storage Temperature | -65 to +150 deg C |
| Operating Temperature | -55 to +85 deg C |

4
MIXERS
SMT

Outline Drawing

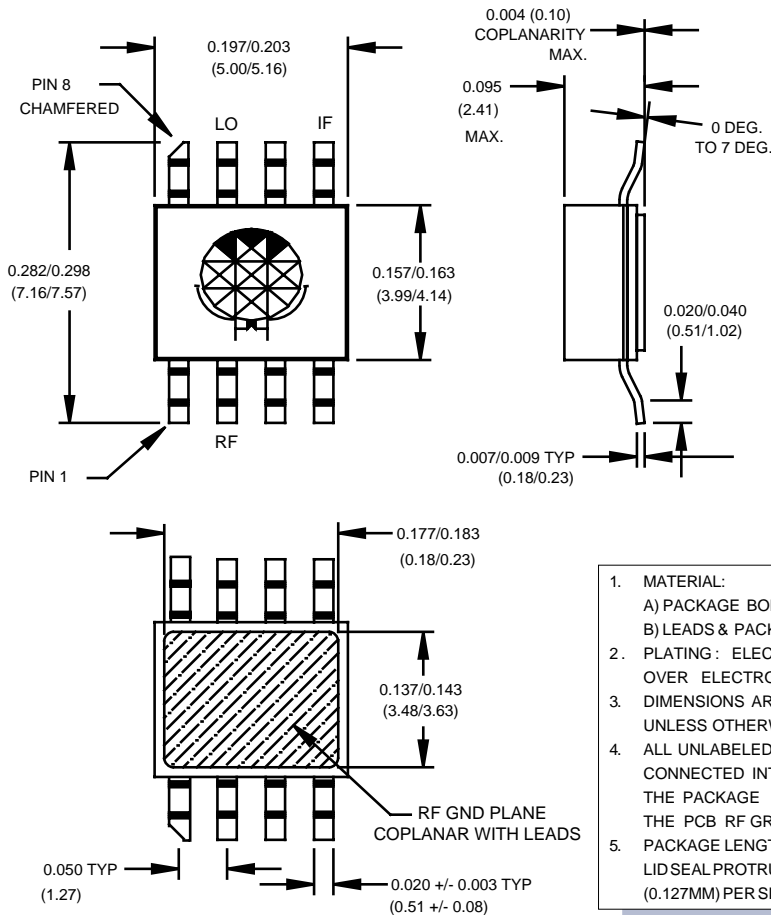

1. MATERIAL:
A) PACKAGE BODY & COVER : WHITE ALUMINA (92%)
B) LEADS & PACKAGE BOTTOM: COPPER
2. PLATING : ELECTROLYTIC GOLD 100 - 200 MICROINCHES OVER ELECTROLYTIC NICKEL 100 TO 200 MICROINCHES.
3. DIMENSIONS ARE IN INCHES (MILLIMETERS). UNLESS OTHERWISE SPECIFIED TOL. ARE $\pm 0.005(\pm 0.13)$.
4. ALL UNLABELED LEADS ARE GROUND. THESE LEADS ARE CONNECTED INTERNALLY TO THE PACKAGED BOTTOM GROUND. THE PACKAGE BOTTOM RF GROUND **MUST** BE SOLDERED TO THE PCB RF GROUND.
5. PACKAGE LENGTH AND WIDTH DIMENSIONS SHOWN DO NOT INCLUDE LID SEAL PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.005 (0.127MM) PER SIDE.

GaAs MMIC SMT DOUBLE-BALANCED MIXER 6 - 15 GHz

v01.0300

FEBRUARY 2001

NOTES:

4

MIXERS

SMT

