



**ISO - LOGIC BUFFER
SCHMITT TRIGGER
INTERRUPTER SWITCH**

DESCRIPTION


The ISTS200_ series of transmissive photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode coupled to a high speed integrated circuit detector. The output incorporates a Schmitt trigger which provides hysteresis for noise immunity and pulse shaping. The gap in the plastic housing provides a means of interrupting the signal with an opaque material, switching the output from an 'OFF' into an 'ON' state.

FEATURES

- Output high under incident light
- Built in Schmitt trigger circuit
- Pull up resistor between V_{CC} and output
- High sensitivity
- 3mm gap between LED and detector
- 0.25mm aperture over detector :-
ISTS2002, ISTS2003


APPLICATIONS

- Floppy disk drives, Copiers, Printers, Facsimilies, VCR's, Cassette tape Recorders, Automatic vending machines

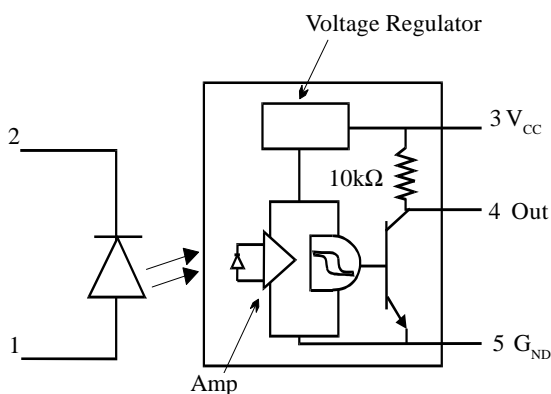


Dimensions in mm

**ISTS2001
ISTS2003**

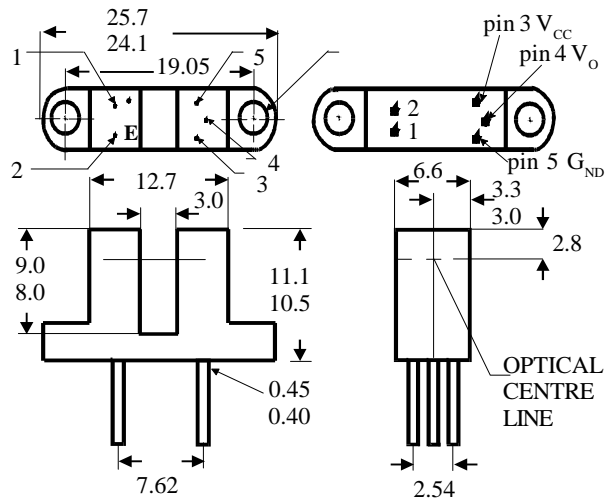

ISTS2002

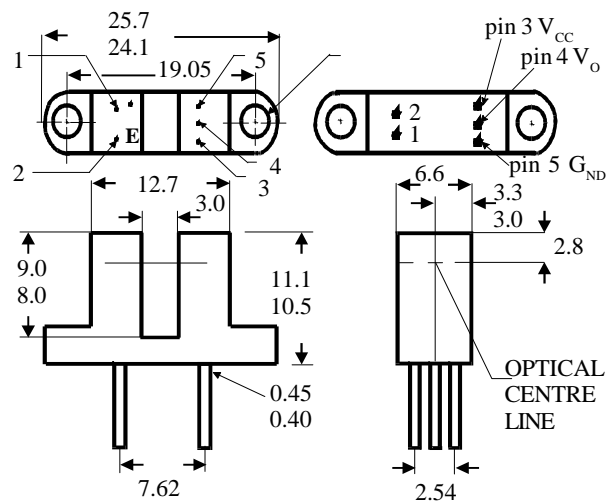

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax :(01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
http://www.isocom.com

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-40°C to +85°C
Operating Temperature	-25°C to +85°C
Lead Soldering Temperature (5 secs maximum)	260°C

INFRARED EMITTING DIODE

Power Dissipation	75 mW
Forward Current (Continuous)	50 mA
Forward Current (Peak) (Pulse Width ≤ 100μs, Duty Ratio = 0.01)	1 A
Reverse Voltage	6V

PHOTO DETECTOR


Power Dissipation	250 mW
Output Current	50mA
Allowed Range V_{35}	0 to 17V

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.1	1.6	V	$I_F = 20\text{mA}$
	Reverse Voltage (V_R)	6			V	$I_R = 10\mu\text{A}$
	Reverse Current (I_R)			10	μA	$V_R = 3\text{V}$
Detector	Operating Voltage Range V_{CC}	4.5		16	V	
	Low Level Supply Current I_{CCL}	2		12	mA	$V_{CC} = 5\text{V}, I_F = 0\text{mA}$
		2		15	mA	$V_{CC} = 16\text{V}, I_F = 0\text{mA}$
	High Level Supply Current I_{CCH}	0.5		10	mA	$V_{CC} = 5\text{V}, I_F = I_{FT}$
		0.5		12	mA	$V_{CC} = 16\text{V}, I_F = I_{FT}$
	Low Level Output Voltage V_{OL}			0.4	V	$V_{CC} = 5\text{V}, I_F = 0\text{mA}$ $I_{OL} = 16\text{mA}$
	High Level Output Voltage V_{OH}	2.4			V	$V_{CC} = 4.75\text{V}, I_F = 20\text{mA}$ $I_{OH} = -800\mu\text{A}$
	Input Forward Threshold Current I_{FT} ISTS2001			10	mA	$V_{CC} = 5\text{V}, R_L = 390\Omega$
				20	mA	$V_{CC} = 5\text{V}, R_L = 390\Omega$
	Propagation Delay Time to Logic High at Output t_{PLH}		5		μs	$V_{CC} = 5\text{V}$ $I_F = I_{FT}$ $R_L = 390\Omega$
Propagation Delay Time to Logic Low at Output t_{PHL}		5		μs		
Rise Time t_r		0.1		μs		
Fall Time t_f		0.05		μs		

Note 1 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

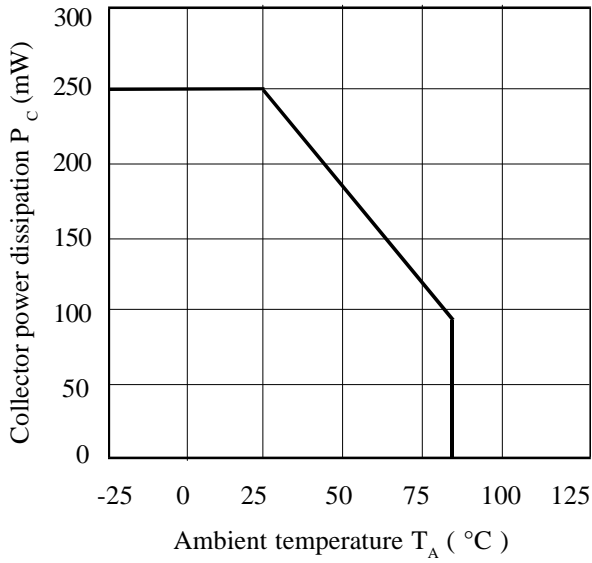


Low Level Output Voltage vs. Low Level Output Current

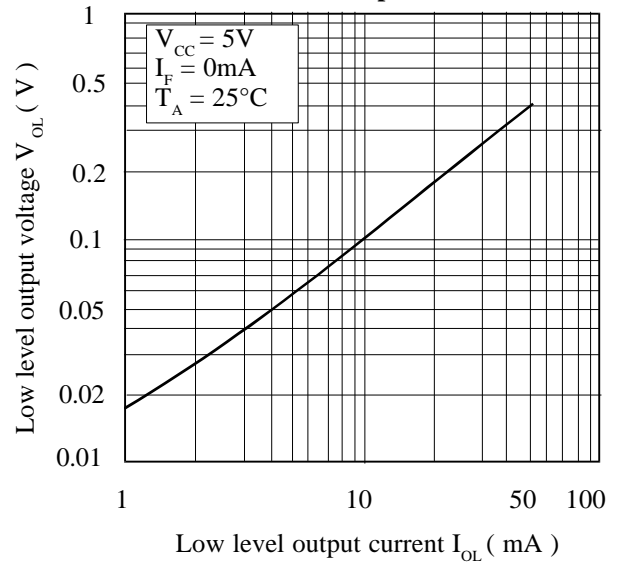


Forward Current vs. Ambient Temperature

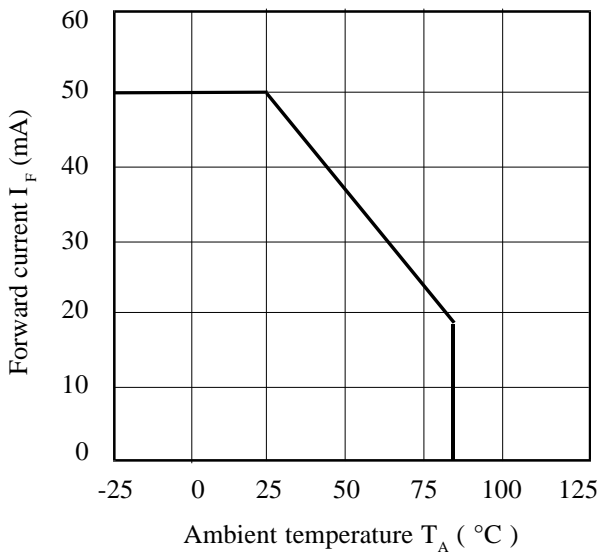

Rise Time, Fall Time vs. Load Resistance

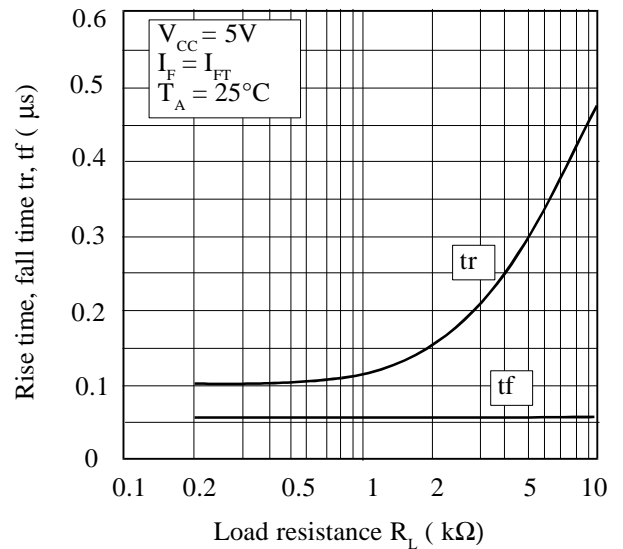

Supply Current vs. Ambient Temperature

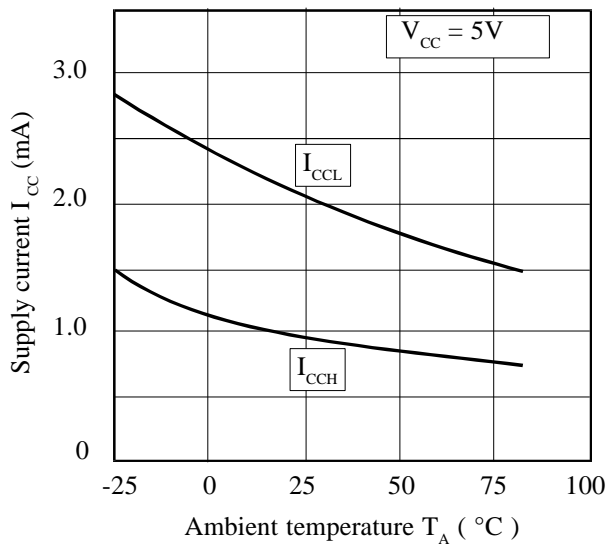

Low Level Output Voltage vs. Ambient Temperature

