


# ESAC87M-009 (16A)

(90V / 16A)

## SCHOTTKY BARRIER DIODE

### Outline drawings, mm

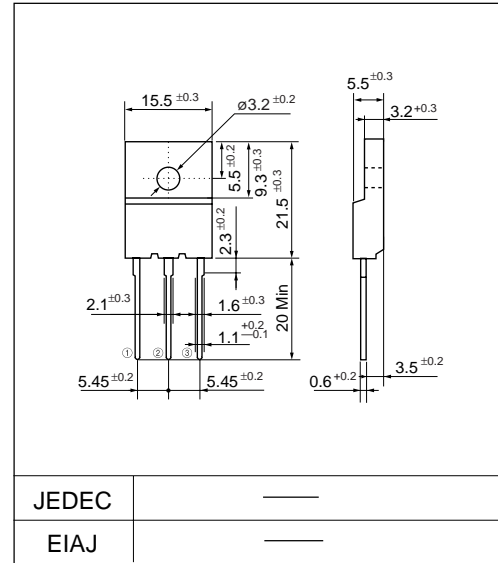

### Features

- Insulated package by fully molding
- Low  $V_F$
- Super high speed switching
- High reliability by planer design

### Applications

- High speed power switching

### Maximum ratings and characteristics

- Absolute maximum ratings


Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		90	V
Non-repetitive peak reverse voltage	$V_{RSM}$	$t_w=500\text{ns}$ , $\text{duty}=1/40$	100	V
Isolating voltage	$V_{iso}$	Terminals-to-case, AC. 1min.	1500	V
Average output current	$I_o$	Square wave, $\text{duty}=1/2$ $T_c=90^\circ\text{C}$	16*	A
Surge current	$I_{FSM}$	Sine wave 10ms	100	A
Operating junction temperature	$T_j$		-40 to +150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to +150	$^\circ\text{C}$

\* Average forward current of centertap full wave connection

- Electrical characteristics ( $T_a=25^\circ\text{C}$  Unless otherwise specified)


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_{FM}$	$I_{FM}=6\text{A}$	0.9	V
Reverse current	$I_{RRM}$	$V_R=V_{RRM}$	10	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.0	$^\circ\text{C}/\text{W}$

### Connection diagram

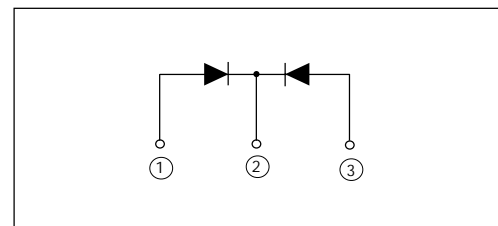


■ Characteristics


Forward characteristics

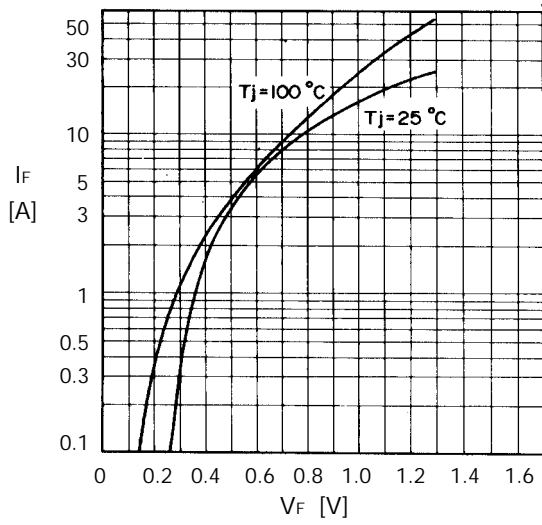


Reverse characteristics

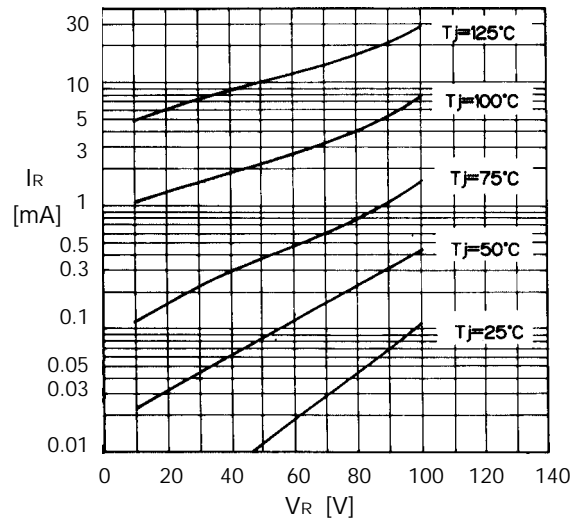


Forward power dissipation

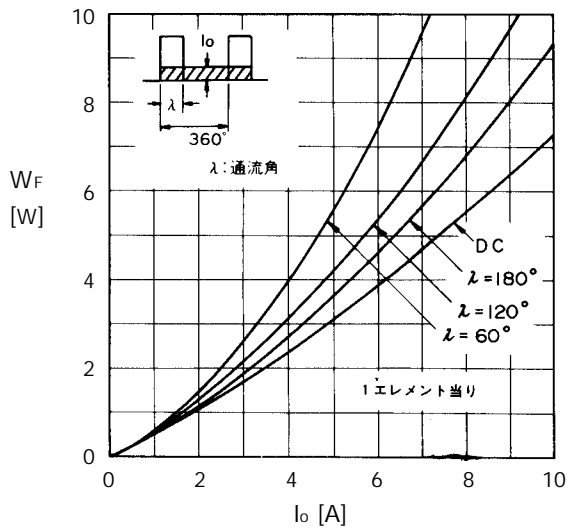


Reverse power dissipation

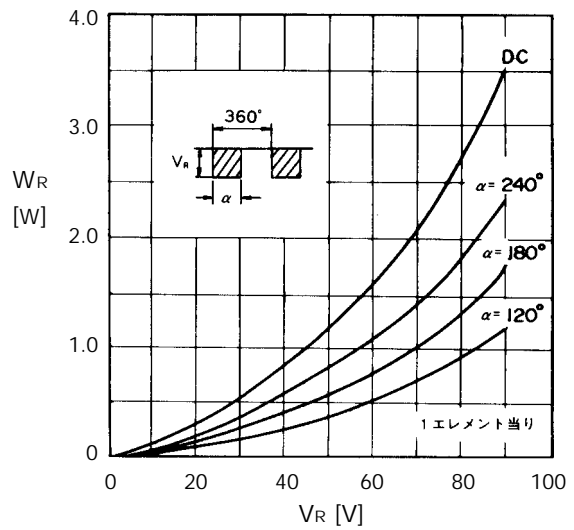


Output current-case temperature

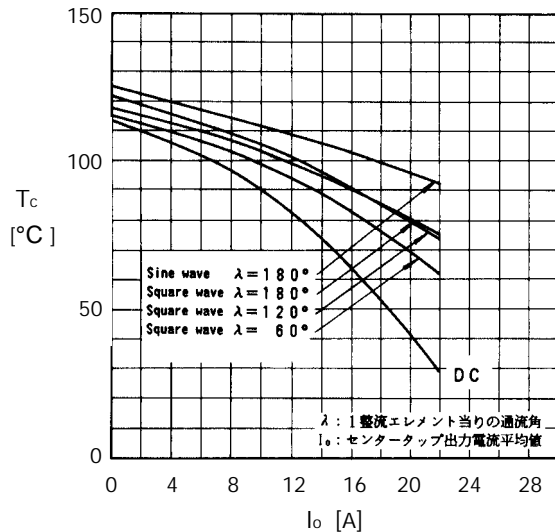

Junction capacitance characteristics

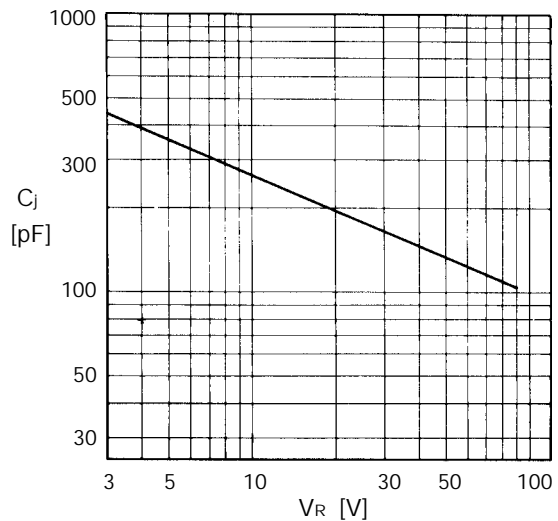

Surge capability

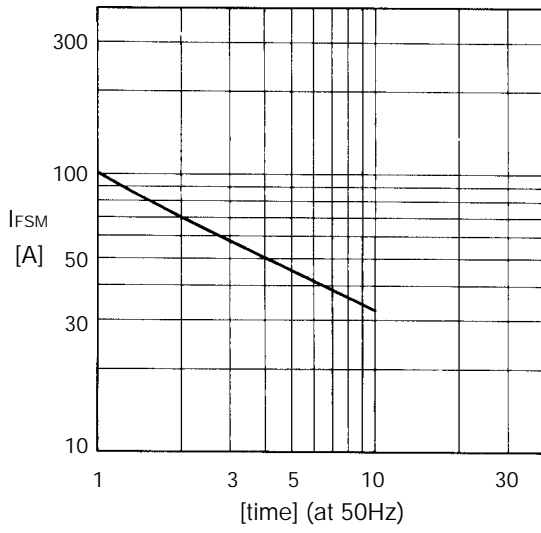

Transient thermal impedance

