

FEATURES

- 3kVDC Isolation (1 minute)
- Single or Dual Output
- Industry Standard Pinout
- Power Sharing on Dual Output
- Efficiency to 80%
- Power Density up to 0.90W/cm³
- 24V & 48V Input
- 5V, 9V, 12V and 15V Output
- Footprint from 1.17cm²
- UL 94V-0 Package Material
- No Heatsink Required
- Internal SMD Construction
- Toroidal Magnetics
- Fully Encapsulated
- No External Components Required
- Custom Solutions Available
- No Electrolytic or Tantalum Capacitors

DESCRIPTION

The NMV Series offers single or dual output versions in the same size package as the popular NMA series. The higher isolation is particularly useful in control type applications where the standard 1kV is not sufficient.

SELECTION GUIDE

Order Code	Nominal Input Voltage (V)	Output Voltage (V)	Output Current (mA)	Load Regulation (Max) (%)	Ripple & Noise (Max) mV p-p	Efficiency (%)	Isolation Capacitance (pF)	MTTF ¹ (kHrs)	Package Style
NMV2405DA	24	5	200	15	150	70	33	201	DIP
NMV2409DA	24	9	111	10	150	80	40	185	
NMV2412DA	24	12	84	10	150	80	55	163	
NMV2415DA	24	15	67	10	150	80	70	136	
NMV2405SA	24	5	200	15	150	70	33	201	SIP
NMV2409SA	24	9	111	10	150	80	40	185	
NMV2412SA	24	12	84	10	150	80	55	163	
NMV2415SA	24	15	67	10	150	80	70	136	
NMV4805DA	48	5	200	15	150	70	48	213	DIP
NMV4809DA	48	9	111	10	150	70	59	194	
NMV4812DA	48	12	84	10	150	70	70	169	
NMV4815DA	48	15	67	10	150	70	81	140	
NMV4805SA	48	5	200	15	150	70	48	213	SIP
NMV4809SA	48	9	111	10	150	70	59	194	
NMV4812SA	48	12	84	10	150	70	70	169	
NMV4815SA	48	15	67	10	150	70	81	140	
NMV2405D	24	5	±100	15	150	80	45	194	DIP
NMV2409D	24	9	±55	10	150	70	52	166	
NMV2412D	24	12	±42	10	150	70	65	134	
NMV2415D	24	15	±33	10	150	70	70	101	
NMV2405S	24	5	±100	15	150	80	45	194	SIP
NMV2409S	24	9	±55	10	150	70	52	166	
NMV2412S	24	12	±42	10	150	70	65	134	
NMV2415S	24	15	±33	10	150	70	70	101	
NMV4805D	48	5	±100	15	150	70	45	205	DIP
NMV4809D	48	9	±55	10	150	70	58	175	
NMV4812D	48	12	±42	10	150	70	68	137	
NMV4815D	48	15	±33	10	150	70	75	102	
NMV4805S	48	5	±100	15	150	70	45	205	SIP
NMV4809S	48	9	±55	10	150	70	58	175	
NMV4812S	48	12	±42	10	150	70	68	137	
NMV4815S	48	15	±33	10	150	70	75	102	

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Voltage Range	Continuous operation, 24V input types	21.6	24	26.4	V
	Continuous operation, 48V input types	43.2	48	52.8	

OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Rated Power ²	T _A = 0°C to 70°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line Regulation	High V _{IN} to low V _{IN}			1.2	%/%

ABSOLUTE MAXIMUM RATINGS

Short-circuit duration ³	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V _{IN} , NMV24 types	28V
Input voltage V _{IN} , NMV48 types	54V

1 Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2 See derating curve

3 Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

NMV 24V & 48V SERIES

3kVDC Isolated 1W Single & Dual Output DC-DC Converters

ISOLATION CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Isolation Test Voltage	For 1 minute	3000			VDC
Resistance	Viso=1000VDC	1			G

GENERAL CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Switching Frequency	All input types		100		kHz

TEMPERATURE CHARACTERISTICS


Parameter	Conditions	MIN	TYP	MAX	Units
Specification	All output types	0		70	°C
Storage		-55		150	°C
Cooling	Free air convection				

PIN CONNECTIONS


Single Output Variants	14 Pin DIP	7 Pin SIP
	PIN	PIN
	1 GND	1 V _{IN}
	7 NC	2 GND
	8 +V	5 0V
	10 0V	7 +V
	14 V _{IN}	

Dual Output Variants	14 Pin DIP	7 Pin SIP
	PIN	PIN
	1 GND	1 V _{IN}
	7 NC	2 GND
	8 +V	5 -V
	9 0V	6 0V
	10 -V	7 +V
	14 V _{IN}	

PERFORMANCE CHARACTERISTICS

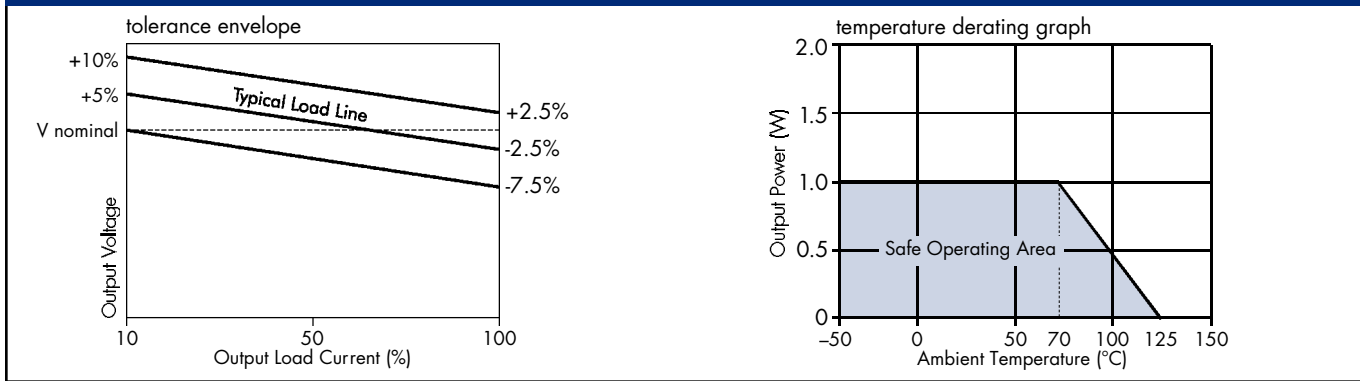

MECHANICAL DIMENSIONS

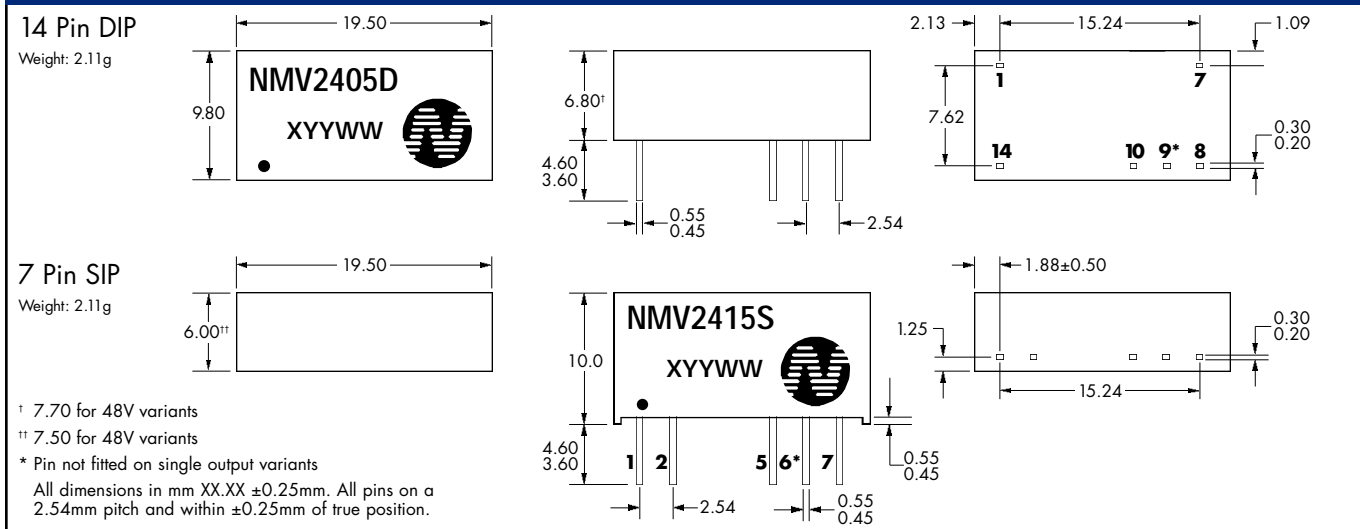

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2001

NDC NMV2.3

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited.

Instructions for use are available from www.dc-dc.com

C&D Technologies (NCL) Ltd
Tanners Drive, Blakelands North
Milton Keynes MK14 5BU, England
Tel: +44 (0)1908 615232
Fax: +44 (0)1908 617545
email: info@cdechno-ncl.com

[www: http://www.dc-dc.com](http://www.dc-dc.com)

C&D Technologies (NCL), Inc.
5816 Creedmoor Road, Raleigh
NC 27612, USA
Tel: +1 (919) 571-9405
Fax: +1 (919) 571-9262
email: info@us.cdechno-ncl.com

C&D TECHNOLOGIES
Power Solutions