

CLL457A
CLL459A

**SURFACE MOUNT
LOW LEAKAGE SILICON DIODE**



SOD-80 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL457A, CLL459A types are silicon planar diodes, manufactured in a hermetically sealed glass surface mount package, designed for low leakage applications.

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

	SYMBOL	CLL457A	CLL459A	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	70	200	V
Peak Working Reverse Voltage	V_{RWM}	60	175	V
Average Forward Current	I_O		200	mA
Forward Steady-State Current	I_F		500	mA
Peak Forward Surge Current (1.0 μ s pulse)	I_{FSM}		4.0	A
Power Dissipation	P_D		500	mW
Operating and Storage				
Junction Temperature	T_J, T_{stg}	-65 to +200		$^\circ\text{C}$
Thermal Resistance	Θ_{JA}	350		$^\circ\text{C/W}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	CLL457A		CLL459A		UNITS
		MIN	MAX	MIN	MAX	
BV_R	$I_R=100\mu\text{A}$	70		200		V
I_R	$V_R=\text{Rated } V_{RWM}$		25		25	nA
I_R	$V_R=\text{Rated } V_{RWM}, T_A=150^\circ\text{C}$		5.0		5.0	μA
V_F	$I_F=100\text{mA}$		1.0		1.0	V
C_T	$V_R=0, f=1.0\text{MHz}$		6.0		6.0	pF

R2 (21-August 2001)

**SURFACE MOUNT
LOW LEAKAGE SILICON
DIODE**

SOD-80 - MECHANICAL OUTLINE

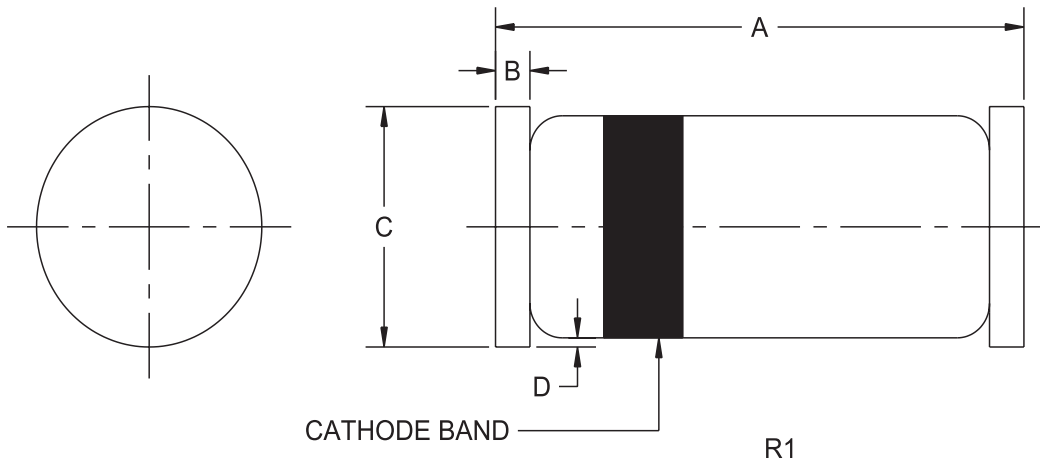

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.016		0.41	
C (DIA)	0.051	0.067	1.30	1.70
D	-	0.004	-	0.10

SOD-80 (REV:R1)

R2 (21-August 2001)