


**CMR1U-01**  
**CMR1U-02**  
**CMR1U-04**  
**CMR1U-06**  
**NEW! CMR1U-10**  
**ULTRA FAST RECOVERY RECTIFIER**  
**1.0 AMP, 100 THRU 1000 VOLTS**

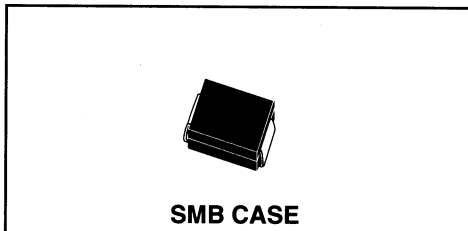

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

**FEATURES:**

- LOW COST
- SPECIAL SELECTIONS AVAILABLE
- HIGH RELIABILITY
- SUPERIOR LOT TO LOT CONSISTENCY
- GLASS PASSIVATED CHIP
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 1.0 Amp Surface Mount Silicon Ultra Fast Recovery Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 12mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.


**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

	SYMBOL	CMR1U-01	CMR1U-02	CMR1U-04	CMR1U-06	CMR1U-10	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	200	400	600	1000	V
DC Blocking Voltage	$V_R$	100	200	400	600	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	140	280	420	700	V
Average Forward Current ( $T_A=75^{\circ}\text{C}$ )	$I_O$			1.0			A
Peak Forward Surge Current (8.3ms)	$I_{FSM}$			30			A
Operating and Storage							
Junction Temperature	$T_J, T_{stg}$			-65 to +175			$^{\circ}\text{C}$
Thermal Resistance	$\theta_{JL}$			20			$^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_R$	$V_R = \text{Rated } V_{RRM}$		5.0	$\mu\text{A}$
$I_R$	$V_R = \text{Rated } V_{RRM}, T_A = 125^{\circ}\text{C}$		100	$\mu\text{A}$
$V_F$	$I_F = 1.0\text{A}, (\text{CMR1U-01, CMR1U-02})$		1.00	V
$V_F$	$I_F = 1.0\text{A}, (\text{CMR1U-04})$		1.25	V
$V_F$	$I_F = 1.0\text{A}, (\text{CMR1U-06})$		1.40	V
$V_F$	$I_F = 1.0\text{A}, (\text{CMR1U-10})$		1.70	V
$t_{rr}$	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, \text{Recover to } 0.25\text{A} (\text{CMR1U-01, -02, -04})$		50	ns
$t_{rr}$	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, \text{Recover to } 0.25\text{A} (\text{CMR1U-06, -10})$		100	ns

All dimensions in inches (mm).

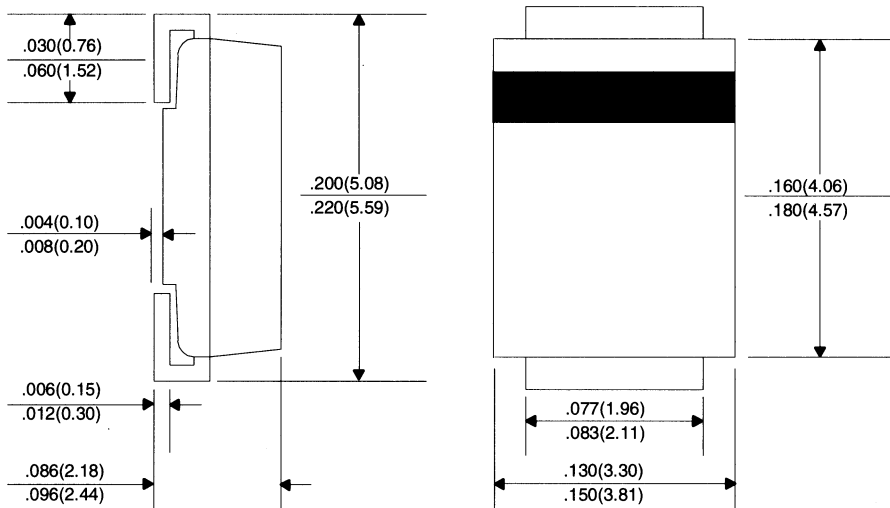

**Marking Codes:**

DEVICE	MARKING CODE
CMR1U-01	CU01
CMR1U-02	CU02
CMR1U-04	CU04
CMR1U-06	CU06
CMR1U-10	CU10

DATA SHEET

R1