




CSHD6-40C

SCHOTTKY RECTIFIER
DUAL,COMMON CATHODE
6.0 AMPS, 40 VOLTS

DPAK POWER!



DPAK CASE

MAXIMUM RATINGS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	UNITS
Peak Working Reverse Voltage	V_{RWM}	V
DC Blocking Voltage	V_R	V
Average Rectified Forward Current ($T_C=125^{\circ}\text{C}$) Per Diode	I_O	A
Average Rectified Forward Current ($T_C=125^{\circ}\text{C}$) Per Device	I_O	A
Peak Repetitive Forward Current ($T_C=125^{\circ}\text{C}$)	I_{FRM}	A
Peak Forward Surge Current	I_{FSM}	A
Peak Repetitive Reverse Surge Current ($t_p=2\ \mu\text{s}$)	I_{RRM}	A
Operating and Storage		
Junction Temperature	T_J, T_{stg}	$^{\circ}\text{C}$
Thermal Resistance, Per Diode	Θ_{JC}	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)



SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=40\text{V}$		100	μA
I_R	$V_R=40\text{V}, T_C=125^{\circ}\text{C}$		15	mA
V_F	$I_F=3.0\text{A}$	0.60		V
V_F	$I_F=3.0\text{A}, T_C=125^{\circ}\text{C}$	0.45		V
V_F	$I_F=6.0\text{A}$	0.70		V
V_F	$I_F=6.0\text{A}, T_C=125^{\circ}\text{C}$	0.625		V

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CSHD6-40C, Silicon Schottky Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer and automotive applications.

All dimensions in inches (mm).

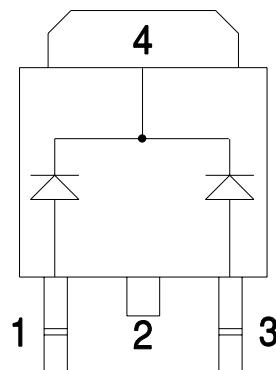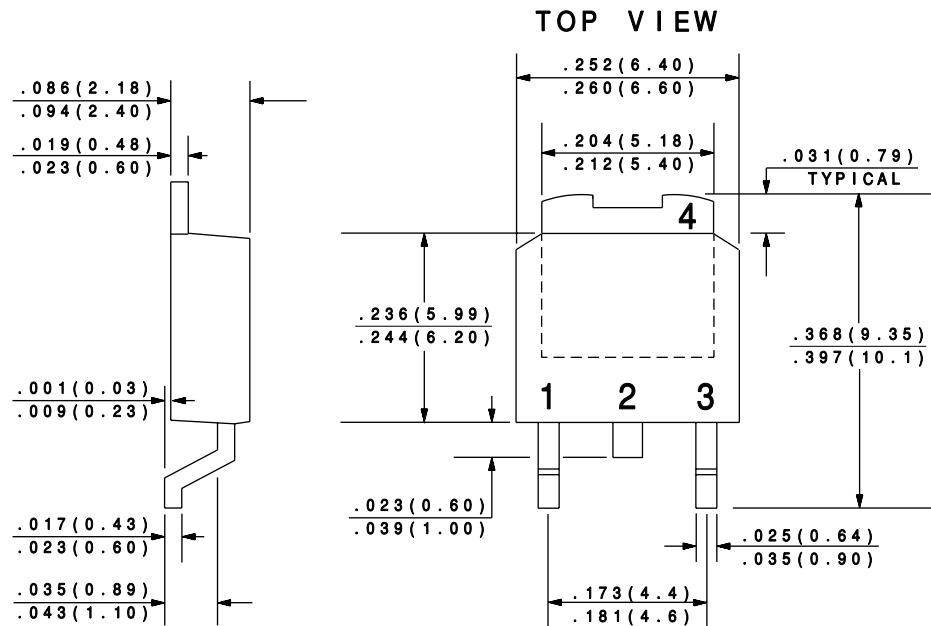

LEAD CODE:

- 1) ANODE #1
- 2) CATHODE
- 3) ANODE #2
- 4) CATHODE

PIN 2 IS COMMON TO THE TAB (4).

R1