

## 3-INPUT VIDEO SWITCH

### ■ GENERAL DESCRIPTION

The NJM2249 is 3-input video switch for video and audio signal. One input terminals has sink-chip clamp function and so it is applied to fixed DC level of video signal. Two other input terminals are transistor base input for luminant signal and so luminant level may be easily fixed by outer circuit. Its operating supply voltage range is 4.75 to 13V and bandwidth is 10MHz. Cross-talk is 70dB (at 4.43MHz).


### ■ FEATURES

- Operating Voltage ( $V^+ = +4.75V \sim +13V$ )
- 3 Input-1 Output
- Internal Clamp Function ( $V_{IN1}$ )
- Internal Luminance Signal Control Function ( $V_{IN2}, V_{IN3}$ )
- Cross-talk 70dB(at 4.43MHz)
- Wide Frequency Range
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology


### ■ APPLICATION

- VCR, Video Camera, AV-TV, Video Disc Player

### ■ PIN CONFIGURATION




NJM2249D  
NJM2249M  
NJM2249V



NJM2249L

PIN FUNCTION	
1.	$V_{IN1}$
2.	SW1
3.	$V_{IN2}$
4.	SW2
5.	$V_{IN3}$
6.	$V^+$
7.	$V_{OUT}$
8.	GND

### ■ BLOCK DIAGRAM

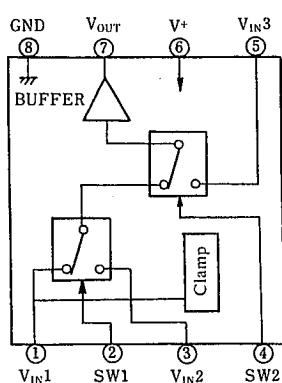

### ■ INPUT CONTROL SIGNAL-OUTPUT SIGNAL

SW 1	SW 2	OUTPUT SIGNAL
L	L	$V_{IN1}$
H	L	$V_{IN2}$
L/H	H	$V_{IN3}$

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	15	V
Power Dissipation	P <sub>D</sub>	(DIP8) 500 (DMP8) 300 (SSOP8) 250 (SIP8) 800	mW mW mW mW
Operating Temperature Range	T <sub>opr</sub>	-20~+75	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

## ■ ELECTRICAL CHARACTERISTICS:

(V<sup>+</sup>=5V, Ta=25°C)

PARAMETERS	SYMBOLS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Recommended Supply Voltage	V <sup>+</sup>		4.75	—	13.0	V
Operating Current	I <sub>CC</sub>	S1=S2=S3=S4=S5=1	—	10.5	13.0	mA
Voltage Gain	G <sub>V</sub>	V <sub>I</sub> =2.5V <sub>p-p</sub> , 100kHz, V <sub>O</sub> /V <sub>I</sub>	-0.5	—	+0.5	dB
Frequency Characteristics	G <sub>f</sub>	V <sub>I</sub> =2.0V <sub>p-p</sub> , V <sub>O</sub> (10MHz)/V <sub>O</sub> (100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V <sub>I</sub> =2V <sub>p-p</sub> , Staircase Signal	—	0	—	%
Differential Phase	DP	V <sub>I</sub> =2V <sub>p-p</sub> , Staircase Signal	—	0	—	deg
Cross-talk	CT	V <sub>I</sub> =2.0V <sub>p-p</sub> , 4.43MHz, V <sub>O</sub> /V <sub>I</sub> (note 1)	—	-70	—	dB
Switch Change Voltage	V <sub>CH</sub>	All inside SW: ON	2.4	—	—	V
	V <sub>CL</sub>	All inside SW: OFF	—	—	0.8	V
Output Impedance	R <sub>O</sub>		—	10	—	Ω

(Note 1) : Tested on all combination except three below.

- a) S1=2, S4=S5=1   b) S2=2, S4=2, S5=1   c) S3=2, S5=2

(Note2) : Unless specified, tested with V<sub>BIAIS1</sub>=V<sub>BIAIS2</sub>=3V.


(Note3) : If it is not shown about switch condition, it is tested on three condition below.

- a) S1=2, S2=S3=S4=S5=1   b) S1=1, S2=2, S3=1, S4=2, S5=1   c) S1=S2=1, S3=2, S4=1 or 2, S5=2


(Note4) : V<sub>IN1</sub> clamp voltage is about 2/5 of supply voltage (about 2.0V if V<sup>+</sup>=5V).

## ■ TEST CIRCUIT

## ■ SPECIAL CARES TO BE TAKEN WHEN APPLICATION

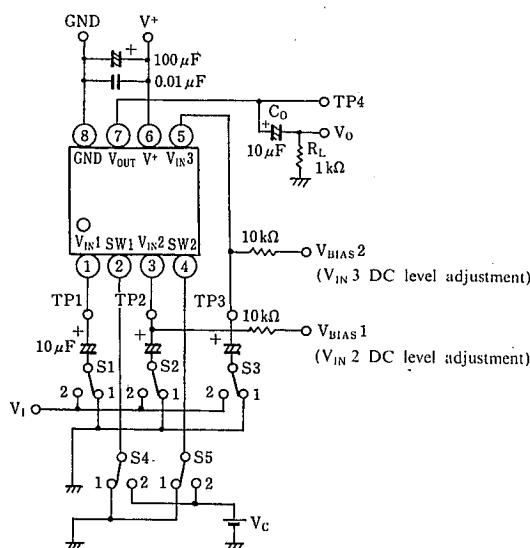

This IC requires 1MΩ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

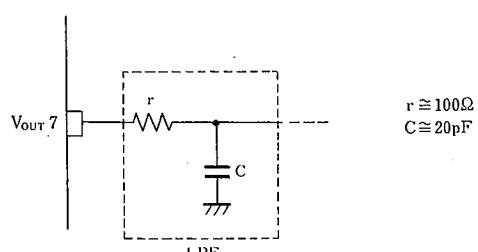

## ■ TERMINAL FUNCTION

PIN NO.	PIN SYMBOL	EQUIVALENT CIRCUIT	PIN NO.	PIN SYMBOL	EQUIVALENT CIRCUIT
1	V <sub>IN</sub> 1		5	V <sub>IN</sub> 3	
2	SW1		6	V <sup>+</sup>	
3	V <sub>IN</sub> 2		7	V <sub>OUT</sub>	
4	SW2		8	GND	

## MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.