

### CHROMA SIGNAL HUE TINT CONTROLLER

#### **■ GENERAL DESCRIPTION**

NJM2255 is a Chroma signal Hue, Tint controller IC, to be used for VCR, LCD & AV equipments.

In play back operation of video signals of VCRs, Hue and Tint of Chroma signal can be adjusted independently and continuousely by the external DC voltage. NJM2255 internalizes the variable capacitor in it, so that it can be operated with minimal external components.

#### **■ PACKAGE OUTLINE**



NJM2255D


#### **■ FEATURES**

- Operating Voltage (+4.7V ~+5.3V)
- · Internalizing variable capacitor
- Internalizing changeable Gain Amplifier
- Hue and Tint of Chroma signals can be adjusted continuousely by DC voltage (0V 5V)
- Internalizing Dead Band Circuit
- Package Outline DIP8
- Bipolar Technology

#### **APPLICATIONS**


• VCR, LCD, AV equipments

#### **■ BLOCK DIAGRAM**

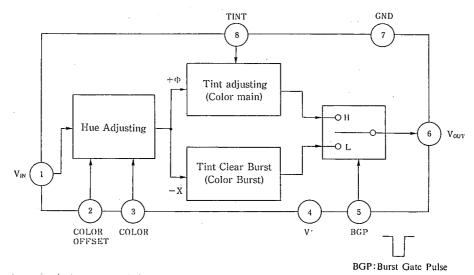

#### **■ CONTROL INPUT - OUTPUT SIGNAL**

SWI	output Signal
Н	Color Main
L	Color Burst

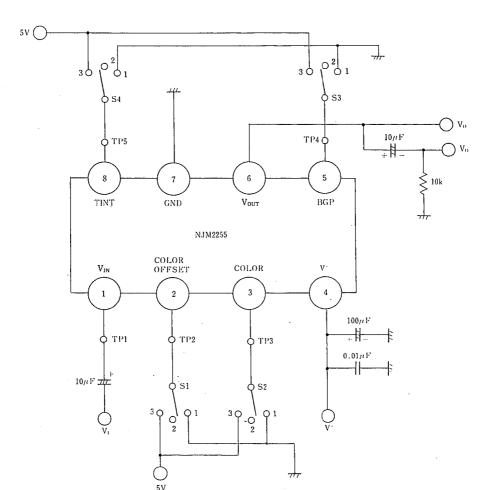

### ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT	
Supply Voltage	V*	7	V	
Power Dissipation	PD	500 .	mW	
Operating Temperature Range	Topr	-20~+75	r	
Storage Temperature Range	Tstg	-40~+125	°C	


## ■ ELECTRICAL CHARACTERISTICS


(V<sup>+</sup>=5V, Ta=25℃)


PARAMETER	SYMBOL	SWITCH				mrem covinimov		TIVD	MAY	UNUT
		SI	S2	S3	S4	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	lcc	2	2	2	2	No signal	_	22.0	28.0	mA
Voltage Gain 1	GC	2	2	3	2	V <sub>OUT</sub> /V <sub>in</sub>	-1.0	0	1.0	dB
Voltage Gain 2	GB	2	2	1	2	V <sub>OUT</sub> /V <sub>IN</sub>	0.1	0	1.0	dB
Hue Offset	TI	2	2		2	S3=1/3 V <sub>OUT</sub> Phase difference	-3.5	0	3.5	deg
Hue Changeable width 1	T2	2	3		2	S3=1/3V <sub>OUT</sub> Phase difference	20	22		deg
Hue Changeable width 2	T3	2	1		2	S3=1/3 V <sub>OUT</sub> Phase difference		-22	-20	deg
Tint Changeable width 1	GC	2	2		2	Gain (S3=3)—Gain (S3=1)	-0.6	0	0.6	dB
Tint Changeable width 2	GB	2	2		3	Gain (S3=3)-Gain (S3=1)	4.5	5.5		dB
Tint Changeable width 3	TI	2	2		] [	Gain (S3=3)—Gain (S3=1)			20	dB
Hue Offset Adjustment width I	OSTH	3	2		2	S3=1/3 V <sub>OUT</sub>		—	-3.5	deg
Hue Offset Adjustment width 2	OSTL	1	2		2	S3=1/3 V <sub>OUT</sub>	3.5	l —	—	deg
BGP Threashold Voltage !	VTHH	2	2	3	2	Switch on level	2.2		5.0	V
BGP Threashold Voltage 2	VTHL	2	2	3	2	Switch off level	0	—	0.8	ν
Secondary Distortion 1	HC	2	2	3	2	3.58MHz, 700mV <sub>P-P</sub> Sine Wave	—	-37	-33	dB
Secondary Distortion 2	НВ	2	2	i	2	3.58MHz, 700mV <sub>P-P</sub> Sine Wave		-37	-33	dB

Note Unless otherwise specified, input signal is 3.58MHz and 300mV<sub>P-P</sub> sine wave.

### **TYPICAL CHARACTERISTICS**

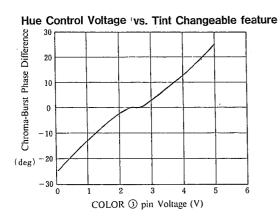

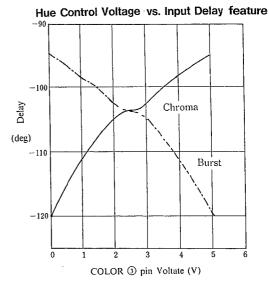

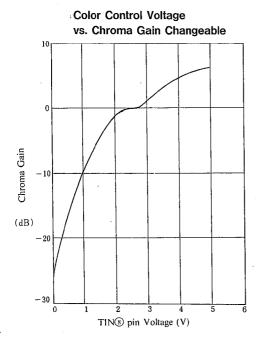

# NJM2255

# **MEMO**

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.