

**CMDZ2L4 THRU CMDZ36L**  
**SUPERmini™**  
**LOW LEVEL ZENER DIODE**  
**250mW, 2.4 VOLTS THRU 36 VOLTS**

**SUPERmini™**  
  
**SOD-323 CASE**

**Central™**  
**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMDZ2L4 Series Silicon Low Level Zener Diode is a high quality voltage regulator, manufactured in a SUPERmini™ surface mount package, designed for applications requiring a low operating current, low leakage, and a sharp knee.

**ABSOLUTE MAXIMUM RATINGS:**

Power Dissipation (@ $T_A=25^\circ\text{C}$ )  
Operating and Storage Temperature  
Thermal Resistance

**SYMBOL**

$P_D$  250  
 $T_J, T_{stg}$  -65 to +150  
 $\theta_{JA}$  500

**UNIT**

mW  
 $^\circ\text{C}$   
 $^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$ )**


TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE CURRENT		MARKING CODE
	MIN	NOM	MAX	$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		
	VOLTS	VOLTS	VOLTS	$\mu\text{A}$	$\Omega$	$\mu\text{A}$	VOLTS	
CMDZ2L4	2.280	2.4	2.520	500	900	25	1.0	AP
CMDZ2L5	2.375	2.5	2.625	500	900	10	1.0	BP
CMDZ2L7	2.565	2.7	2.835	500	900	10	1.0	CP
CMDZ2L8	2.660	2.8	2.940	500	900	10	1.0	DP
CMDZ3L0	2.850	3.0	3.150	500	900	5.0	1.0	EP
CMDZ3L3	3.135	3.3	3.465	500	900	5.0	1.0	FP
CMDZ3L6	3.420	3.6	3.780	500	900	5.0	1.0	GP
CMDZ3L9	3.705	3.9	4.095	500	900	5.0	1.0	HP
CMDZ4L3	4.085	4.3	4.515	500	900	5.0	1.0	JP
CMDZ4L7	4.465	4.7	4.935	500	750	1.0	1.5	KP
CMDZ5L1	4.84	5.1	5.37	500	350	1.0	1.5	LP
CMDZ5L6	5.31	5.6	5.92	500	325	1.0	2.0	NP
CMDZ6L2	5.86	6.2	6.53	500	90	1.0	2.0	OP
CMDZ6L8	6.47	6.8	7.14	500	60	1.0	3.5	PP
CMDZ7L5	7.06	7.5	7.84	500	60	1.0	3.5	QP
CMDZ8L2	7.76	8.2	8.64	500	60	1.0	6.0	RP
CMDZ9L1	8.56	9.1	9.55	500	60	1.0	6.0	SP
CMDZ10L	9.45	10	10.55	500	80	1.0	8.0	TP
CMDZ11L	10.44	11	11.56	500	80	1.0	8.0	UP
CMDZ12L	11.42	12	12.60	500	80	1.0	10.5	VP
CMDZ13L	12.47	13	13.96	500	80	1.0	10.5	XP
CMDZ15L	13.84	15	15.52	500	80	1.0	11.5	YP
CMDZ16L	15.37	16	17.09	500	80	1.0	14	ZP
CMDZ18L	16.94	18	19.03	500	80	1.0	16	1P
CMDZ20L	18.86	20	21.08	500	100	1.0	18	2P

R1 ( 1-November 2001)

**ELECTRICAL CHARACTERISTICS (CONTINUED):**

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE CURRENT		MARKING CODE
	MIN	NOM	MAX	$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		
	VOLTS	VOLTS	VOLTS	$\mu A$	$\Omega$	$\mu A$	VOLTS	
CMDZ22L	20.88	22	23.17	500	100	1.0	20	3P
CMDZ24L	22.93	24	25.57	500	120	1.0	22	4P
CMDZ27L	25.10	27	28.90	500	150	1.0	24	5P
CMDZ30L	28.00	30	32.00	500	200	1.0	27	6P
CMDZ33L	31.00	33	35.00	500	250	1.0	30	7P
CMDZ36L	34.00	36	38.00	500	300	1.0	33	8P

**SOD-323 CASE - MECHANICAL OUTLINE**

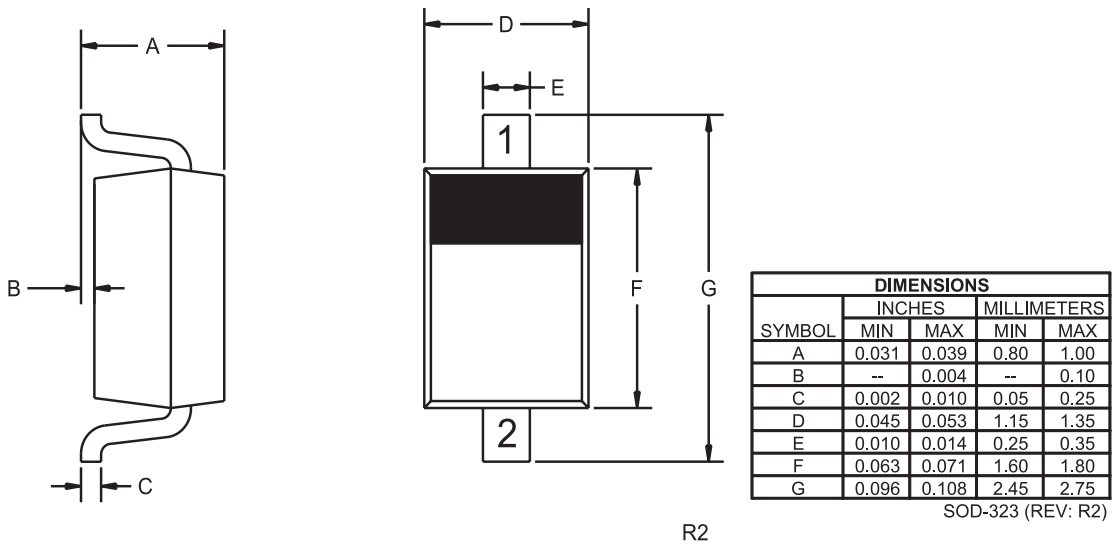

R2

LEAD CODE:

- 1) Cathode
- 2) Anode

R1 ( 1-November 2001)