

MN101C077 / 07A

Type		MN101C077 (under planning) / 07A (under development)	
ROM (×8-Bit)		16 K / 32 K	
RAM (×8-Bit)		1 024 / 1 024	
Minimum Instruction Execution Time		0.238 μs (at 2.7 V to 5.5 V, 8.4 MHz) 122 μs (at 2.7 V to 5.5 V, 32.768 kHz)	
Interrupts		<ul style="list-style-type: none"> • RESET • Watchdog • External 0 • External 1 • External 2 • External 3 • External 4 • Timer 2 • Timer 3 • Timer 4 • Timer 5 • Time Base • Serial 0 • Serial 1 • Automatic Transfer finish • A/D Conversion finish • Key Scan 	
Timer Counter		<p>Timer Counter 2 : 8-Bit × 1 (Square-Wave/8-Bit PWM Output, Event Count, Synchronous Output Event)</p> <p>Clock Source 1/1, 1/4 of System Clock, 1/1 of XI Oscillation Clock, External Clock Input</p> <p>Interrupt Source Coincidence with Compare Register 2</p> <p>Timer Counter 3 : 8-Bit × 1 (Square-Wave Output, Event Count, Generation of Remote Control Carrier, Serial 0 Baud Rate Timer)</p> <p>Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input</p> <p>Interrupt Source Coincidence with Compare Register 3</p> <p>Timer Counter 2, 3 can be cascade-connected.</p> <p>Timer Counter 4 : 16-Bit × 1 (Square-Wave/16-Bit PWM Output, Event Count, Synchronous Output Event, Input Capture)</p> <p>Clock Source 1/4, 1/16 of System Clock, 1/1 of OSC Oscillation Clock, External Clock Input</p> <p>Interrupt Source Coincidence with Compare Register 4</p> <p>Time Base Timer (One-Minute Count Setting, Five independently operable 8-Bit Timer Counter)</p> <p>Clock Source 1/4 of System Clock, 1/1, 1/8192 of OSC Oscillation Clock, 1/1, 1/8192 of XI Oscillation Clock</p> <p>Interrupt Source Coincidence with Compare Register 5, 1/8192 Prescaler Overflow</p> <p>Watchdog Timer</p> <p>Interrupt Source 1/2097152 of System Clock</p>	
Serial Interface		<p>Serial 0 : 8-Bit × 1 (Synchronous Type/Simple UART[Half-Duplex])</p> <p>Clock Source 1/2, 1/4, 1/16 of System Clock 1/2 of Timer Counter 3</p> <p>Serial 1 : 8-Bit × 1 (Synchronous Type)</p> <p>Clock Source 1/2, 1/8, 1/64 of System Clock 1/2 of Timer Counter 3</p>	
I/O Pins	I/O	27	• Common use 21 • Specified Pull-Up Resistor available • Input / Output Selectable (big unit)
	High Voltage	26	• Output 18 • Number of I/O: 8 • Pch open drain (Breakdown Voltage -30 V) FL drive 26 • Specified pull-down resistor mask option 8

A/D Inputs	8-Bit × 5ch (with S/H)
FL	(8 to 16) segments × (18 to 10) digits
Special Ports	Buzzer Output, Remote Control Carrier Signal Output
Package	LQFP064-P-1414

Electrical Characteristics

Supply Current


Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating Supply Current	IDD1	fosc = 8.4 MHz, VDD = 5 V			25	mA
	IDD2	fx = 32.768 kHz, VDD = 3 V			120	μA
Supply Current at HALT	IDD3	fx = 32.768 kHz, VDD = 3 V			10	μA
Supply Current at STOP	IDD4	VDD = 3 V			10	μA

Support Tool

In-Circuit Emulator	PX-ICE101C / D + PX-PRB101C07-64LF14-C / D PX-ICE101C / D + PX-PRB101C07-64SDIP-C / D
----------------------------	--

EPROM built-in Type	Type MN101CP07D (under development)
	ROM (× 8-Bit) 64 K
	RAM (× 8-Bit) 2.048
	Minimum Instruction Execution Time 0.238 μs (at 2.7 V to 5.5 V, 8.4 MHz) 122 μs (at 2.7 V to 5.5 V, 32.768 kHz)
	Package LQFP064-P-1414

Pin Assignment

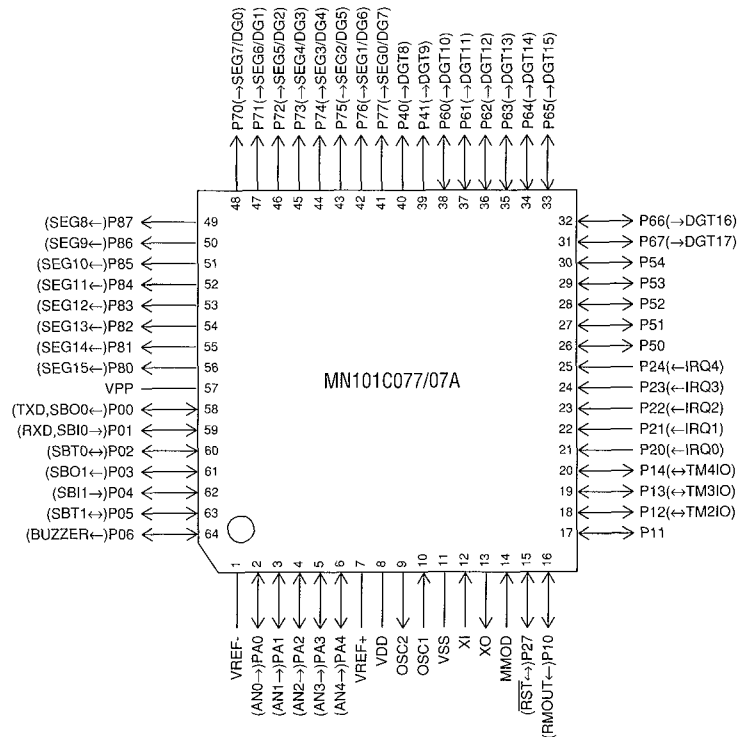

LQFP064-P-1414