

3.3V Boost LVDS High-Speed Differential Line Drivers and Receivers

Product Features

- Signaling Rates >660 Mbps (330 MHz)
- Single 3.3V Power Supply Design
- Driver:
 - ±350mV Differential Swing into a 50 ohm load
 - Propagation Delay of 1.5ns Typ.
 - Low Voltage TTL (LVTTL) Inputs are 5V Tolerant
 - Driver is High Impedance when Disabled or V_{CC} < 1.5V
- Receiver:
 - Accepts ±50mV (min.) Differential Swing with up to 2.0V ground potential difference
 - Propagation Delay of 3.3ns Typ.
 - Low Voltage TTL (LVTTL) Outputs
 - Open, Short, and Terminated Fail Safe
- Industrial Temperature Operating Range: -40°C to 85°C
- Package Options: SOIC, TSSOP, MSOP
- Bus-Terminal ESD ≥ 12kV

Product Description

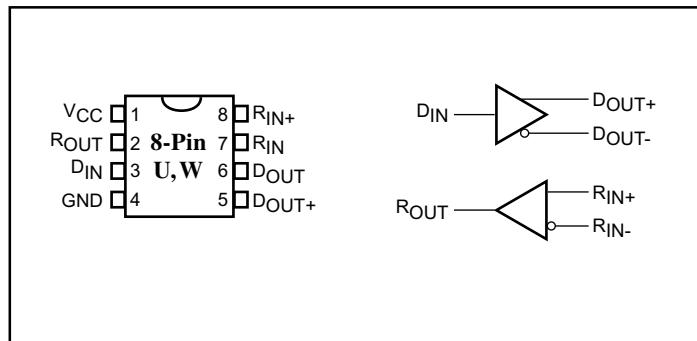
The PI90LVB179, PI90LVB180, PI90LVB050, and PI90LVB051 are differential line drivers and receivers (transceivers) that are similar to the IEEE 1596.3 SCI and ANSI/TIA/EIA-644 LVDS standards (the difference is that the driver output current is doubled). This modification enables true half-duplex operation with more than one LVDS driver or with two line transmission resistors over a 50 ohm differential transmission line. These devices use low-voltage differential signaling (LVDS) to achieve data rates in excess of 660 Mbps while being less susceptible to noise than single-ended transmission.

The drivers translate a low-voltage TTL/CMOS input into a low-voltage (350mV typical) differential output signal into a 50-ohm load. The receivers translate a differential 350mV input signal to a 3V CMOS output level. Driver section can be independently set to a power-down and high-impedance output mode with the DEN pin (active HIGH). Receiver section is controlled by the R_{EN}* pin (active LOW).

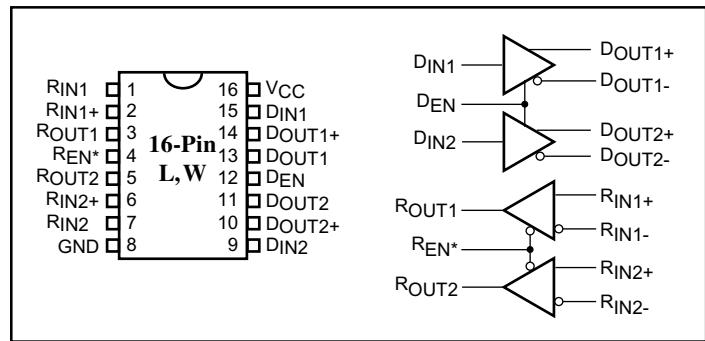
Applications

Applications include point-to-point and multidrop baseband data transmission over a controlled impedance media of approximately 50 ohms. These include intra-system connections via printed circuit board traces or cables, hubs and routers for data communications; PBXs, switches, repeaters and base stations for telecommunications and other applications such as digital cameras, printers and copiers.

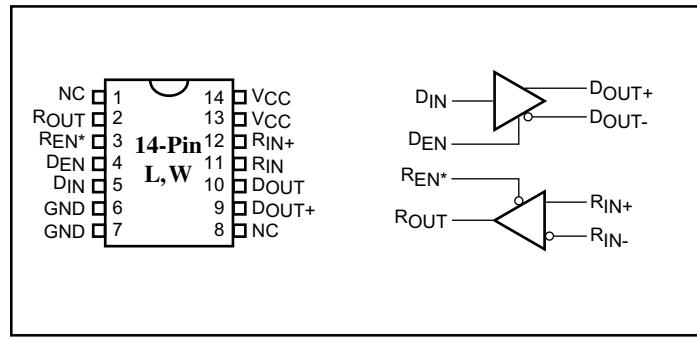
PI90LVB179



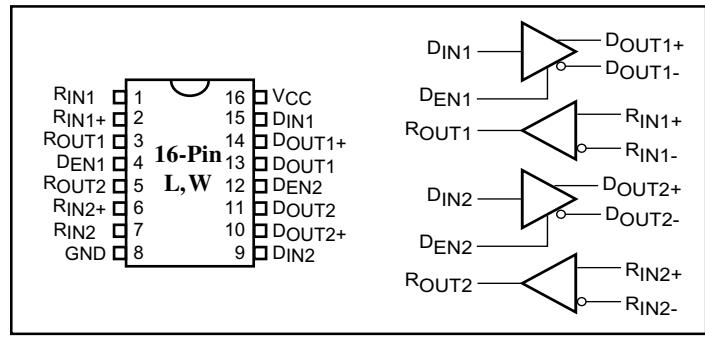
PI90LVB050



PI90LVB180



PI90LVB051





Function Tables

PI90LVB179 Receiver

Inputs	Output
$V_{ID} = V_{RIN+} - V_{RIN-}$	R_{OUT}
$V_{ID} \geq 50\text{mV}$	H
$-50\text{mV} < V_{ID} < 50\text{mV}$?
$V_{ID} \leq -50\text{mV}$	L
open	H

PI90LVB179 Driver

Input	Output	
D _{IN}	D _{OUT+}	D _{OUT-}
L	L	H
H	H	L
open	L	H

PI90LVB180/PI90LVB050/PI90LVB051 Receiver

Inputs	Output	
$V_{ID} = V_{RIN+} - V_{RIN-}$	R _{EN*}	R_{OUT}
$V_{ID} \geq 50\text{mV}$	L	H
$-50\text{mV} < V_{ID} < 50\text{mV}$	L	?
$V_{ID} \leq -50\text{mV}$	L	L
open	L	H
X	H	Z

PI90LVB180/PI90LVB050/PI90LVB051 Driver

Inputs		Output	
D _{IN}	D _{EN}	D _{OUT+}	D _{OUT-}
L	H	L	H
H	H	H	L
open	H	L	H
X	L	Z	Z

Notes:

H = High Level, L = Low Level

? = Indeterminate, Z = High-Impedance, X = Don't Care

Pin Descriptions

Name	Description
D _{IN}	TTL/CMOS driver input pins
D _{OUT+}	Non-inverting driver output pins
D _{OUT-}	Inverting driver output pins
R _{OUT}	TTL/CMOS receiver output pins
R _{IN+}	Non-inverting receiver input pins
R _{IN-}	Inverting receiver input pins
V _{ID}	Input Differential Signal Voltage
GND	Ground pin
V _{CC}	Positive power supply pin, +3.3V ±10%

Absolute Maximum Ratings

Supply Voltage (V _{CC})	-0.5V to +4.0V
Driver	
Input Voltage (D _{IN})	-0.3V to (V _{CC} + 0.3V)
Output Voltage (D _{OUT+} , D _{OUT-})	-0.3V to +3.9V
Short Circuit Duration (D _{OUT+} , D _{OUT-})	Continuous
Enable Input Voltage (D _{EN})	-0.3V to (V _{CC} + 0.3V)
Receiver	
Input Voltage (R _{IN+} , R _{IN-})	-0.3V to +3.9V
Output Voltage (R _{OUT})	-0.3V to (V _{CC} + 0.3V)
Enable Input Voltage (R _{EN*})	-0.3V to (V _{CC} + 0.3V)
Storage Temperature Range	-65°C to +150°C
Lead Temperature Range Soldering (4s)	+260°C
Maximum Junction Temperature	+150°C
ESD Rating	>12kV

Recommended Operating Conditions

	Min.	Typ.	Max.	Units
Supply Voltage (V _{CC})	3	3.3	3.6	V
High Level Input Voltage, V _{IH}	2			
Low Level Input Voltage, V _{IL}			0.8	
Magnitude of Differential Input Voltage V _{ID}	0.1		0.6	
Common-mode Input Voltage, V _{IC} (Fig 5)	V _{ID} / 2		2.4 – V _{ID} / 2	
			V _{CC} – 0.8	
Operating Free Air Temperature T _A	-40		85	°C



**PI90LVB179/PI90LVB180/
PI90LVB050/PI90LVB051**
3.3V Boost LVDS High-Speed Differential Line Drivers & Receivers

Electrical Characteristics (Over recommended operating conditions unless otherwise noted).

Parameter		Test Condition	Min.	Typ. [†]	Max.	Units
I_{CC}^* Supply Current	PI90LVB179	No receiver load, Driver $R_L = 50$ ohms		10	14	mA
		Driver and receiver enabled. No receiver load, Driver $R_L = 50$ ohms		10.5	14	
	PI90LVB180	Driver disabled, Receiver disabled, $R_L = 50$ ohms		1	1.5	
		Driver disabled, Receiver enabled, No load		0.9	1.1	
	PI90LVB050	Disabled		1.3	1.7	
		Driver and receivers enabled. No receiver loads, Driver $R_L = 50$ ohms		20.5	24.6	
	PI90LVB050	Drivers disabled, Receivers disabled, $R_L = 50$ ohms		3.1	3.7	
		Drivers disabled, Receivers enabled, No loads		1.0	1.2	
	PI90LVB051	Disabled		1.2	1.5	
		Drivers enabled, No receiver loads, Driver $R_L = 50$ ohms		20.5	24.7	
		Drivers disabled, No loads		1.0	1.2	

[†]All typical values are at 25°C with a 3.3V supply

* I_{CC} measured with all TTL input, $V_{IN} = V_{CC}$ or GND.

Driver Electrical Characteristics (Over recommended operating conditions unless otherwise noted).

Parameter		Test Conditions	Min.	Typ.	Max.	Units
V_{OD}	Differential output voltage magnitude	$R_L = 50$ ohms See Figures 1 and 2	247	420	520	mV
$\Delta V_{OD} $	Change in differential output voltage magnitude between logic states		-50		50	
$V_{OC(SS)}$	Steady-state common-mode output voltage	See Figure 3	1.125	1.25	1.375	V
$\Delta V_{OC(SS)}$	Change in steady-state common-mode output voltage between logic states		-50		50	mV
$V_{OC(PP)}$	Peak-to-peak common-mode output voltage			50	165	
I_{IH}	High-level input current	$V_{IH} = 5V$		-0.5	-20	μA
				2	20	
I_{IL}	Low-level input current	$V_{IL} = 0.8V$		-0.5	-10	
				2	10	
I_{OS}	Short-circuit output current	V_{OY} or $V_{OZ} = 0V$		-6	-12	mA
		$V_{OD} = 0V$		-8	-15	
I_{OZ}	High-impedance output current	$V_{OD} = 600mV$			± 1	μA
		$V_O - 0V$ or V_{CC}			± 1	
$I_{O(OFF)}$	Power-off output current	$V_{CC} = 0V$, $V_O = 3.6V$			± 1	
C_{IN}	Input capacitance			3	10.5	pF



Receiver Electrical Characteristics (Over recommended operating conditions unless otherwise noted).

Parameter		Test Conditions	Min.	Typ.	Max.	Units
V_{ITH+}	Positive-going differential input voltage threshold	See Figures 5 & Table 1			50	mV
V_{ITH-}	Negative-going differential input voltage threshold		-50			
V_{OH}	High-level output voltage	$I_{OH} = -8\text{mA}$	2.4			V
V_{OL}	Low-level output voltage	$I_{OL} = 8\text{mA}$			0.4	V
I_I	Input current (R_{IN+} or R_{IN-})	$V_I = 0$	-2	-11	-20	μA
		$V_I = 2.4\text{V}$	-1.2	-3		
$I_{I(OFF)}$	Power-off input current (R_{IN+} or R_{IN-})	$V_{CC} = 0$			± 20	
I_H	High-level input current (enables)	$V_{IH} = 2\text{V}$			± 10	
I_L	Low-level input current (enables)	$V_{IL} = 0.8\text{V}$			± 10	
I_{OZ}	High-impedance output current	$V_O = 0$ or 5V			± 10	
C_I	Input capacitance			5		pF

†All typical values are at 25°C with a 3.3V supply

Driver Switching Characteristics (Over recommended operating conditions unless otherwise noted).

Parameter	Test Conditions	Min.	Typ. [†]	Max.	Units
t_{PLH}	$R_L = 50 \text{ ohms}$ $C_L = 10\text{pF}$ See Figure 2		2.0	2.6	ns
t_{PHL}			1.9	2.5	
t_r			0.4	0.6	
t_f			0.4	0.6	ps
$t_{sk(p)}$		200	310		
$t_{sk(o)}$		90	160		
$t_{sk(pp)}$			0.9		ns
t_{PZH}	See Figure 7		3.3	5	
t_{PZL}			2.0	3.3	
t_{PHZ}			1.7	3.3	
t_{PLZ}			1.7	3.3	

†All typical values are at 25°C with a 3.3V supply

‡ $t_{sk(o)}$: the maximum delay time difference between drivers on the same device.

** $t_{sk(pp)}$: magnitude of difference in propagation delay times between any specific terminals of two devices (all things being equal)

Receiving Switching Characteristics (Over recommended operating conditions unless otherwise noted).

Parameter		Test Conditions	Min.	Typ. [†]	Max.	Units
t _{PLH}	Propagation delay time, low-to-high-level output	C _L = 10pF See Figure 6		1.9	2.9	ns
t _{PHL}	Propagation delay time, high-to-low-level output			2.4	3.3	
t _{sk(p)}	Pulse skew (t _{PHL} – t _{PLH})			0.1	0.4	
t _{sk(pp)**}	Part-part-part skew**				1.3	
t _{sk(o)}	Channel-to-channel skew		40	80		ps
t _r	Output signal rise time			1.1	1.7	ns
t _f	Output signal fall time			1.3	2.1	
t _{PZH}	Propagation delay time, high-level-to-high-impedance output	See Figure 7		1.6	2.4	ns
t _{PZL}	Propagation delay time, low-level-to-low-impedance output			4.1	5.9	
t _{PHZ}	Propagation delay time, high-impedance-to-high-level output			2.5	3.2	
t _{PLZ}	Propagation delay time, low-impedance-to-high-level output			6.0	7.8	

†All typical values are at 25°C with a 3.3V supply

**t_{sk(pp)} is magnitude of the difference in propagation delay times between any specific terminals of two devices (all things being equal)

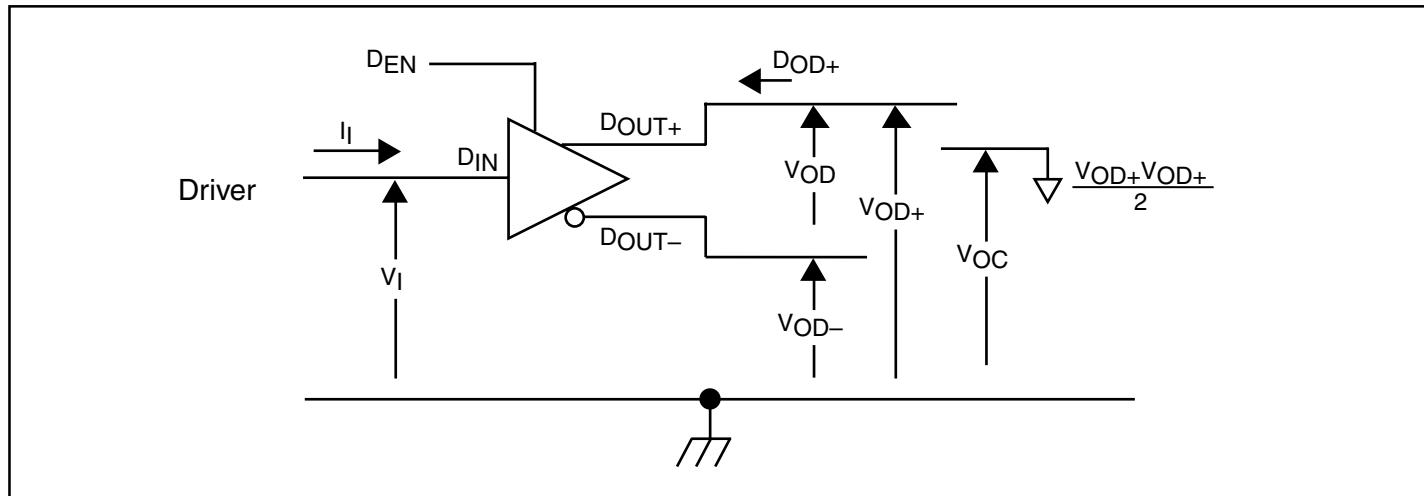
Parameter Measurement Information


Figure 1. Driver Voltage and Current Definitions

Parameter Measurement Information

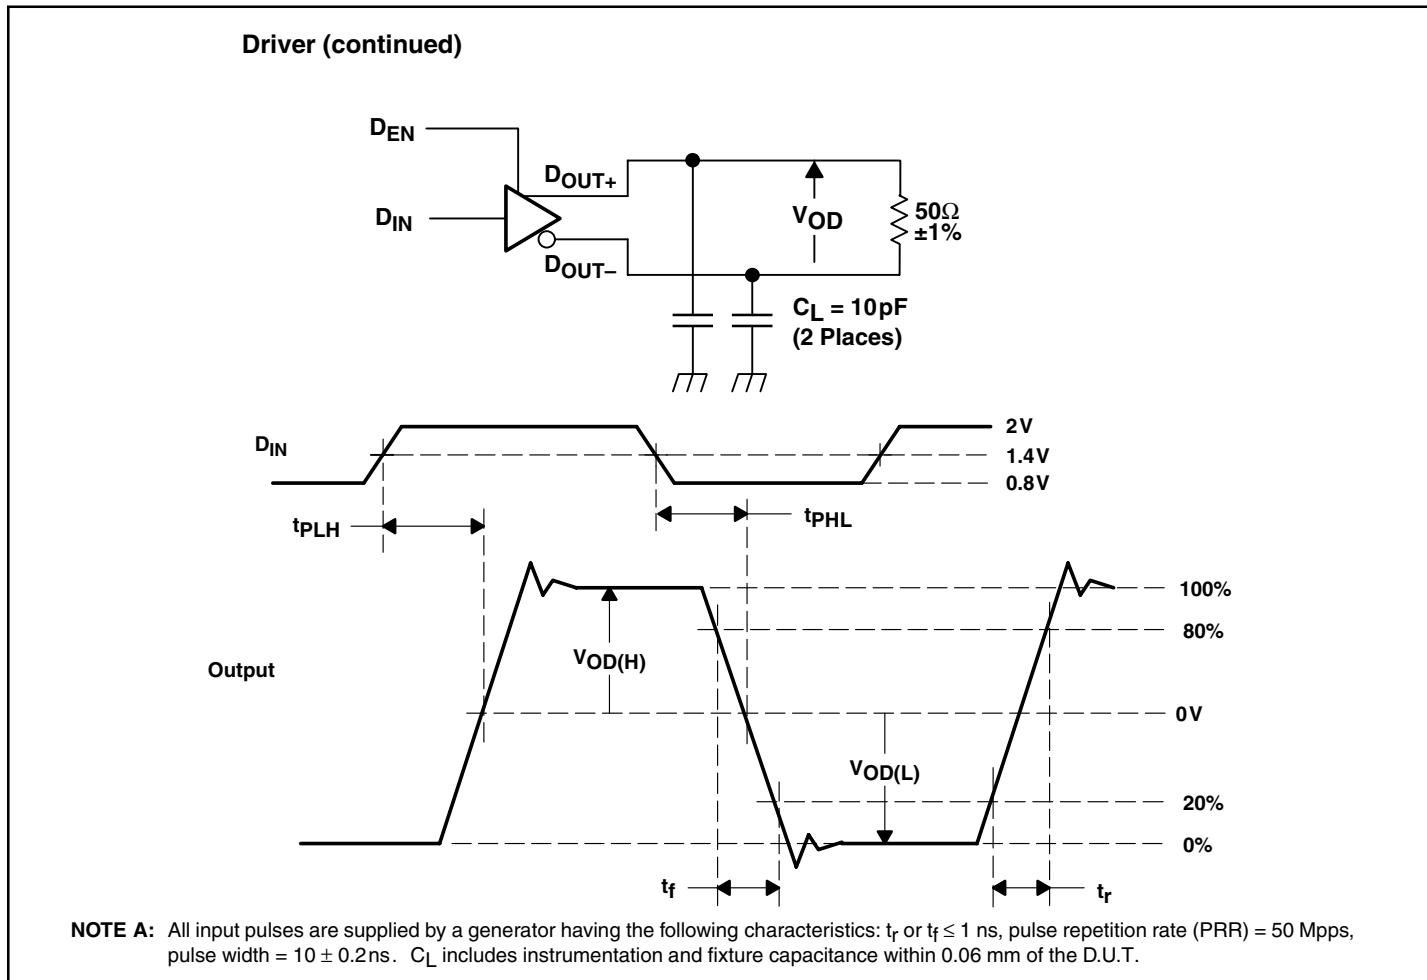


Figure 2. Test Circuit, Timing, and Voltage Definitions for the Differential Output Signal

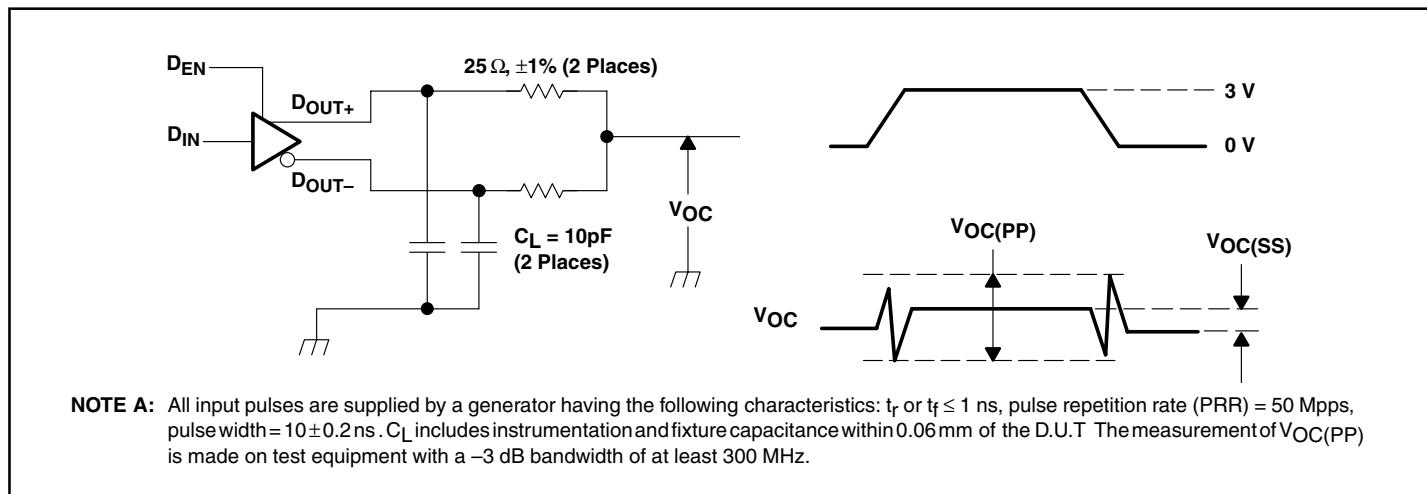
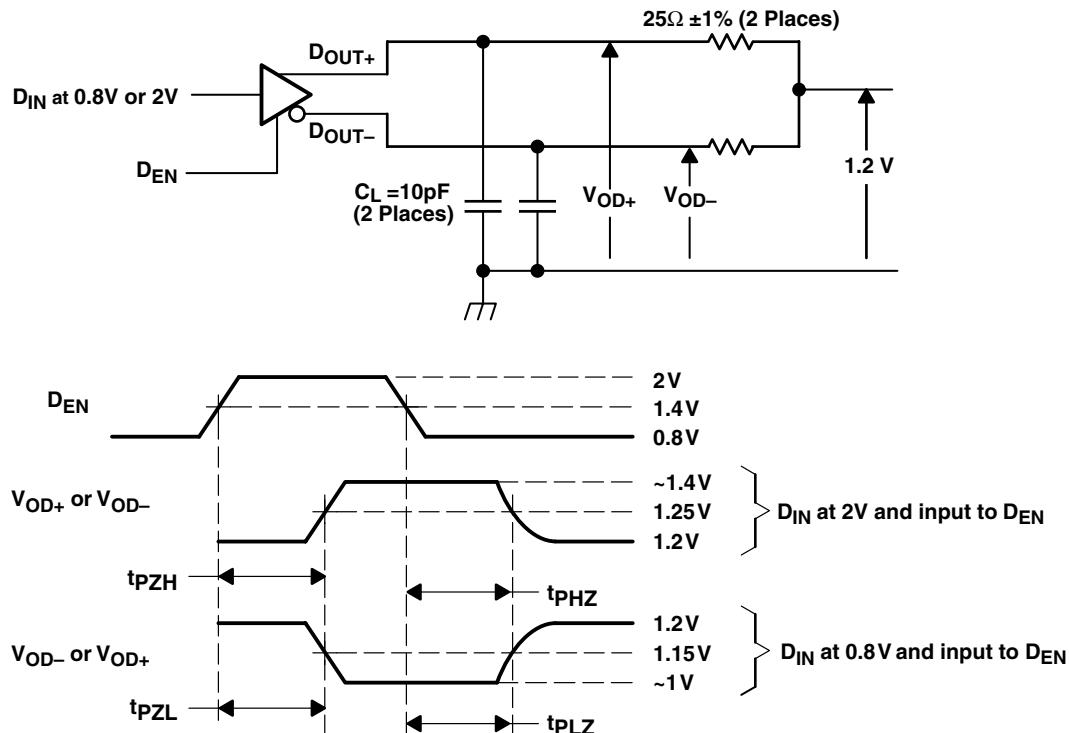


Figure 3. Test Circuit and Definitions for the Driver Common-Mode Output Voltage

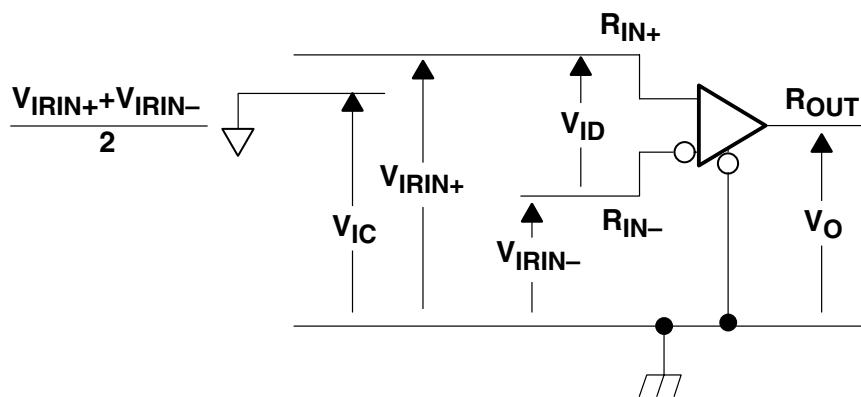
Parameter Measurement Information

Driver (continued)

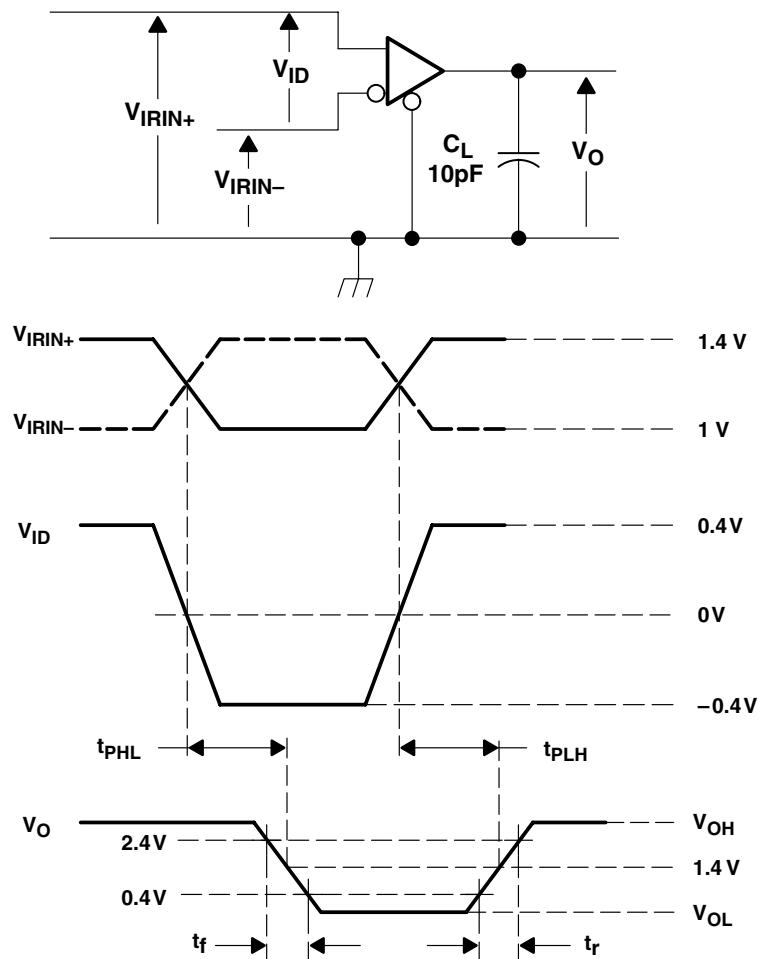


NOTE A: All input pulses are supplied by a generator having the following characteristics: t_r or $t_f \leq 1\text{ns}$, pulse repetition rate (PRR) = 0.5 Mpps, pulse width = 500 ± 10 ns. C_L includes instrumentation and fixture capacitance within 0.06mm of the D.U.T.

Figure 4. Enable and Disable Timing Circuit and Definitions

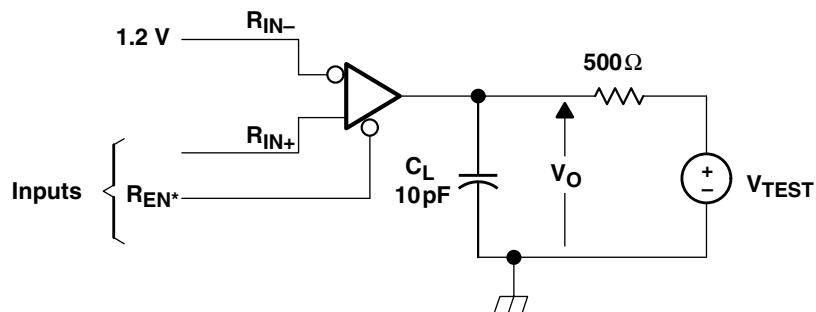
Parameter Measurement Information
Receiver

Figure 5. Receiver Voltage Definitions
Table 1. Receiver Minimum and Maximum Input Threshold Test Voltages

APPLIED VOLTAGES (V)		RESULTING DIFFERENTIAL INPUT VOLTAGE (mV)	RESULTING COMMON- MODE INPUT VOLTAGE (V)
V_{IRIN+}	V_{IRIN-}	V_{ID}	V_{IC}
1.225	1.175	50	1.2
1.175	1.225	-50	1.2
2.375	2.325	50	2.35
2.325	2.375	-50	2.35
0.1	0	50	0.05
0	0.05	-50	0.05
1.5	0.9	600	1.2
0.9	1.5	-600	1.2
2.4	1.8	600	2.1
1.8	2.4	-600	2.1
0.6	0	600	0.3
0	0.6	-600	0.3

Parameter Measurement Information
Receiver (continued)


NOTE A: All input pulses are supplied by a generator having the following characteristics: t_r or $t_f \leq 1$ ns, pulse repetition rate (PRR) = 50 Mpps, pulse width = 10 ± 0.2 ns. C_L includes instrumentation and fixture capacitance within 0.06 m of the D.U.T.

Figure 6. Timing Test Circuit and Waveforms

Parameter Measurement Information
Receiver (continued)


NOTE A: All input pulses are supplied by a generator having the following characteristics: tr or $tf \leq 1\text{ ns}$, pulse repetition rate (PRR) = 0.5 Mpps, pulse width = $500 \pm 10\text{ ns}$. CL includes instrumentation and fixture capacitance within 0.06m of the D.U.T.

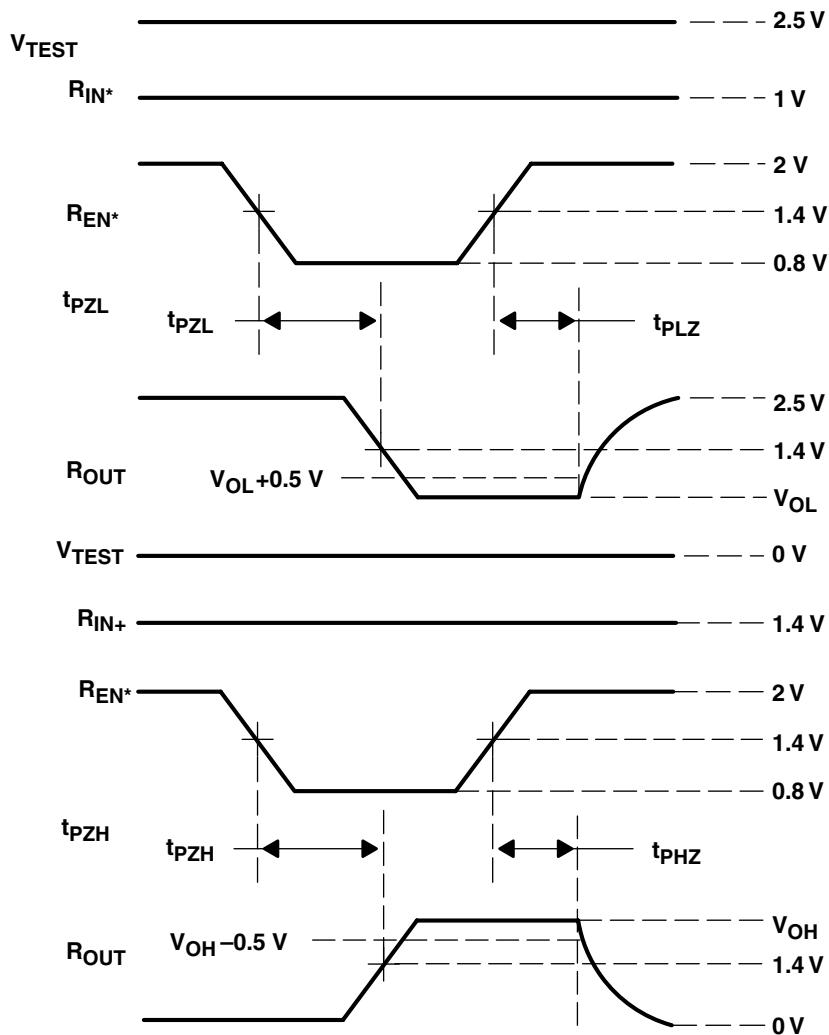
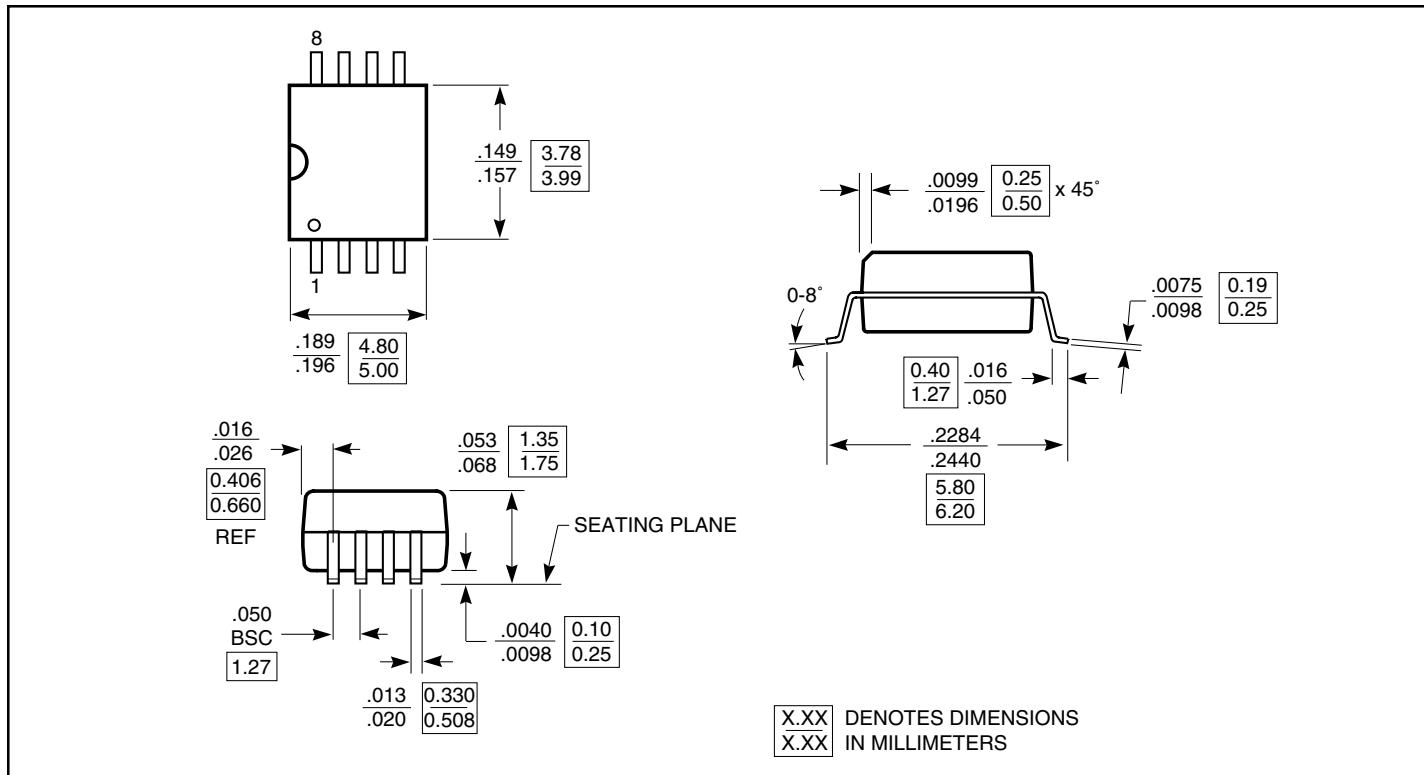
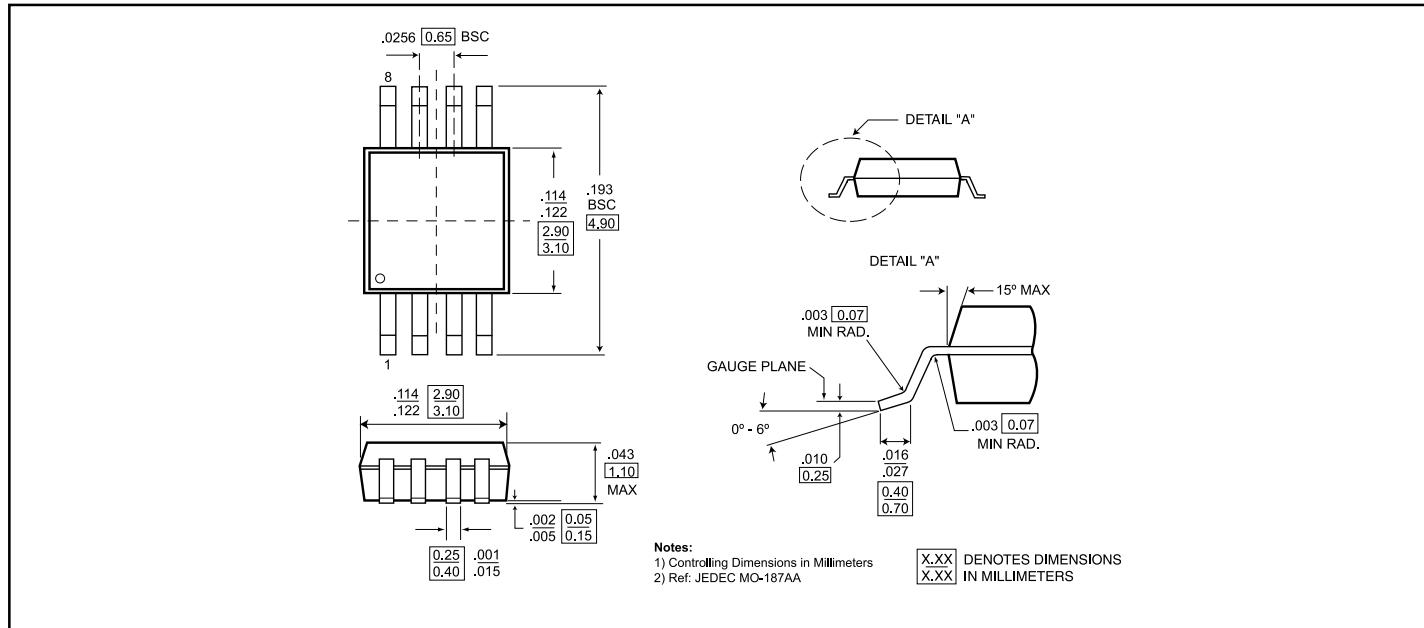


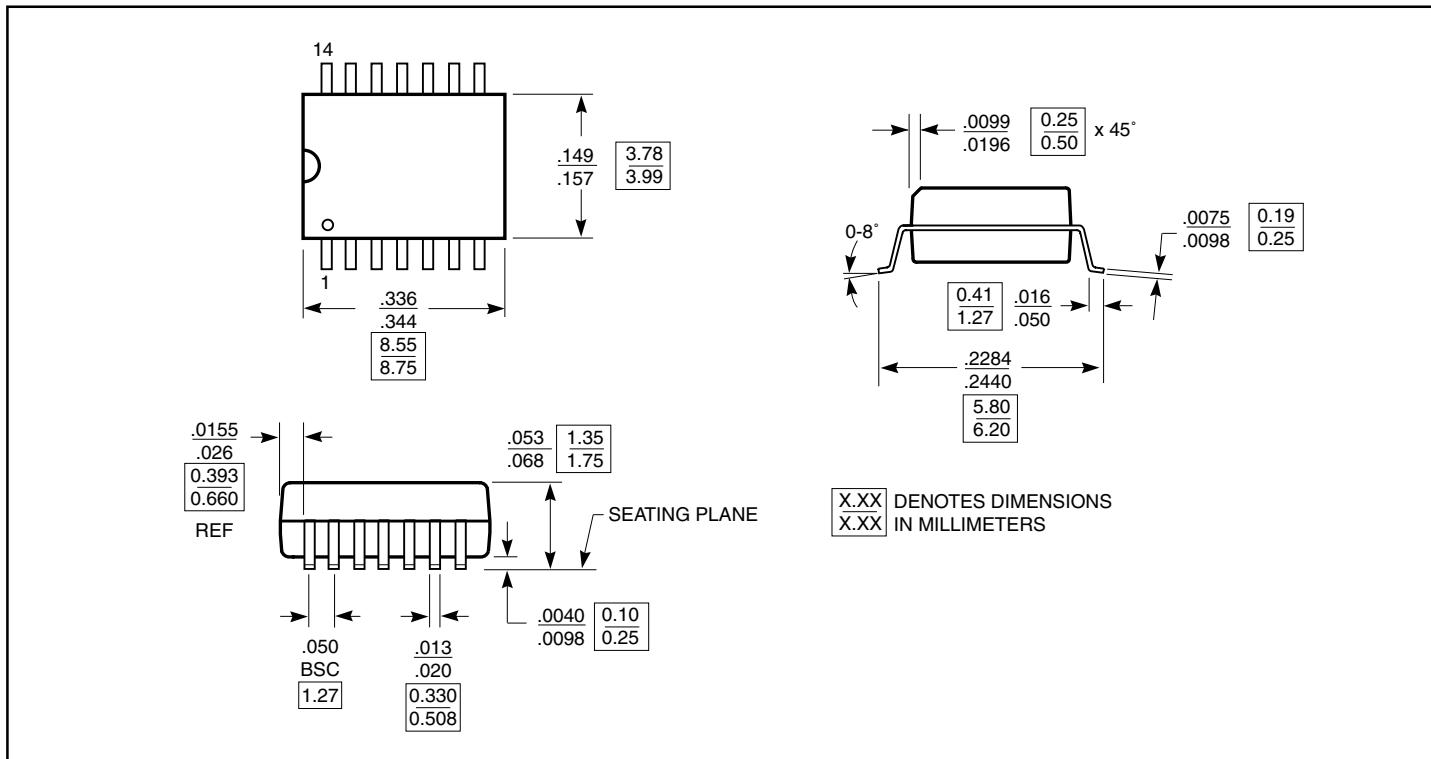
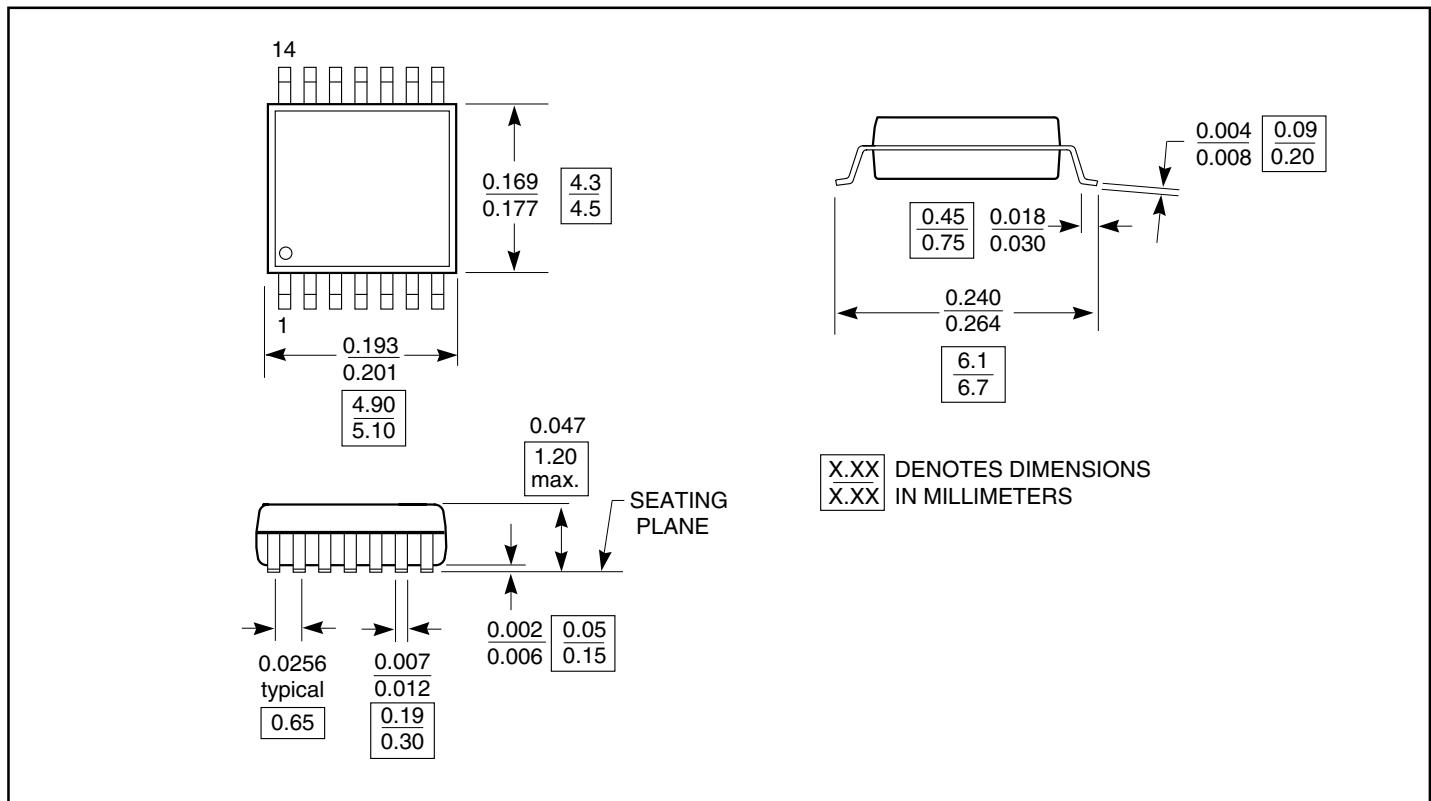
Figure 7. Enable/Disable Time Test Circuit and Waveforms

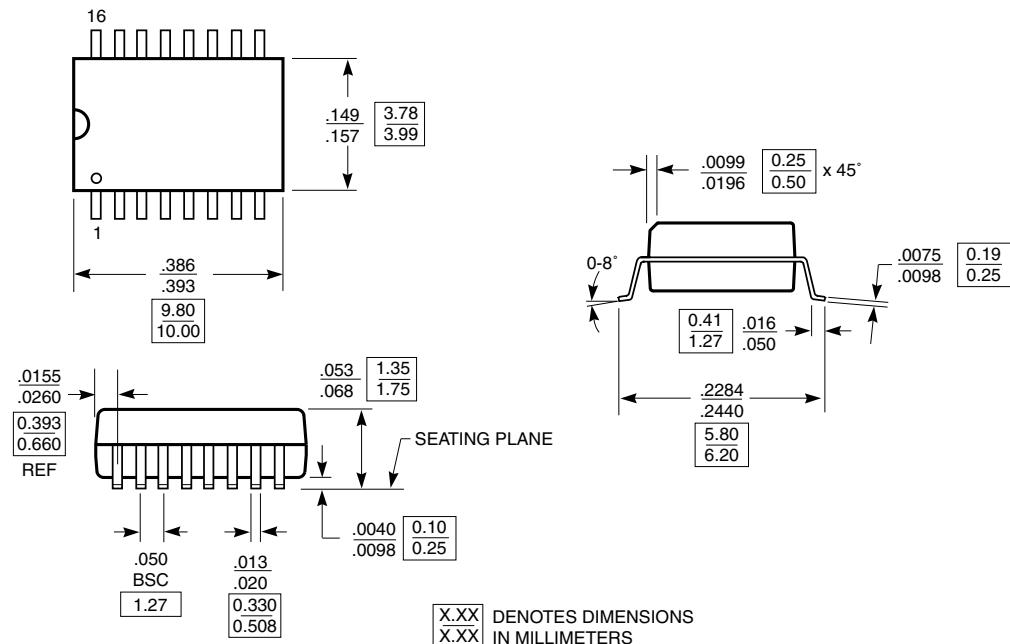
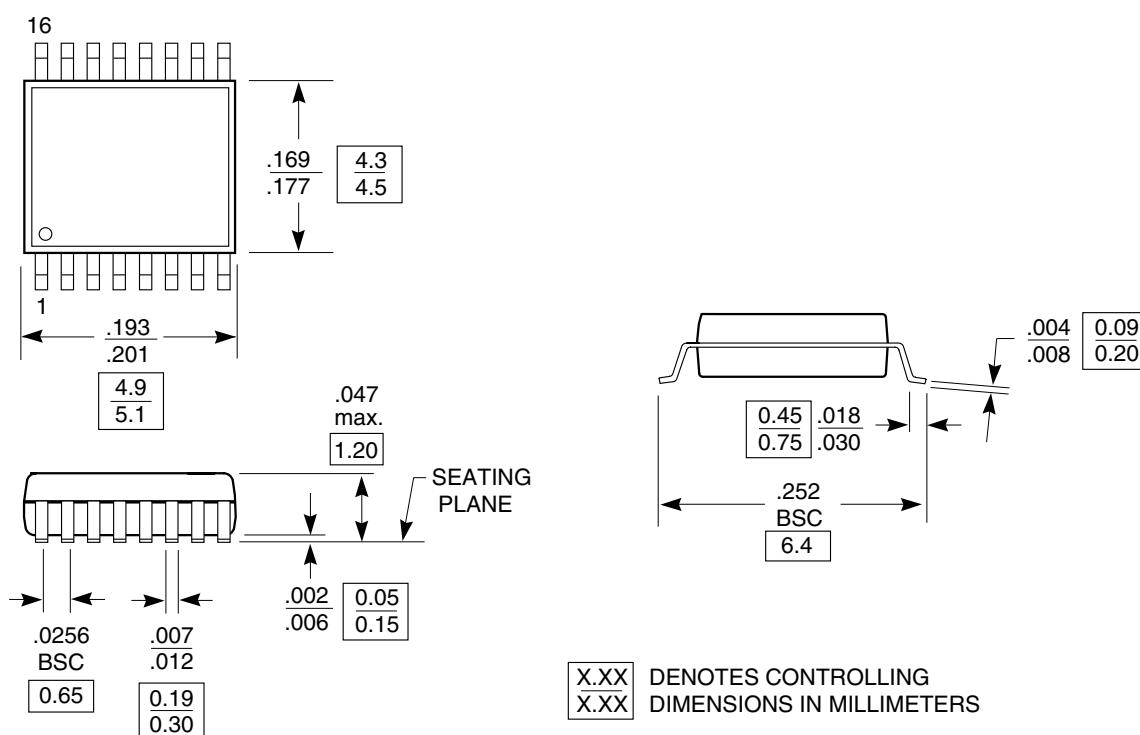
8-Pin SOIC W Package



8-Pin Mini Small Outline U Package (MSOP)



14-Pin SOIC (150 Mil) W Package

14-Pin TSSOP (4.4mm wide) L Package


16-Pin SOIC (150 Mil) W Package

16-Pin TSSOP (4.4mm wide) L Package




Ordering Information

Part	Pin - Package	Temperature
PI90LVB179W	8-SOIC	-40°C to +85°C
PI90LVB180W	14-SOIC	-40°C to +85°C
PI90LVB050W	16-SOIC	-40°C to +85°C
PI90LVB051W	16-SOIC	-40°C to +85°C
PI90LVB179U	8-MSOP	-40°C to +85°C
PI90LVB180L	14-TSSOP	-40°C to +85°C
PI90LVB050L	16-TSSOP	-40°C to +85°C
PI90LVB051L	16-TSSOP	-40°C to +85°C

Pericom Semiconductor Corporation

2380 Bering Drive • San Jose, CA 95131 • 1-800-435-2336 • Fax (408) 435-1100 • <http://www.pericom.com>