

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## **74HC/HCT107**

### Dual JK flip-flop with reset; negative-edge trigger

Product specification  
File under Integrated Circuits, IC06

December 1990

**Dual JK flip-flop with reset; negative-edge trigger****74HC/HCT107****FEATURES**

- Output capability: standard
- $I_{CC}$  category: flip-flops

**GENERAL DESCRIPTION**

The 74HC/HCT107 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL (LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT107 are dual negative-edge triggered JK-type flip-flops featuring individual J, K, clock ( $n\bar{CP}$ ) and reset ( $n\bar{R}$ ) inputs; also complementary Q and  $\bar{Q}$  outputs.

The J and K inputs must be stable one set-up time prior to the HIGH-to-LOW clock transition for predictable operation.

The reset ( $n\bar{R}$ ) is an asynchronous active LOW input. When LOW, it overrides the clock and data inputs, forcing the Q output LOW and the  $\bar{Q}$  output HIGH.

Schmitt-trigger action in the clock input makes the circuit highly tolerant to slower clock rise and fall times.

**QUICK REFERENCE DATA**

$GND = 0 \text{ V}$ ;  $T_{amb} = 25 \text{ }^{\circ}\text{C}$ ;  $t_r = t_f = 6 \text{ ns}$

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
$t_{PHL}/t_{PLH}$	propagation delay $n\bar{CP}$ to $nQ$	$C_L = 15 \text{ pF};$ $V_{CC} = 5 \text{ V}$	16	16	ns
	$n\bar{CP}$ to $n\bar{Q}$		16	18	ns
	$n\bar{R}$ to $nQ, n\bar{Q}$		16	17	ns
	maximum clock frequency		78	73	MHz
$C_I$	input capacitance		3.5	3.5	pF
$C_{PD}$	power dissipation capacitance per flip-flop	notes 1 and 2	30	30	pF

**Notes**

1.  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

$f_i$  = input frequency in MHz

$f_o$  = output frequency in MHz

$\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs

$C_L$  = output load capacitance in pF

$V_{CC}$  = supply voltage in V

2. For HC the condition is  $V_I = GND$  to  $V_{CC}$   
For HCT the condition is  $V_I = GND$  to  $V_{CC} - 1.5 \text{ V}$ .

**ORDERING INFORMATION**

See "[74HC/HCT/HCU/HCMOS Logic Package Information](#)".

## Dual JK flip-flop with reset; negative-edge trigger

74HC/HCT107

## PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
1, 8, 4, 11	1J, 2J, 1K, 2K	synchronous inputs; flip-flops 1 and 2
2, 6	1 $\bar{Q}$ , 2 $\bar{Q}$	complement flip-flop outputs
3, 5	1Q, 2Q	true flip-flop outputs
7	GND	ground (0 V)
12, 9	1CP, 2CP	clock input (HIGH-to-LOW, edge-triggered)
13, 10	1R, 2R	asynchronous reset inputs (active LOW)
14	V <sub>CC</sub>	positive supply voltage

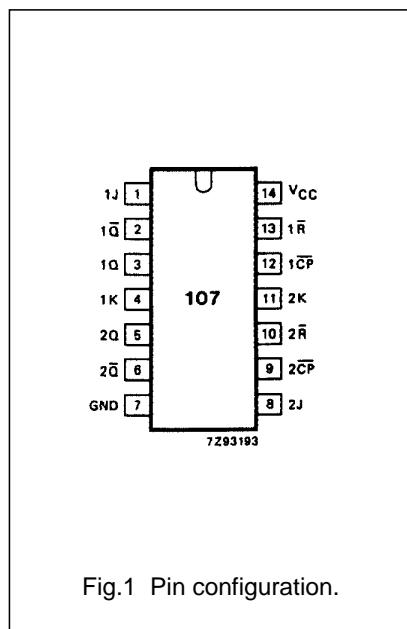


Fig.1 Pin configuration.

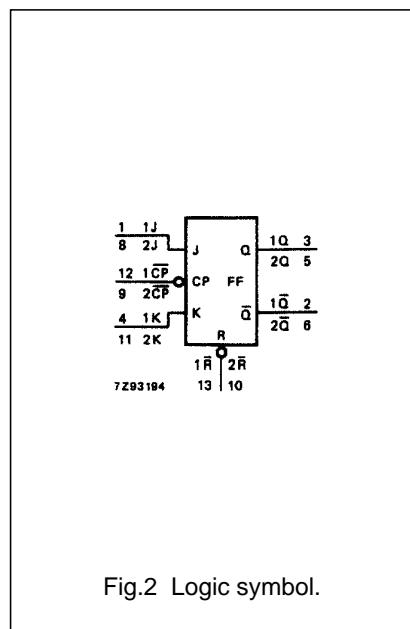


Fig.2 Logic symbol.

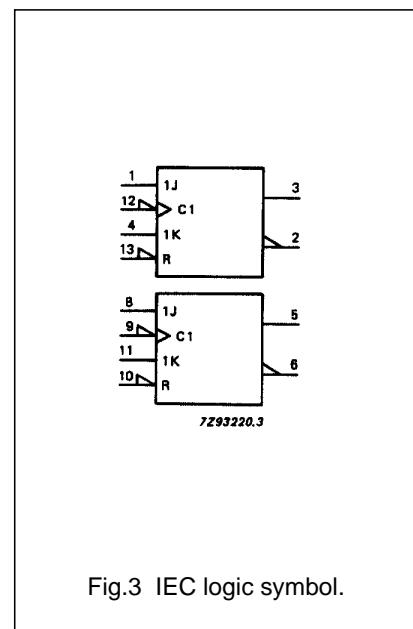


Fig.3 IEC logic symbol.

## Dual JK flip-flop with reset; negative-edge trigger

74HC/HCT107

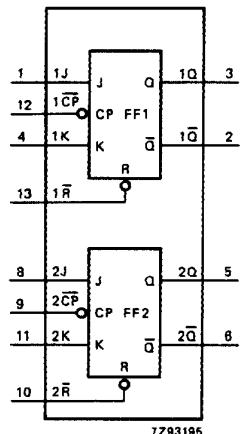


Fig.4 Functional diagram.

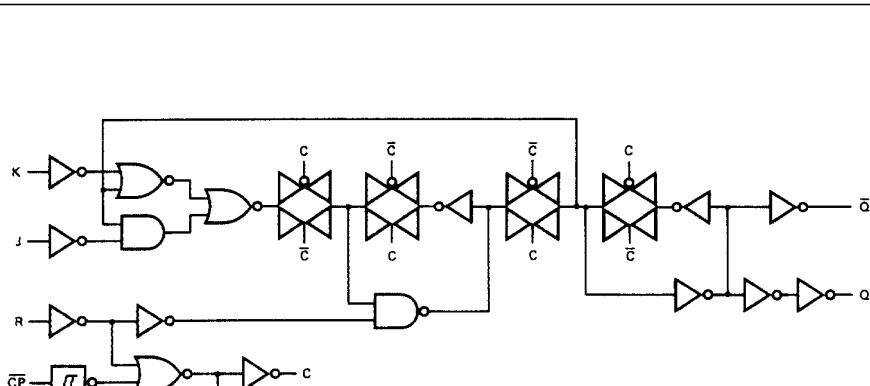


Fig.5 Logic diagram (one flip-flop).

## FUNCTION TABLE

OPERATING MODE	INPUTS				OUTPUTS	
	nR	nCP	J	K	Q	Q̄
asynchronous reset	L	X	X	X	L	H
toggle	H	↓	h	h	¬q	q
load "0" (reset)	H	↓	l	h	L	H
load "1" (set)	H	↓	h	l	H	L
hold "no change"	H	↓	l	l	q	¬q

## Note

1. H = HIGH voltage level  
h = HIGH voltage level one set-up time prior to the HIGH-to-LOW CP transition  
L = LOW voltage level  
l = LOW voltage level one set-up time prior to the HIGH-to-LOW CP transition  
q = lower case letters indicate the state of the referenced output one set-up time prior to the HIGH-to-LOW CP transition
- X = don't care  
↓ = HIGH-to-LOW CP transition

## Dual JK flip-flop with reset; negative-edge trigger

74HC/HCT107

## DC CHARACTERISTICS FOR 74HC

For the DC characteristics see "*74HC/HCT/HCU/HCMOS Logic Family Specifications*".

Output capability: standard

 $I_{CC}$  category: flip-flops

## AC CHARACTERISTICS FOR 74HC

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)							UNIT	TEST CONDITIONS				
		74HC								V <sub>CC</sub> (V)	WAVEFORMS			
		+25			−40 to +85		−40 to +125							
		min.	typ.	max.	min.	max.	min.	max.						
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay nCP to nQ		52 19 15	160 32 27		200 40 34		240 48 41	ns	2.0 4.5 6.0	Fig.6			
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay nCP to n̄Q		52 19 15	160 32 27		200 40 34		240 48 41	ns	2.0 4.5 6.0	Fig.6			
t <sub>PHL</sub> / t <sub>TPLH</sub>	propagation delay n̄R to nQ, n̄Q		52 19 15	155 31 26		195 39 33		235 47 40	ns	2.0 4.5 6.0	Fig.7			
t <sub>THL</sub> / t <sub>TLH</sub>	output transition time		19 7 6	75 15 13		95 19 16		110 22 19	ns	2.0 4.5 6.0	Fig.6			
t <sub>w</sub>	clock pulse width HIGH or LOW	80 16 14	22 8 6		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.6			
t <sub>w</sub>	reset pulse width LOW	80 16 14	22 8 6		100 20 17		120 24 20		ns	2.0 4.5 6.0	Fig.7			
t <sub>rem</sub>	removal time n̄R to n̄CP	60 12 10	19 7 6		75 15 13		90 18 15		ns	2.0 4.5 6.0	Fig.7			
t <sub>su</sub>	set-up time nJ, nK to n̄CP	100 20 17	22 8 6		125 25 21		150 30 26		ns	2.0 4.5 6.0	Fig.6			
t <sub>h</sub>	hold time nJ, nK to n̄CP	3 3 3	−6 −2 −2		3 3 3		3 3 3		ns	2.0 4.5 6.0	Fig.6			
f <sub>max</sub>	maximum clock pulse frequency	6.0 30 35	23 70 85		4.8 24 28		4.0 20 24		MHz	2.0 4.5 6.0	Fig.6			

## Dual JK flip-flop with reset; negative-edge trigger

74HC/HCT107

## DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see "*74HC/HCT/HCU/HCMOS Logic Family Specifications*".

Output capability: standard

 $I_{CC}$  category: flip-flops

## Note to HCT types

The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given in the family specifications.To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
nK	0.60
nR	0.65
nCP, nJ	1.00

## AC CHARACTERISTICS FOR 74HCT


GND = 0 V;  $t_f = t_f = 6$  ns;  $C_L = 50$  pF

SYMBOL	PARAMETER	T <sub>amb</sub> (°C)						UNIT	TEST CONDITIONS			
		74HCT							V <sub>CC</sub> (V)	WAVEFORMS		
		+25			-40 to +85		-40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t <sub>PHL</sub> / t <sub>PLH</sub>	propagation delay nCP to nQ		19	36		45		54	ns	4.5	Fig.6	
t <sub>PHL</sub> / t <sub>PLH</sub>	propagation delay nCP to nQ̄		21	36		45		54	ns	4.5	Fig.6	
t <sub>PHL</sub> / t <sub>PLH</sub>	propagation delay nR to nQ, nQ̄		20	38		48		57	ns	4.5	Fig.7	
t <sub>THL</sub> / t <sub>TLH</sub>	output transition time		7	15		19		22	ns	4.5	Fig.6	
t <sub>w</sub>	clock pulse width HIGH or LOW	16	9		20		24		ns	4.5	Fig.6	
t <sub>w</sub>	reset pulse width LOW	20	11		25		30		ns	4.5	Fig.7	
t <sub>rem</sub>	removal time nR to nCP	14	8		18		21		ns	4.5	Fig.7	
t <sub>su</sub>	set-up time nJ, nK to nCP	20	7		25		30		ns	4.5	Fig.6	
t <sub>h</sub>	hold time nJ, nK to nCP	5	-2		5		5		ns	4.5	Fig.6	
f <sub>max</sub>	maximum clock pulse frequency	30	66		24		20		MHz	4.5	Fig.6	

## Dual JK flip-flop with reset; negative-edge trigger

74HC/HCT107

## AC WAVEFORMS

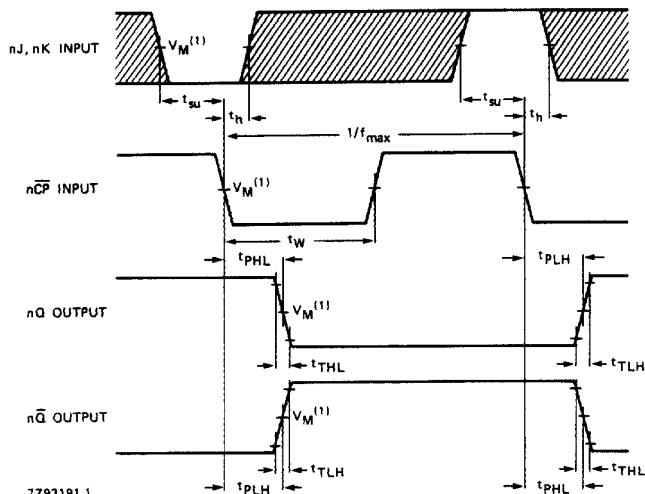


The shaded areas indicate when the input is permitted to change for predictable output performance.

(1) HC : V<sub>M</sub> = 50%; V<sub>I</sub> = GND to V<sub>CC</sub>.  
HCT: V<sub>M</sub> = 1.3 V; V<sub>I</sub> = GND to 3 V.

7Z93191.1

Fig.6 Waveforms showing the clock ( $n\overline{CP}$ ) to output ( $nQ$ ,  $n\overline{Q}$ ) propagation delays, the clock pulse width, the  $J$  and  $K$  to  $n\overline{CP}$  set-up and hold times, the output transition times and the maximum clock pulse frequency.

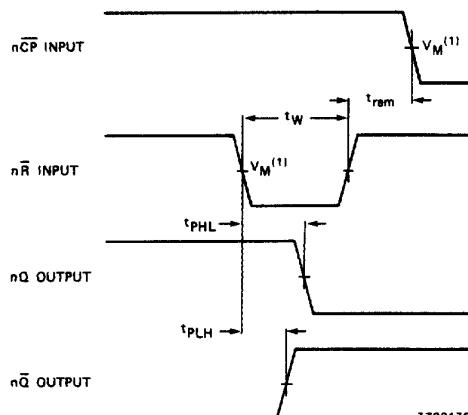

(1) HC : V<sub>M</sub> = 50%; V<sub>I</sub> = GND to V<sub>CC</sub>.  
HCT: V<sub>M</sub> = 1.3 V; V<sub>I</sub> = GND to 3 V.

7Z22175

Fig.7 Waveforms showing the reset ( $n\overline{R}$ ) input to output ( $nQ$ ,  $n\overline{Q}$ ) propagation delays, the reset pulse width and the  $n\overline{R}$  to  $n\overline{CP}$  removal time.

## PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".