



CHENYI ELECTRONICS

DF005 THRU DF10

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:1.0A



FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Surge overload rating: 50A peak

MECHANICAL DATA

- Terminal:** Plated leads solderable per MIL-STD 202E, method 208C
- Case:** UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity:** Polarity symbol marked on body
- Mounting position:** any

DF



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60HZ, resistive or inductive load rating at 25 °C, unless otherwise stated, for capacitive load, derate current by 20%)

| | SYMBOL | DF005 | DF01 | DF02 | DF04 | DF06 | DF08 | DF10 | units |
|---|--------|-------------|------|------|------|------|------|------|-------|
| Maximum Recurrent Peak Reverse Voltage | Vrrm | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | v |
| Maximum RMS Voltage | Vrms | 35 | 70 | 140 | 280 | 420 | 560 | 700 | v |
| Maximum DC blocking Voltage | Vdc | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | v |
| Maximum Average Forward Rectified current at Ta=40 °C | If(av) | 1 | | | | | | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load | Ifsm | 50 | | | | | | | A |
| Maximum Instantaneous Forward Voltage at forward current 1.0A | Vf | 1.1 | | | | | | | V |
| Maximum DC Reverse Voltage Ta=25 °C | Ir | 10.0 | | | | | | | μ A |
| at rated DC blocking voltage Ta=125 °C | | 500 | | | | | | | μ A |
| Typical Junction Capacitance | Cj | 25 | | | | | | | pF |
| Operating Temperature Range | Tj | -55 to +125 | | | | | | | °C |
| Storage and operation Junction Temperature | Tstg | -55 to +150 | | | | | | | °C |

Note:

- Measure at 1MHZ and applied reverse voltage of 4.0 volt

RATINGS AND CHARACTERISTIC CURVES DF005 THRU DF10

FIG.1-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

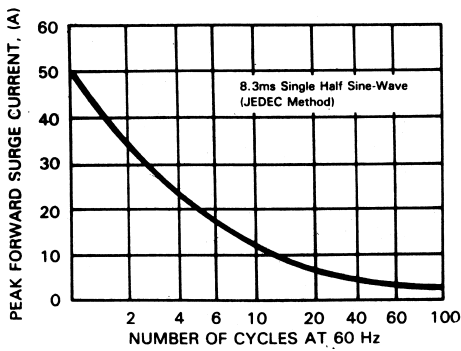


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

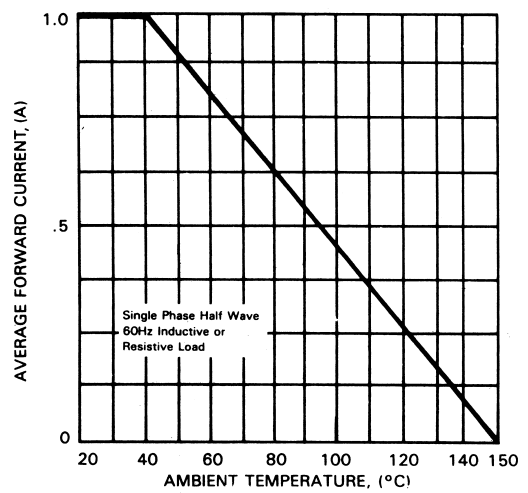


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

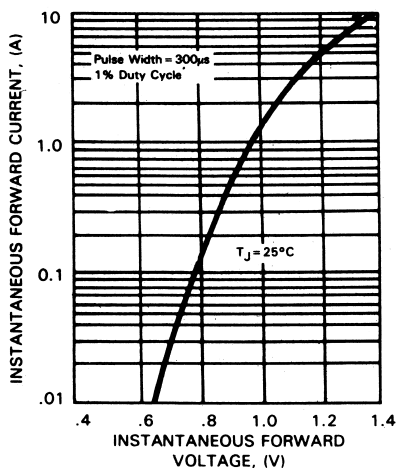


FIG.4-TYPICAL REVERSE CHARACTERISTICS

