

CE

CHENYI ELECTRONICS

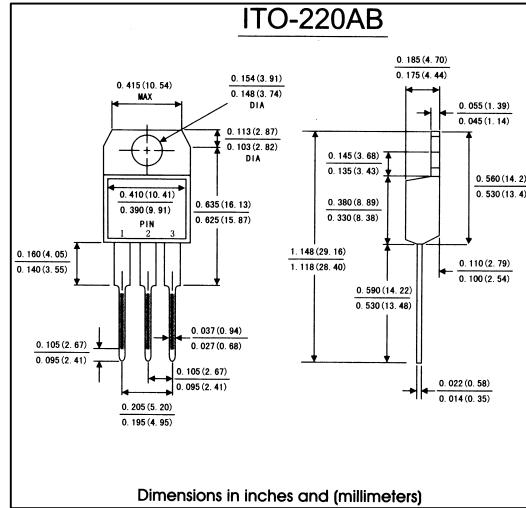
SRF1020 THRU SRF10A0**SCHOTTKY BARRIER RECTIFIER****Reverse Voltage - 20 to 100 Volts****Forward Current - 10.0Amperes****FEATURES**

- . Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- . Metal silicon junction ,majority carriet conduction
- . Guard ring for overvoltage protection
- . Low power loss,high efficiency
- . High current capability ,Low forward voltage drop
- . High surge capability
- . For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- . Dual rectifier construction
- . High temperature soldering guaranteed: 250°C/10 seconds

0.25"(6.35mm)from case

MECHANICAL DATA

- . **Case:** JEDEC DO-220AB molded plastic body
- . **Terminals:** lead solderable per MIL-STD-750,method 2026
- . **Polarity:** As marked. No suffix indicates Common Cathode, suffix"A" indicates Common Anode
- . **Mounting Position:** Any
- . **Weight:** 0.08 ounce, 2.24 grams



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase,half wave,resistive or inductive) load. For capacitive load,derate by 20%)

	Symbols	SR1020	SR1030	SR1040	SR1050	SR1060	SR1080	SR10A0	Units			
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	Volts			
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	57	71	Volts			
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	Volts			
Macimum average forward rectified current(see Fig.1)	I _(AV)	10.0							Amps			
Repetitive peak forward current(square wavr, 20KHz) at T _c =105°C	I _{FRM}	20.0							Amps			
Peak forward surge current 8.3ms singel half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150.0							Amps			
Maximum instantaneous forward voltage at 10 A(Note 1)	V _F	0.70		0.8		0.80		0.85	Volts			
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25°C TA=125°C	IR	1.0					mA				
			50		25							
Typeical thermal resistance(Note 2)	R _θ _{JC}	2.5							°C/W			
Operating junction temperature range	T _J	-65 to +125				-65 to +150						
storage temperature range	T _{STG}	-65 to +150							°C			

Notes: 1. Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance from juntion to case

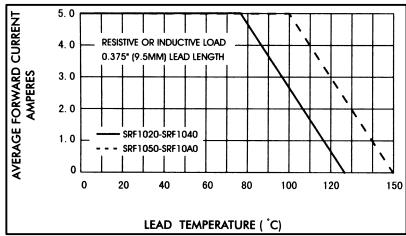
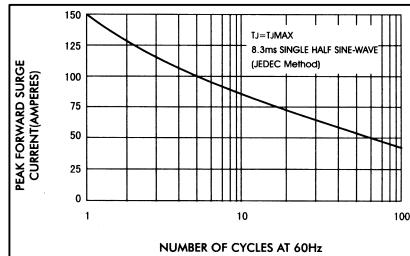
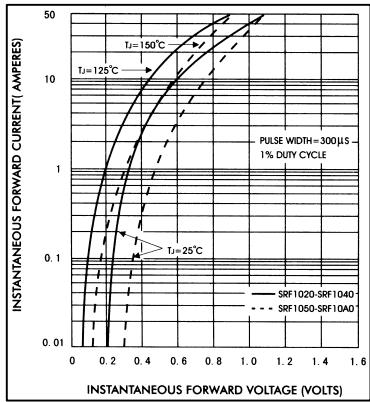
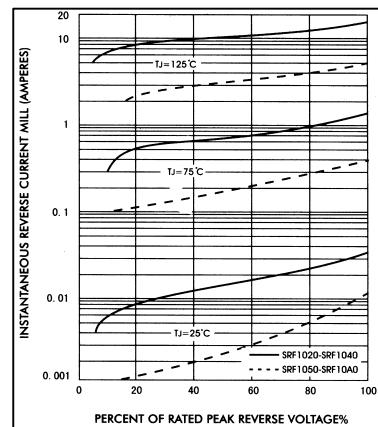
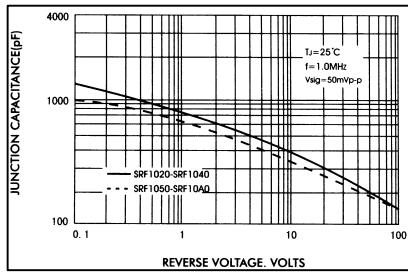
CE

CHENYI ELECTRONICS

SRF1020 THRU SRF10A0**SCHOTTKY BARRIER RECTIFIER**

Reverse Voltage - 20 to 100 Volts

Forward Current - 10.0 Amperes

RATINGS AND CHARACTERISTIC CURVES SRF1020 THRU SRF10A0**FIG.1-FORWARD CURRENT DERATING CURVE****FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT****FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS****FIG.4-TYPICAL REVERSE CHARACTERISTICS****FIG.5-TYPICAL JUNCTION CAPACITANCE****FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE**