

SANYO	No.2616A	LB1636M
	Low-Saturation Bidirectional Motor Driver for Low-Voltage Applications	

The LB1636M is a low-saturation bidirectional motor driver IC for use in low-voltage applications. It is especially suited for use in small-sized low-voltage motors for printers, cassette tape recorders, and commercial equipment.

Features

- . Low-voltage (2.5V min) operation, low current dissipation ($I_{CC} \leq 30\mu A$) at the standby mode
- . Low-saturation voltage (upper transistor + lower transistor residual voltage 1.2V max at 400mA)
- . On-chip spark killer diodes


Absolute Maximum Ratings at $T_a = 25^\circ C$

			unit
Maximum Supply Voltage	$V_{CC \text{ max}}$	-0.3 to +7.0	V
Output Supply Voltage	V_{OUT}	-0.3 to $V_{CC} + V_F$	V
Input Supply Voltage	V_{IN}	-0.3 to +7.0	V
Allowable Load Resistance	$R_M \text{ min}$	Pulse width < 50ms Duty 10%	3 ohm
GND Pin Flow-out Current	I_{GND}	Pulse width < 50ms Duty 10%	1 A
Allowable Power Dissipation	$P_d \text{ max}$		380 mA
Operating Temperature	T_{opr}	-20 to +75	$^\circ C$
Storage Temperature	T_{stg}	-40 to +125	$^\circ C$

Allowable Operating Conditions at $T_a = 25^\circ C$


			unit
Supply Voltage	V_{CC}	2.5 to 6.0	V
Input "H"-Level Voltage	V_{IH}	2.0 to 6.0	V
Input "L"-Level Voltage	V_{IL}	-0.3 to +0.7	V

Equivalent Circuit

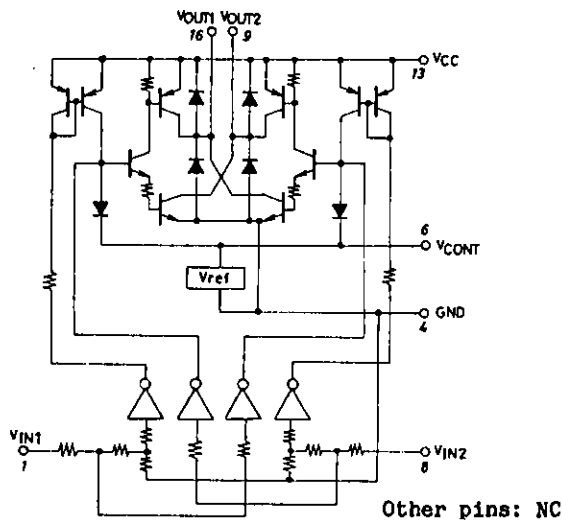


Package Dimensions 3035A

unit: mm

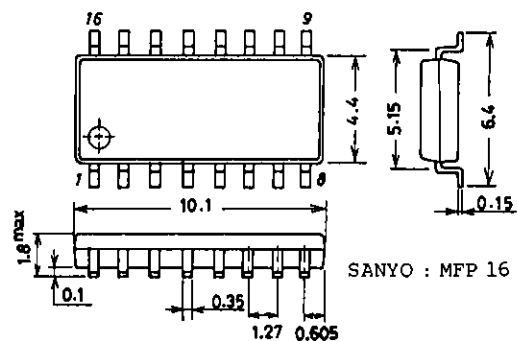


Electrical Characteristics at Ta=25°C

		min	typ	max	unit
Output Saturation Voltage (upper side + lower side)	$V_{OUT(1)}$ $V_{OUT(2)}$	$V_{CC}=3V, V_{IN}=3V, I_{OUT}=200mA$ $V_{CC}=3.5V, V_{IN}=3V, I_{OUT}=400mA$		0.6 1.2	V
Output Sustain Voltage	$V_o(sus)$	$I_{OUT}=400mA$	9		V
Output Leakage Current	$I_o(leak)$	$V_{CC}=6V$		30	μA
Input Current	I_{IN}	$V_{IN}=6V$		1.0	mA
Spark Killer Diode					
Reverse Current	$I_S(leak)$	$V_{CC}=6V, V_{IN}=0V$		30	μA
Forward Current	V_{SF}	$I_{OUT}=500mA$		1.7	V
Current Dissipation	I_{CC}	$V_{CC}=3.5V, V_{IN}=3V, I_{OUT}=400mA$		430	mA

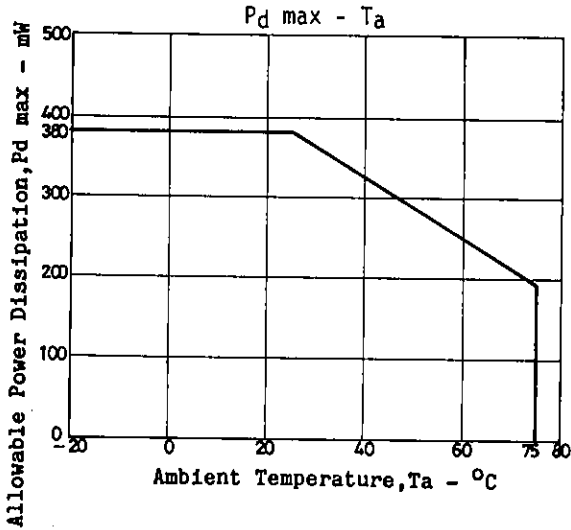

Sample Application Circuit

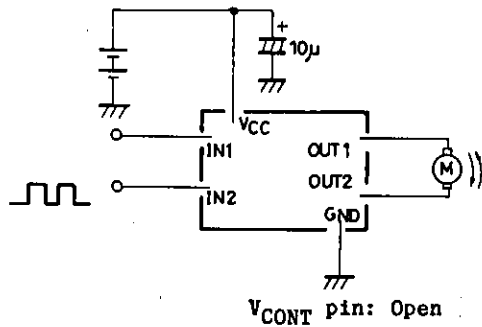

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.