



No.2015A

2 S C 3 8 0 8

NPN Epitaxial Planar Silicon Transistor
 HIGH h_{FE}, LOW FREQUENCY
 GENERAL-PURPOSE AMP APPLICATIONS

Applications

- Low frequency general-purpose amplifiers, drivers

Features

- Large current capacity (I_C=2A)
- Adoption of MBIT process
- High DC current gain (h_{FE}=800 to 3200)
- Low collector-to-emitter saturation voltage (V_{CE(sat)} ≤ 0.5V)
- High V_{EBO} (V_{EBO} ≥ 15V)

Absolute Maximum Ratings at Ta=25°C


			unit
Collector to Base Voltage	V _{CB0}	80	V
Collector to Emitter Voltage	V _{CEO}	60	V
Emitter to Base Voltage	V _{EBO}	15	V
Collector Current	I _C	2	A
Peak Collector Current	i _{cp}	4	A
Collector Dissipation	P _c	1.2	W
	T _c =25°C	15	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C

Electrical Characteristics at Ta=25°C

		min	typ	max	unit
Collector Cutoff Current	I _{CBO} V _{CB} =50V, I _E =0			1	μA
Emitter Cutoff Current	I _{EBO} V _{EB} =10V, I _C =0			1	μA
DC Current Gain	h _{FE} (1) V _{CE} =5V, I _C =500mA	800	1500	3200	
	h _{FE} (2) V _{CE} =5V, I _C =1A	600			
Gain-Bandwidth Product	f _T V _{CE} =10V, I _C =50mA		170		MHz
Output Capacitance	c _{ob} V _{CE} =10V, f _C =1MHz		24		pF
Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =1A, I _B =20mA		0.2	0.5	V
Base to Emitter Saturation Voltage	V _{BE(sat)} I _C =1A, I _B =20mA		0.87	1.2	V
Collector to Base Breakdown Voltage	V _{(BR)CBO} I _C =10μA, I _E =0	80			V

Continued on next page.

Package Dimensions 2043A
 (unit: mm)





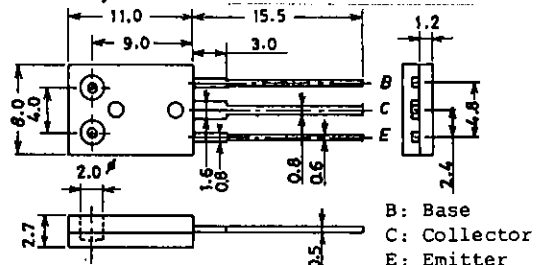








SANYO: TO126LP

Continued from preceding page.

			min	typ	max	unit
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1mA, R_{BE}=\infty$	60			V
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	15			V
Turn-on Time	t_{on}	See specified Test Circuit.		0.23		μs
Storage Temperature	t_{stg}	"		2.7		μs
Fall Time	t_f	"		0.75		μs

Switching Time Test Circuit

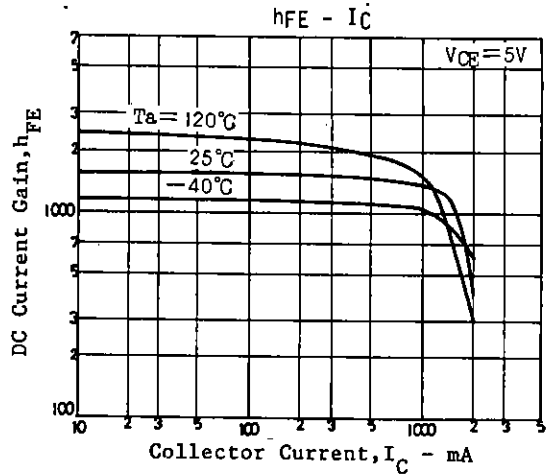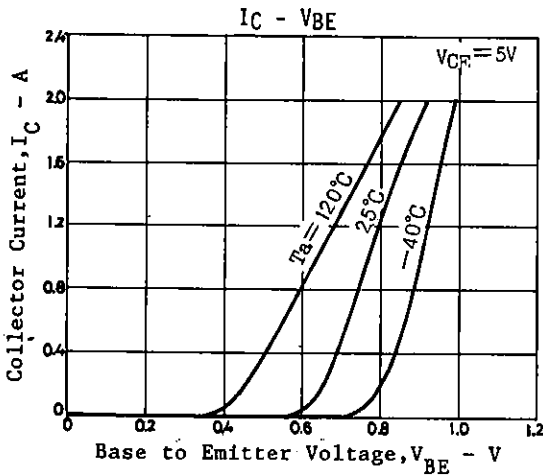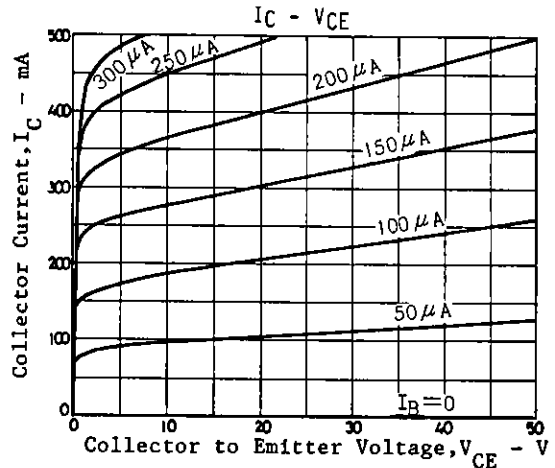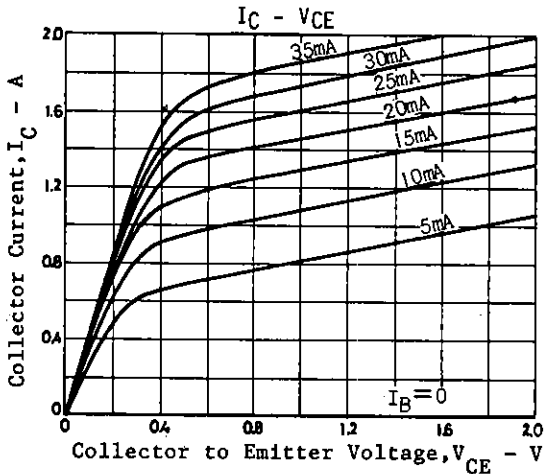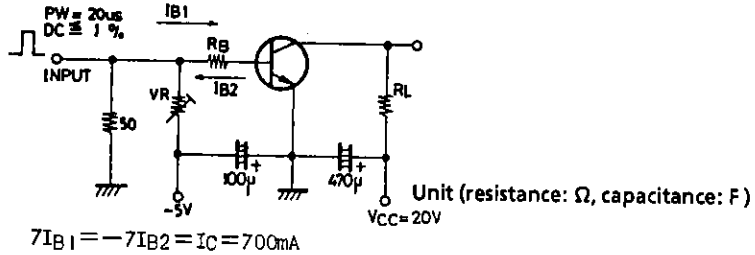

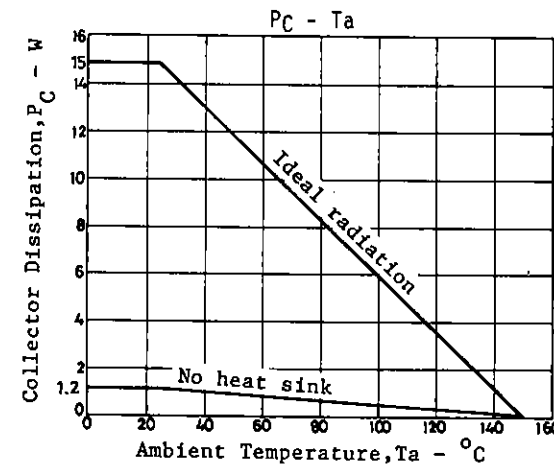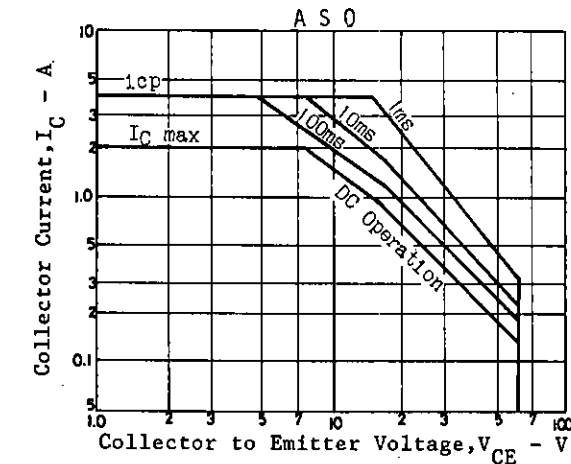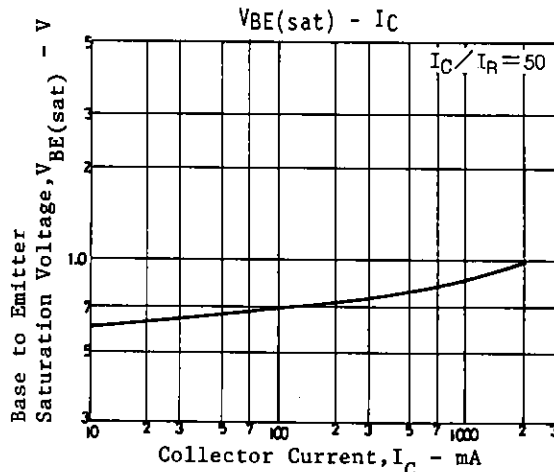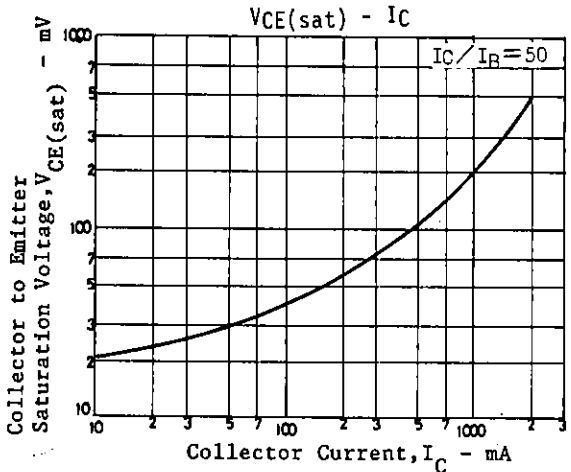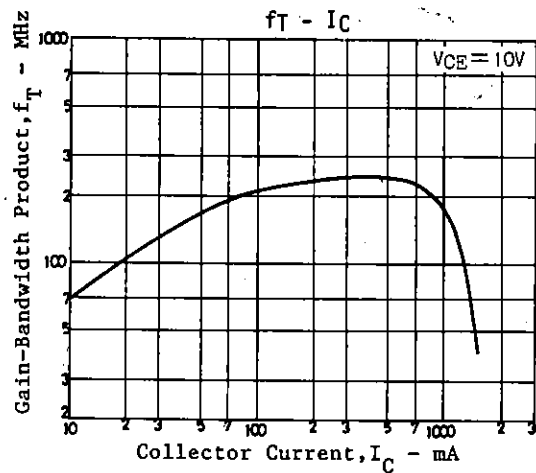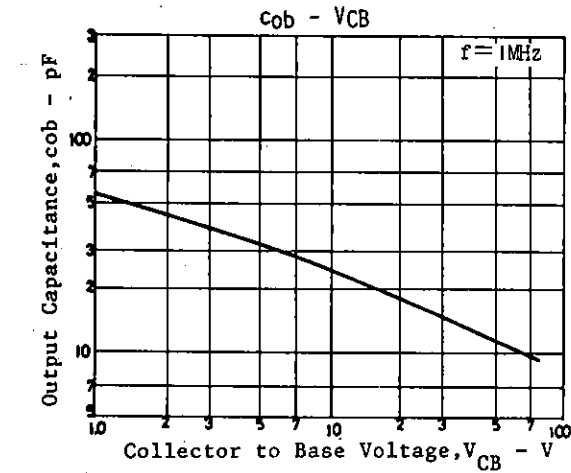

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/prime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.