



EC3H05B


VHF to UHF Wide-Band Low-Noise Amplifier Applications

Features

- Low noise : NF=1.2dB typ (f=1GHz).
- High gain : $|S_{21e}|^2=13\text{dB}$ typ (f=1GHz).
- High cutoff frequency : $f_T=9.0\text{GHz}$ typ.
- Ultraminiature (1006 size) and thin (0.5mm) leadless package.

Package Dimensions

unit : mm
2183

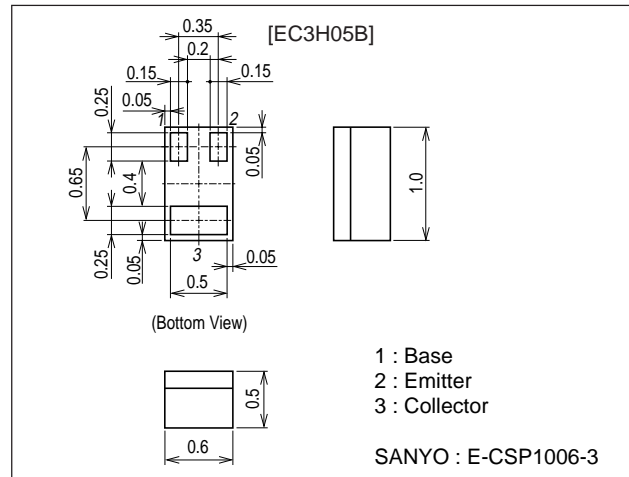

Specifications

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CB0}		16	V
Collector-to-Emitter Voltage	V_{CE0}		8	V
Emitter-to-Base Voltage	V_{EB0}		1.5	V
Collector Current	I_C		50	mA
Collector Dissipation	P_C		100	mW
Junction Temperature	T_j		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a=25^\circ\text{C}$


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=10\text{V}, I_E=0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=1\text{V}, I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=15\text{mA}$	100		180	
Gain Bandwidth Product	f_T	$V_{CE}=5\text{V}, I_C=15\text{mA}$		9.0		GHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$		0.55	1.2	pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{CE}=5\text{V}, I_C=15\text{mA}, f=1\text{GHz}$	10	13		dB
Noise Figure	NF	$V_{CE}=5\text{V}, I_C=5\text{mA}, f=1\text{GHz}$		1.2	2.5	dB

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


Type No. Indication (Top view)









Electrical Connection (Top view)

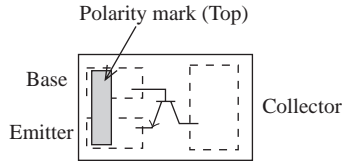


*Electrodes : on the bottom

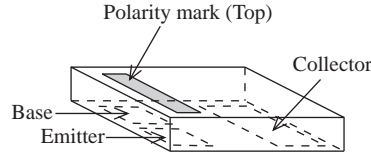

This product adopts a high-frequency process. Please be careful when handling it because it is susceptible to static electricity.

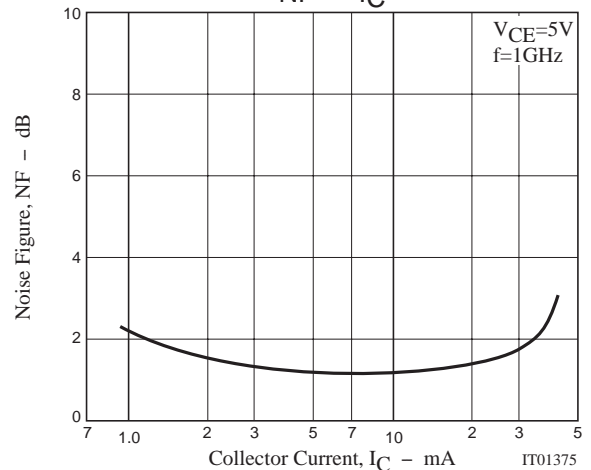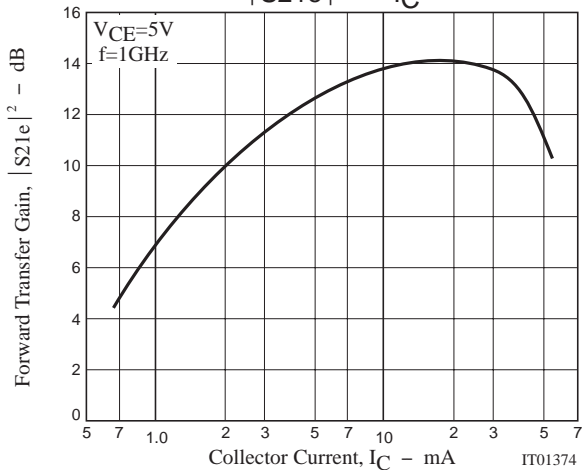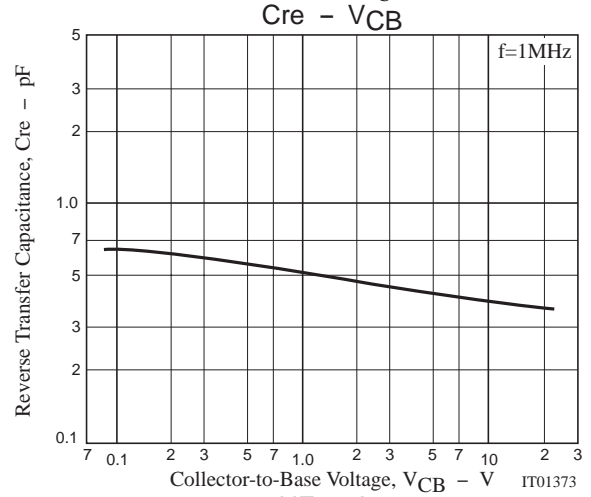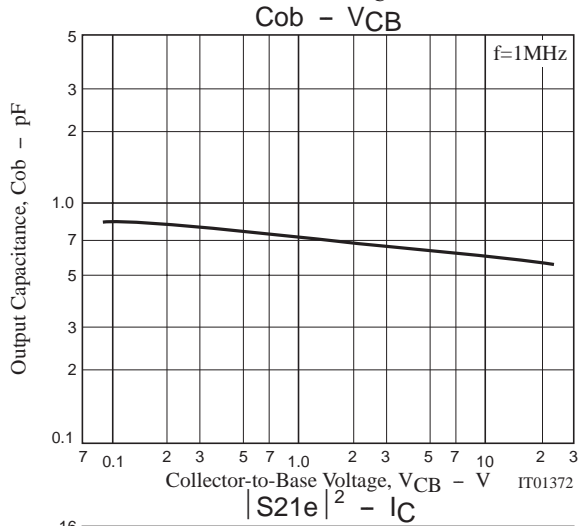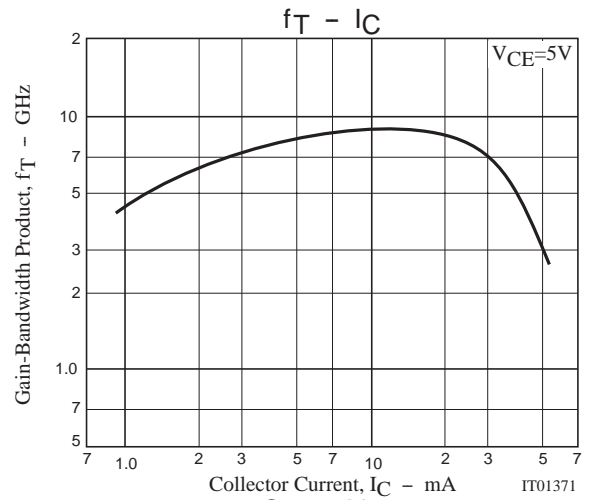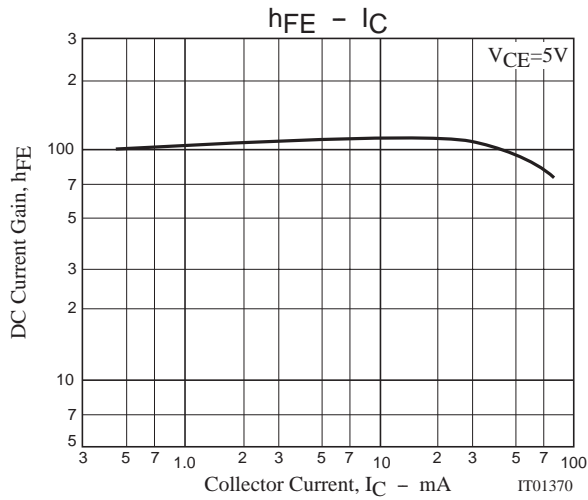

EC3H05B

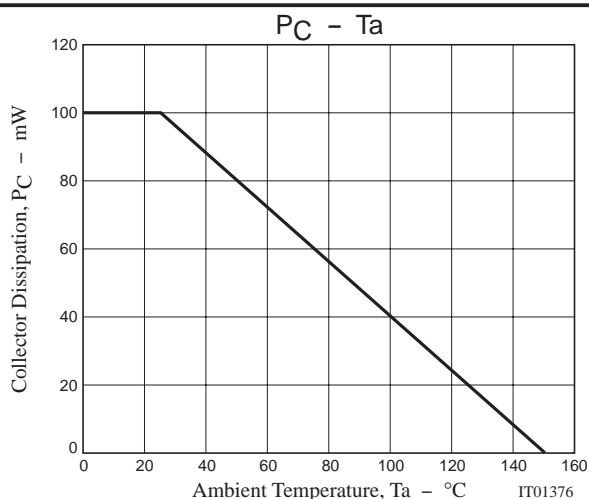

S Parameters (Common emitter)

$V_{CE}=1V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.964	-14.7	3.332	168.4	0.039	80.6	0.987	-7.4
200	0.944	-28.5	3.286	157.5	0.075	71.2	0.960	-14.4
400	0.886	-54.5	2.977	138.4	0.132	55.9	0.879	-26.3
600	0.819	-76.8	2.529	122.1	0.168	44.4	0.789	-35.6
800	0.766	-94.6	2.223	109.1	0.190	35.9	0.714	-42.2
1000	0.737	-108.1	2.010	98.2	0.200	29.6	0.663	-47.1
1200	0.701	-120.2	1.742	89.2	0.206	24.8	0.620	-51.7
1400	0.681	-129.2	1.593	81.6	0.204	21.3	0.591	-54.9
1600	0.672	-136.9	1.474	74.1	0.203	19.3	0.577	-58.5
1800	0.663	-144.5	1.337	67.3	0.198	18.3	0.567	-62.2
2000	0.653	-150.6	1.234	61.6	0.193	17.9	0.560	-65.5

$V_{CE}=1V, I_C=3mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.908	-23.1	8.754	162.7	0.038	76.1	0.955	-14.7
200	0.849	-46.3	7.966	147.9	0.068	63.6	0.864	-28.1
400	0.745	-81.4	6.727	123.5	0.106	48.5	0.693	-44.0
600	0.673	-104.6	5.005	110.1	0.120	40.6	0.541	-55.0
800	0.625	-122.4	3.985	99.4	0.126	37.2	0.439	-62.2
1000	0.586	-137.2	3.419	90.7	0.136	34.7	0.409	-64.8
1200	0.581	-143.8	2.929	83.9	0.142	34.4	0.377	-67.5
1400	0.573	-149.7	2.561	78.1	0.151	33.5	0.371	-69.0
1600	0.566	-155.6	2.250	72.9	0.152	36.3	0.338	-72.9
1800	0.555	-161.3	2.024	68.1	0.154	38.3	0.322	-76.4
2000	0.546	-167.2	1.856	63.3	0.161	41.9	0.300	-79.5

$V_{CE}=1V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.726	-50.3	20.231	149.3	0.032	65.0	0.847	-30.5
200	0.647	-85.2	15.627	128.7	0.051	54.0	0.653	-50.4
400	0.570	-124.4	9.732	107.4	0.067	46.6	0.411	-71.5
600	0.545	-142.7	6.844	96.7	0.079	47.9	0.302	-81.4
800	0.534	-153.7	5.269	89.1	0.090	50.1	0.249	-87.9
1000	0.527	-160.6	4.282	83.4	0.102	51.6	0.217	-93.1
1200	0.522	-166.5	3.635	78.3	0.115	54.2	0.198	-96.8
1400	0.518	-171.1	3.134	74.0	0.127	56.1	0.186	-100.1
1600	0.514	-174.9	2.769	70.1	0.141	56.3	0.178	-102.5
1800	0.512	-177.9	2.493	66.1	0.154	57.7	0.172	-106.1
2000	0.511	-178.9	2.269	62.3	0.168	57.9	0.165	-107.6

EC3H05B

$V_{CE}=5V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.967	-13.1	3.456	169.7	0.030	81.1	0.991	-5.8
200	0.952	-25.5	3.377	159.9	0.058	73.7	0.971	-11.4
400	0.902	-49.2	3.116	142.5	0.104	59.9	0.909	-21.1
600	0.840	-70.2	2.696	127.1	0.135	48.5	0.835	-28.9
800	0.787	-87.6	2.359	114.6	0.155	40.4	0.771	-34.7
1000	0.757	-101.1	2.164	103.6	0.164	34.1	0.726	-39.1
1200	0.718	-113.5	1.887	95.0	0.171	29.6	0.685	-43.0
1400	0.696	-122.8	1.742	87.3	0.171	26.1	0.660	-45.8
1600	0.684	-131.2	1.614	79.7	0.169	24.2	0.645	-49.2
1800	0.670	-139.1	1.463	72.9	0.165	23.5	0.634	-52.4
2000	0.658	-145.6	1.350	67.2	0.161	23.5	0.625	-55.4

$V_{CE}=5V, I_C=5mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.871	-24.8	13.419	161.4	0.025	75.3	0.951	-13.6
200	0.797	-49.1	11.836	146.1	0.044	65.2	0.856	-25.3
400	0.681	-83.3	9.073	123.5	0.068	51.9	0.670	-38.5
600	0.599	-106.6	6.968	109.5	0.079	46.6	0.540	-44.4
800	0.551	-123.1	5.465	100.3	0.086	46.4	0.455	-47.4
1000	0.516	-135.9	4.585	92.5	0.095	46.9	0.419	-49.0
1200	0.505	-143.2	3.943	86.0	0.100	48.4	0.394	-49.9
1400	0.496	-150.0	3.488	80.5	0.111	49.5	0.385	-51.3
1600	0.490	-155.2	3.054	76.1	0.117	51.6	0.363	-52.7
1800	0.481	-159.9	2.741	71.9	0.125	53.6	0.351	-54.3
2000	0.476	-164.8	2.455	67.4	0.132	55.8	0.340	-55.6

$V_{CE}=5V, I_C=15mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.699	-45.3	25.810	150.1	0.021	71.4	0.868	-23.7
200	0.602	-79.0	19.948	129.9	0.034	58.2	0.684	-38.1
400	0.506	-117.1	12.414	109.1	0.048	54.0	0.457	-48.4
600	0.469	-136.6	8.786	98.5	0.058	54.9	0.358	-50.1
800	0.455	-148.1	6.747	91.3	0.069	59.3	0.304	-50.5
1000	0.447	-155.8	5.482	85.8	0.081	60.8	0.277	-50.9
1200	0.440	-161.4	4.643	80.9	0.092	63.0	0.262	-51.2
1400	0.437	-166.2	4.009	76.8	0.103	63.9	0.253	-51.9
1600	0.434	-170.0	3.532	73.0	0.115	65.1	0.248	-53.3
1800	0.431	-172.6	3.163	69.5	0.127	65.7	0.242	-54.7
2000	0.432	-176.0	2.871	65.5	0.140	66.9	0.240	-55.1

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 2000. Specifications and information herein are subject to change without notice.