


SLA3005M/3006M/3007M

4-Output, Low Dropout Voltage Dropper Type for USB Hub

■Features

- 4 regulators combined in one package
- Insulated single inline package
- SLA3005M/3006M with 5V/0.5A × 4 outputs and SLA3007M with 5V/0.5A × 3, 3.3V/0.5A × 1 outputs
- Low dropout voltage: $V_{DIF} \leq 0.5V$ (at $I_o = 0.5A$)
- Output-independent ON/OFF control terminal compatible with LS-TTL (Active High)
- Output-independent overcurrent and thermal protection circuits built in
- Open collector flag-output terminals built in to output OCP operation to each output terminal (Active Low)
- SLA3005M/3007M (excluding Reg4) for V_o shutdown after OCP operation and SLA3006M for continuous OCP operation
- Built-in anti-malfunction delay circuit whose time can be set with an external capacitor

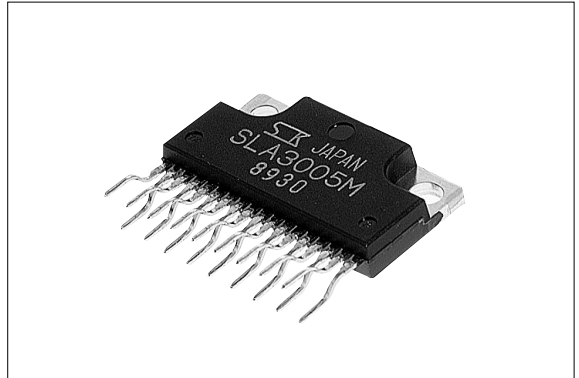

■Applications

- USB hub power supplies
- Electronic equipment

■Absolute Maximum Ratings

($T_a = 25^\circ C$)

| Parameter | Symbol | Ratings | | Unit |
|--|---------------|--|----------|--------------|
| | | SLA3005M/3006M | SLA3007M | |
| DC Input Voltage | V_{IN} | 20 | 18 | V |
| Voltage of Output Control Terminal | V_C | V_{IN} | | V |
| DC Output Current | I_o | 0.5 | | A |
| Power Dissipation | P_{D1} | 30(With infinite heatsink) | | W |
| | P_{D2} | 3.36(Without heatsink, stand-alone operation) | | W |
| Junction Temperature | T_j | -30 to +125 | | $^\circ C$ |
| Ambient Operating Temperature | T_{OP} | -30 to +100 | | $^\circ C$ |
| Storage Temperature | T_{stg} | -30 to +125 | | $^\circ C$ |
| Thermal Resistance (junction-to-case) | $R_{t(j-c)}$ | 9.0 | | $^\circ C/W$ |
| Thermal Resistance (junction-to-ambient air) | $R_{th(j-a)}$ | 29.8(Without heatsink, stand-alone operation)5V/0.5A × 4 | | $^\circ C/W$ |

■Recommended Operating Conditions

| Parameter | Symbol | Ratings | Unit |
|--------------------------------------|-----------|-------------|------------|
| DC Input Voltage Range | V_{IN} | 5.5 to 10 | V |
| Output Current Range | I_o | 0 to 0.5 | A |
| Operating Junction Temperature Range | T_{jop} | -20 to +100 | $^\circ C$ |
| Ambient Operating Temperature Range | T_{aop} | -20 to +85 | $^\circ C$ |

■Electrical Characteristics

(Ta=25°C unless otherwise specified)

| Parameter | SYMBOL | Ratings | | | | | | | | | | | Unit | | |
|---|------------------------------|--|---------|-------|--|---------|-------|--|---------|-------|--|-------|-------|-------|----|
| | | SLA3005M | | | SLA3006M | | | SLA3007M | | | | | | | |
| | | min. | typ. | max. | min. | typ. | max. | Regulator1, 2, 3 | | | Regulator4 | | | | |
| | | | | | | | min. | typ. | max. | min. | typ. | max. | | | |
| Output Voltage | Vo | 4.85 | 5.00 | 5.15 | 4.85 | 5.00 | 5.15 | 4.85 | 5.00 | 5.15 | 3.234 | 3.300 | 3.366 | V | |
| | Conditions | VIN=7V, Io=0.1A | | | VIN=7V, Io=0.1A | | | VIN=7V, Io=0.1A | | | VIN=7V, Io=0.1A | | | | |
| Dropout Voltage | VDIF | | | 0.5 | | | 0.5 | | | 0.5 | | | 2.0 | V | |
| | Conditions | Io≤0.5A | | | Io≤0.5A | | | Io≤0.5A | | | Io≤0.5A | | | | |
| Line Regulation | ΔV _{OLINE} | | | 30 | | | 30 | | | 30 | | | 30 | mV | |
| | Conditions | VIN=6 to 15V, Io=0.1A | | | VIN=6 to 15V, Io=0.1A | | | VIN=6 to 15V, Io=0.1A | | | VIN=6 to 15V, Io=0.1A | | | | |
| Load Regulation | ΔV _{OLOAD} | | | 50 | | | 50 | | | 50 | | | 30 | mV | |
| | Conditions | VIN=7V, Io=0 to 0.5A | | | VIN=7V, Io=0 to 0.5A | | | VIN=7V, Io=0 to 0.5A | | | VIN=7V, Io=0 to 0.2A | | | | |
| Temperature Coefficient of Output Voltage | ΔVo/ΔTa | | ±0.5 | | | ±0.5 | | | ±0.5 | | | ±0.3 | | mV/°C | |
| | Conditions | VIN=7V, Io=5mA, Tj=-10 to 100°C | | | VIN=7V, Io=5mA, Tj=-10 to 100°C | | | VIN=7V, Io=5mA, Tj=-10 to 100°C | | | VIN=7V, Io=5mA, Tj=-10 to 100°C | | | | |
| Quiescent Circuit Current*3 | Iq | | | 20 | | | 20 | | | 20 | — | | | mA | |
| | Conditions | VIN=7V, Io=0A | | | VIN=7V, Io=0A | | | VIN=7V, Io=0A | | | VIN=7V, Io=0A | | | | |
| Quiescent Circuit Current (Output OFF)*3 | Iq(off) | | | 0.5 | | | 0.5 | | | 0.5 | — | | | mA | |
| | Conditions | VIN=7V, Vc1 to 4=0V | | | VIN=7V, Vc1 to 4=0V | | | VIN=7V, Vc1 to 4=0V | | | VIN=7V, Vc1 to 4=0V | | | | |
| Overcurrent Protection Starting Current*1 | Is1 | 0.55 | | 0.65 | 0.75 | | 0.96 | 0.55 | | 0.65 | 0.55 | | 0.65 | A | |
| | Conditions | VIN=7V | | | VIN=7V | | | VIN=7V | | | VIN=7V | | | | |
| Vc Terminal ² | Control Voltage (Output ON) | Vc. IH | 2.0 | | | 2.0 | | | 2.0 | | | 2.0 | | V | |
| | Control Voltage (Output OFF) | Vc. IL | | | 0.7 | | | 0.7 | | | 0.7 | | 0.7 | | |
| | Control Current (Output ON) | Ic. IH | | | 50 | | | 50 | | | 50 | | 50 | μA | |
| | Conditions | Vc=2.7V | | | Vc=2.7V | | | Vc=2.7V | | | Vc=2.7V | | | | |
| | Control Current (Output OFF) | Ic. IL | | | -100 | | | -100 | | | -100 | | | -100 | μA |
| Conditions | Vc=0V | | | Vc=0V | | | Vc=0V | | | Vc=0V | | | | | |
| OCP Detection Voltage Level | V _{oth} | 3.7 | 4.0 | 4.3 | 3.7 | 4.0 | 4.3 | 3.7 | 4.0 | 4.3 | — | | | V | |
| Delay Threshold Voltage | V _{DLYth} | 2.1 | 2.3 | 2.5 | 2.1 | 2.3 | 2.5 | 2.1 | 2.3 | 2.5 | — | | | V | |
| Delay Terminal Runoff Current | IDLY | 35 | 50 | 65 | 35 | 50 | 65 | 35 | 50 | 65 | — | | | μA | |
| Flag Output Terminal | Before OCP Detection | V _{FLGh} | VIN-0.4 | | | VIN-0.4 | | | VIN-0.4 | | | — | | | V |
| | Conditions | R _{FLG} connected between FLG and VIN | | | R _{FLG} connected between FLG and VIN | | | R _{FLG} connected between FLG and VIN | | | R _{FLG} connected between FLG and VIN | | | | |
| After OCP Detection | V _{FLGi} | | | 0.5 | | | 0.5 | | | 0.5 | — | | | V | |
| | Conditions | IFLG=1mA | | | IFLG=1mA | | | IFLG=1mA | | | IFLG=1mA | | | | |

*1 Is1 is specified at -5(%) drop point of output voltage Vo on the condition that VIN = 7V, Io = 0.1A.


*2 Output is ON even when output control terminal Vc is open. Each input level is equivalent to LS-TTL. Therefore, it may be directly driven by an LS-TTL circuit.

*3 Total of four circuits

*4 The FLG output latched by delay DLY after OCP detection. (SLA3005M/3007M(Reg1 to 3) shuts down the output voltage simultaneously at latching.) Set the VIN or Vc to low to reset latching. Leave a time lag of Cd × 600s or more before restart.

■Outline Drawing


(unit:mm)

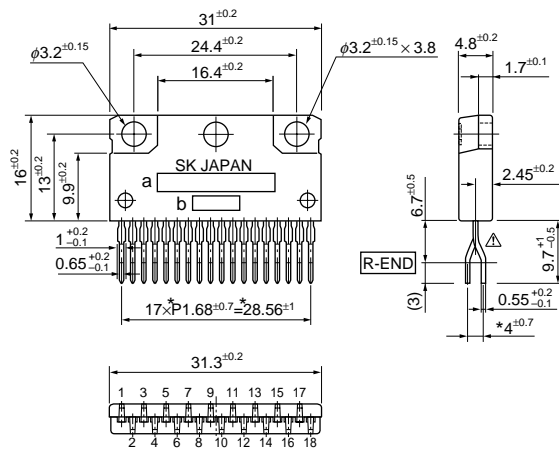


- | | | |
|--------|--------------------------|----------------|
| ① Vc1 | ⑩ FLG3 | a. Part Number |
| ② FLG1 | ⑪ DLY | b. Lot Number |
| ③ DLY1 | ⑫ Vo3 | |
| ④ Vo1 | ⑬ GND | |
| ⑤ Vc2 | ⑭ Vc4 | |
| ⑥ FLG2 | ⑮ FLG4(N. C on SLA3007M) | |
| ⑦ DLY2 | ⑯ DLY4(N. C on SLA3007M) | |
| ⑧ Vo2 | ⑰ Vo4 | |
| ⑨ Vc3 | ⑱ VIN | |

Weight:Approx. 6g

■Block Diagram

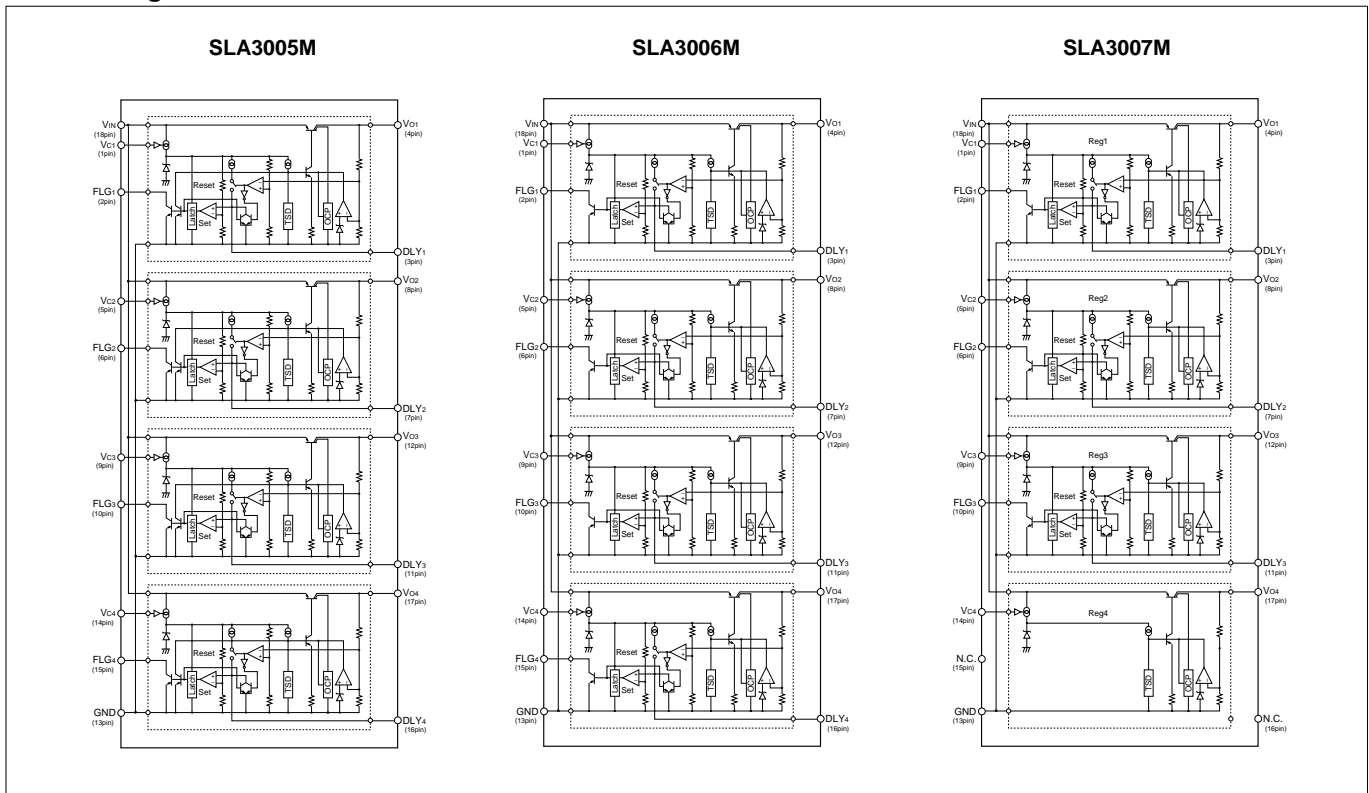


■Standard External Circuit

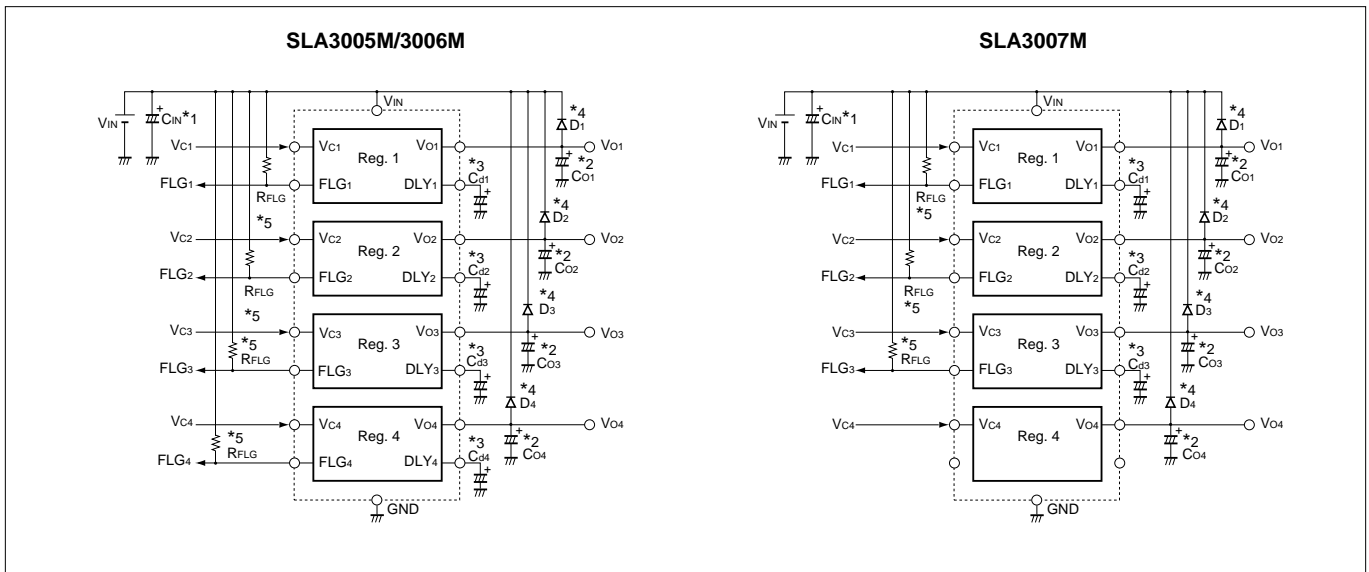


- *1 C_{IN} : Input capacitor (Approx. 47μF)
This capacitor is required if the input line is inductive and in the case of long wiring.
- *2 C_O : Output capacitor (47 to 220μF)
- *3 C_d : Delay setting capacitor (0.1μF or more)
Use C_d to set the delay time (t_{DLY}) from when a low V_O level due to OCP operation is detected until a flag signal is output. This prevents a rush current from causing malfunction.
Approximate calculation: $t_{DLY} \approx (C_d \times V_{DLYth}) / I_{DLY} [sec]$
When using soft start on V_{IN} or if C_{IN} has a large capacitance, set t_{DLY} long enough for the output voltage to rise sufficiently. Be sure to connect C_d and do not use it for other applications, such as short circuiting C_d.
- *4 D₁ to D₄ : Reverse biasing protection diode
This diode is required for protection against reverse biasing of the input and output.
- *5 R_{FLG} : Set this to limit the inflow current into the FLG terminal to 1mA or less.

■T_a-P_d Characteristics

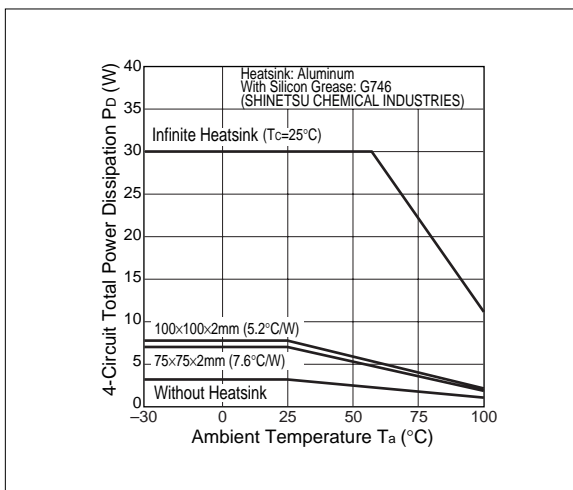

■Timing Charts

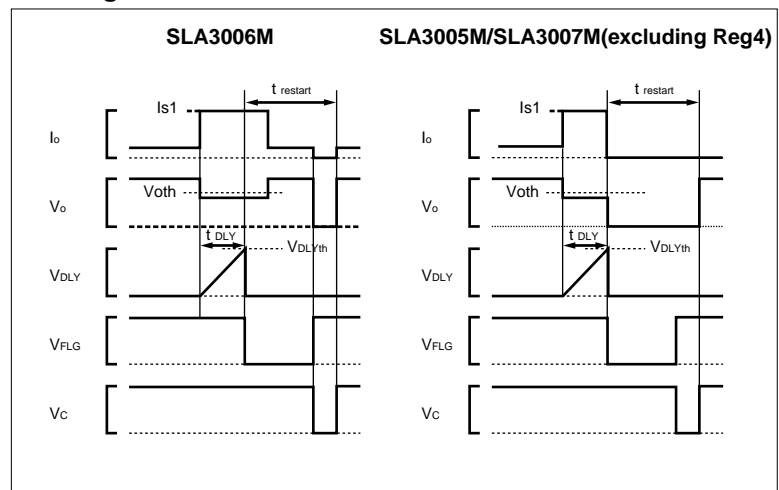

■Calculating the internal dissipation

P_D is calculated as follows:

$$P_D = [I_{O1} \cdot (V_{IN} - V_{O1})] + [I_{O2} \cdot (V_{IN} - V_{O2})] + [I_{O3} \cdot (V_{IN} - V_{O3})] + [I_{O4} \cdot (V_{IN} - V_{O4})] + V_{IN} \cdot I_G$$

■Estimating T_j by heat measurement


1. Measuring position: At the root of pin 13
2. Add the thermal resistance "θ_{j-L}" between the junction and pin 13 and the P_d product of each channel to the measured temperature.
θ_{j-L} is as follows : θ_{j-L1}:8°C/W, θ_{j-L2}:7°C/W, θ_{j-L3}:5°C/W, θ_{j-L4}:8°C/W
The calculation formula is as follows : T_j=θ_{j-L1}•Pd1+θ_{j-L2}•Pd2+θ_{j-L3}•Pd3+θ_{j-L4}•Pd4+T_{13pin}

Typical Characteristics


($T_a=25^\circ\text{C}$)

SLA3005M


Io vs. VDIF Characteristics

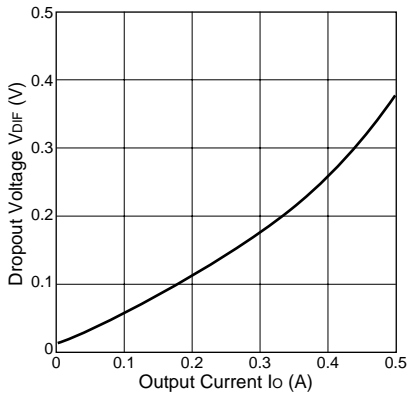


Rise Characteristics

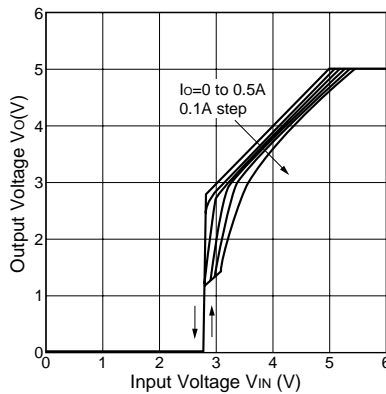


Quiescent Circuit Current

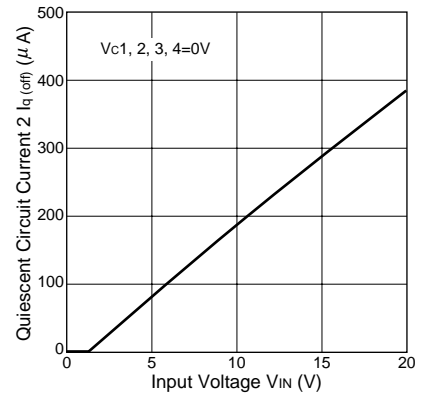


Circuit Current 1-Circuit

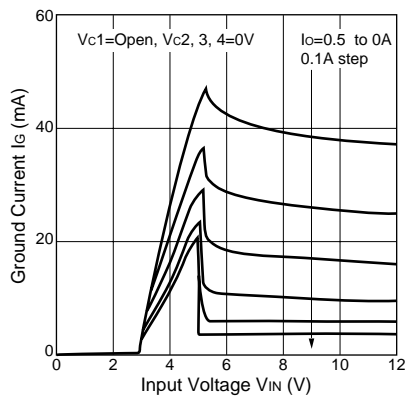


Circuit Current 4-Circuits

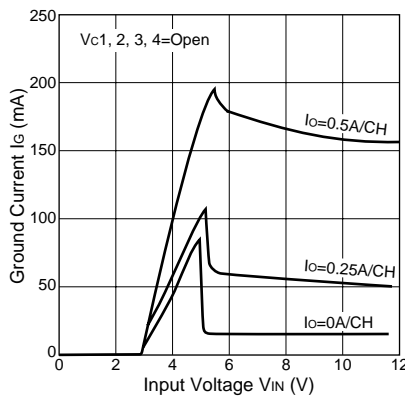


Overcurrent Protection Characteristics

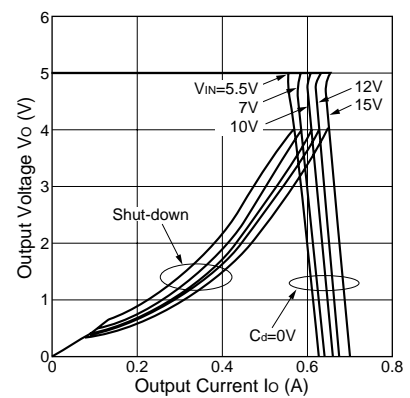


VIN vs. IS1 Characteristics

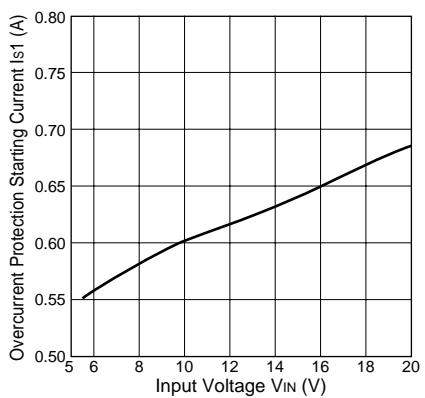


Line Regulation

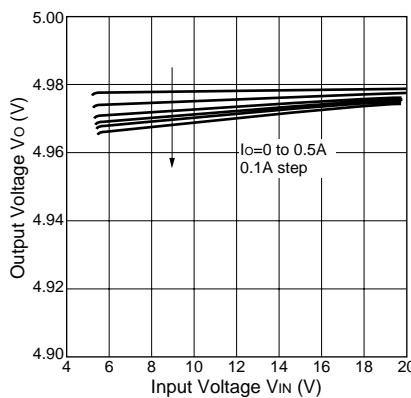


Load Regulation

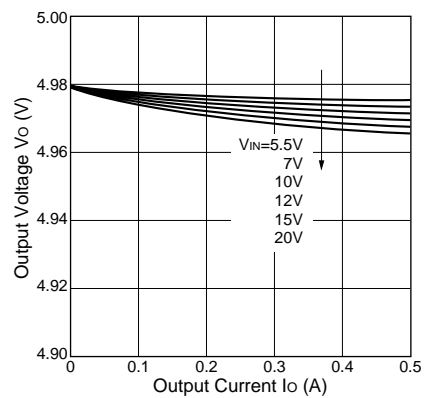


ON/OFF Control Characteristics

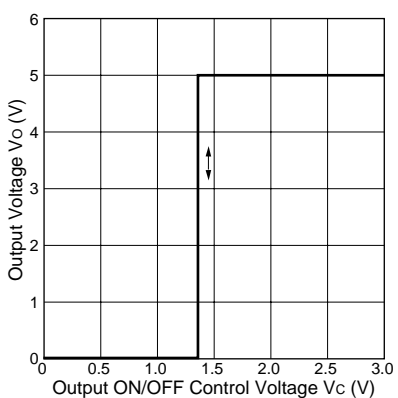

VC Terminal Characteristics

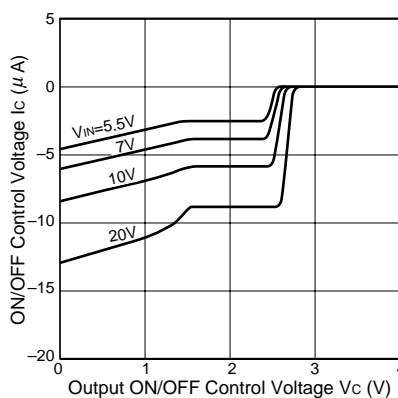

Thermal Protection Characteristics

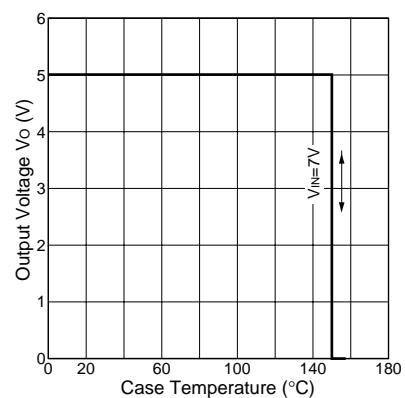


Typical Characteristics


($T_a=25^\circ\text{C}$)

SLA3007M


Io vs. VDIF Characteristics

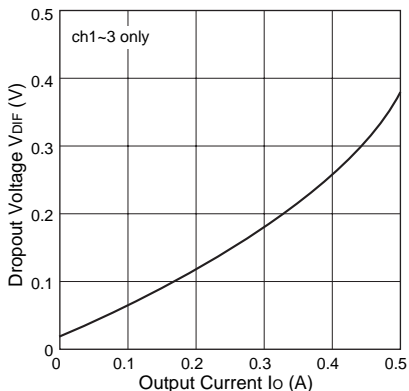


Rise Characteristics

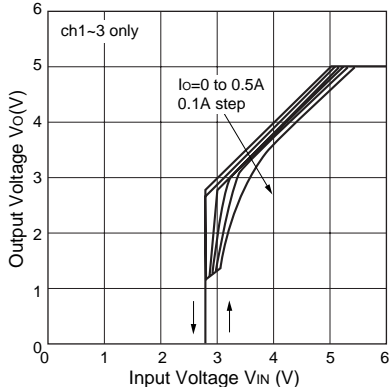


Rise Characteristics

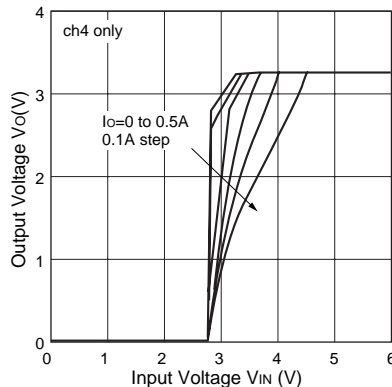


Quiescent Circuit Current

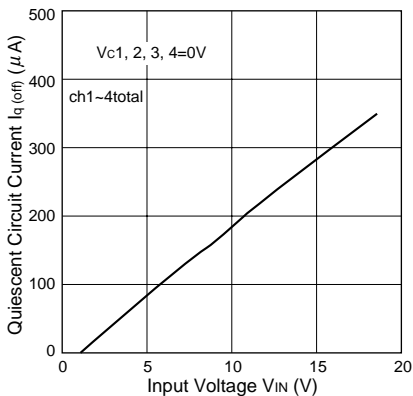


Circuit Current (ch1 operating)

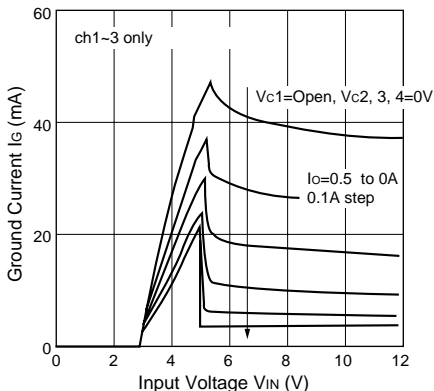


Circuit Current (ch4 operating)

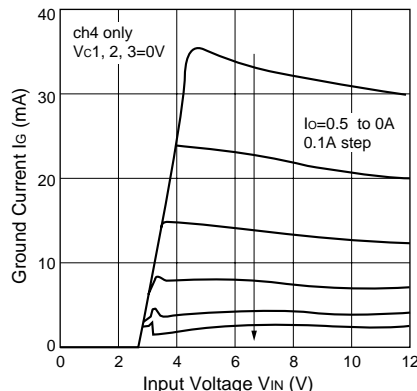


Overcurrent Protection Characteristics

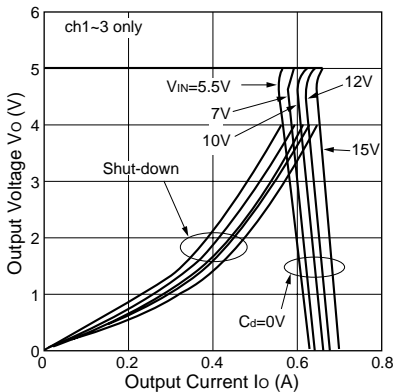


Overcurrent Protection Characteristics

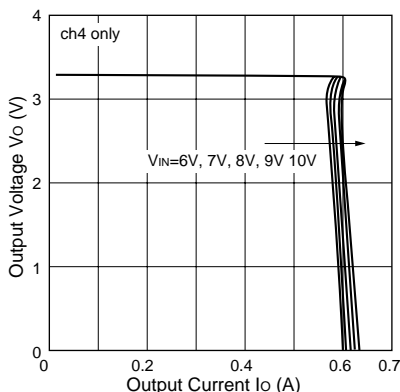


VIN vs. IS1 Characteristics

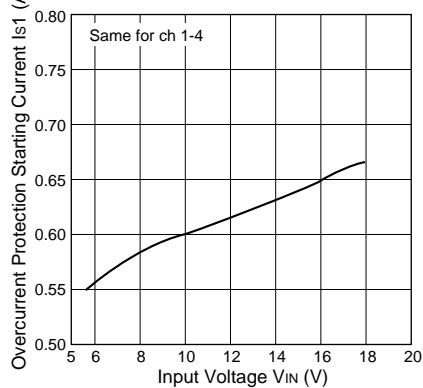


Line Regulation

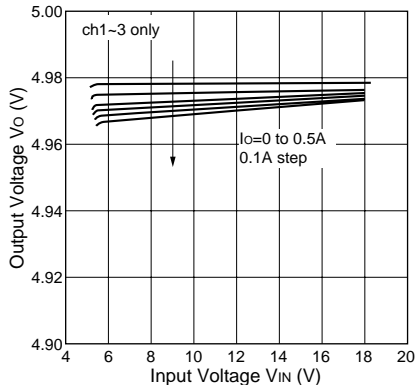

Load Regulation

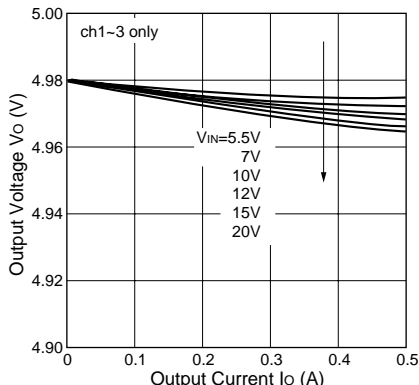


Line Regulation

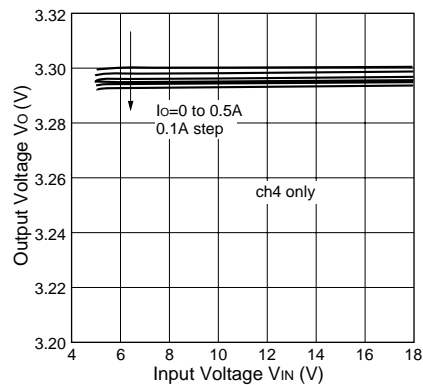

■Typical Characteristics


($T_a=25^\circ\text{C}$)

Load Regulation

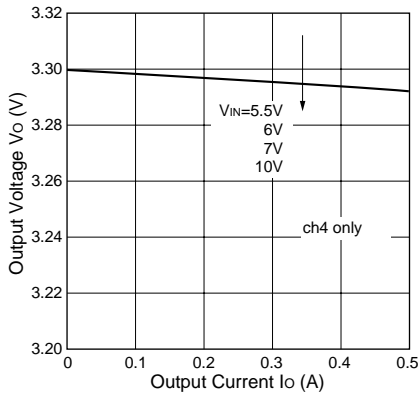


SLA3007M

ON/OFF Control Characteristics

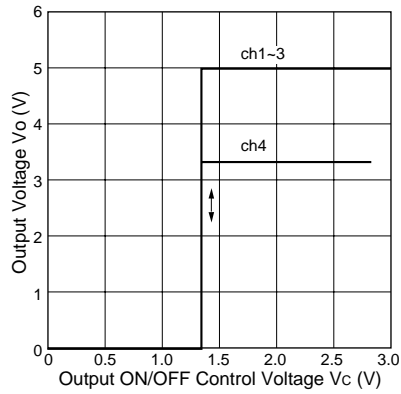

VC Terminal Characteristics

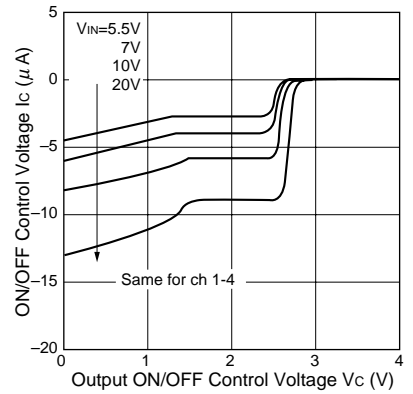

Thermal Protection Characteristics

