


10680 pixel × 3 line CCD Linear Sensor (Color)

Description

The ILX550K is a reduction type CCD linear sensor developed for color image scanner. This sensor reads A4-size documents at a density of 1200DPI.

Features


- Number of effective pixels: 32040 pixels
(10680 pixels × 3)
- Pixel size: 4μm × 4μm (4μm pitch)
- Distance between line: 32μm (8 lines)
- Single-sided readout
- Ultra low lag/High sensitivity
- Single 12V power supply
- Maximum data rate: 5MHz/Color
- Input Clock Pulse: CMOS 5V drive
- Number of output: 3 (R, G, B)
- Package: 24 pin Plastic DIP (400mil)

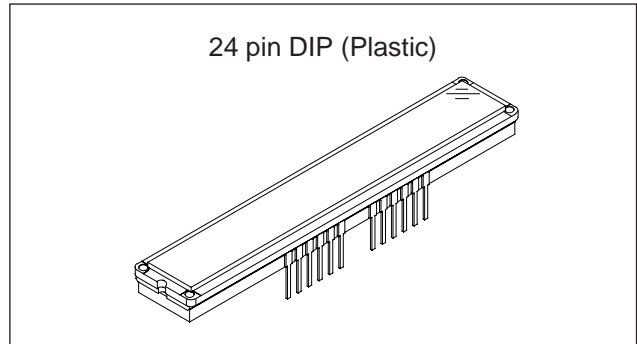


Absolute Maximum Ratings

- Supply voltage V_{DD} 15 V
- Operating temperature -10 to +55 °C

Pin Configuration (Top View)

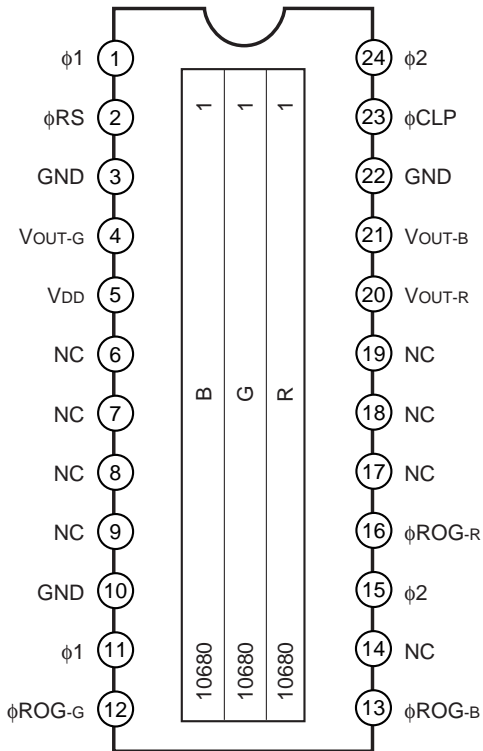

Block Diagram

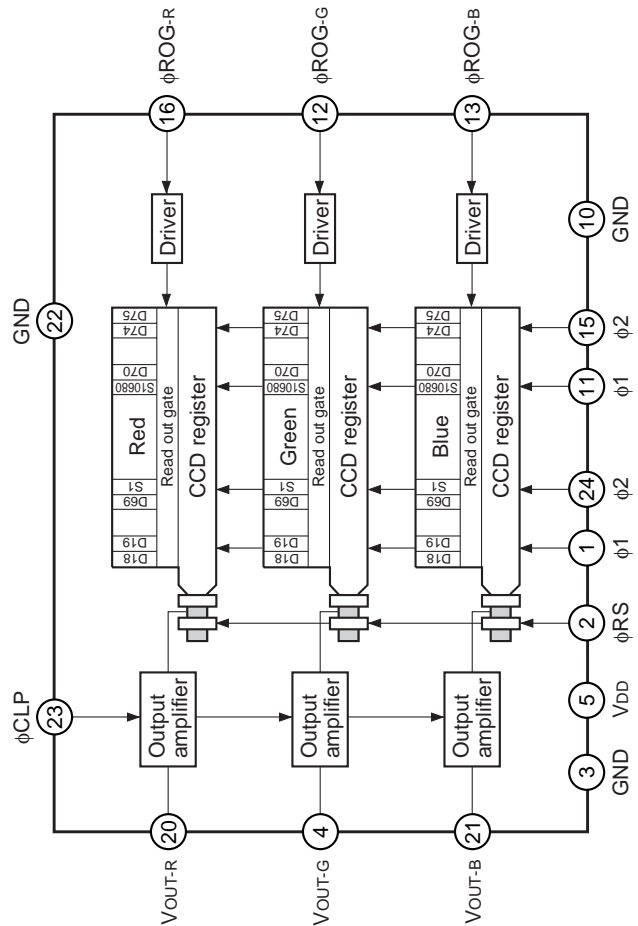

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

Pin Description

| Pin No. | Symbol | Description | Pin No. | Symbol | Description |
|---------|--------------------|-----------------------|---------|--------------------|----------------------|
| 1 | $\phi 1$ | Clock pulse input | 13 | $\phi\text{ROG-B}$ | Clock pulse input |
| 2 | ϕRS | Clock pulse input | 14 | NC | NC |
| 3 | GND | GND | 15 | $\phi 2$ | Clock pulse input |
| 4 | $V_{\text{OUT-G}}$ | Signal output (green) | 16 | $\phi\text{ROG-R}$ | Clock pulse input |
| 5 | V_{DD} | 12V power supply | 17 | NC | NC |
| 6 | NC | NC | 18 | NC | NC |
| 7 | NC | NC | 19 | NC | NC |
| 8 | NC | NC | 20 | $V_{\text{OUT-R}}$ | Signal output (red) |
| 9 | NC | NC | 21 | $V_{\text{OUT-B}}$ | Signal output (blue) |
| 10 | GND | GND | 22 | GND | GND |
| 11 | $\phi 1$ | Clock pulse input | 23 | ϕCLP | Clock pulse input |
| 12 | $\phi\text{ROG-G}$ | Clock pulse input | 24 | $\phi 2$ | Clock pulse input |

Recommended Supply Voltage

| Item | Min. | Typ. | Max. | Unit |
|-----------------|------|------|------|------|
| V_{DD} | 11.4 | 12 | 12.6 | V |

Clock Characteristics

| Item | Symbol | Min. | Typ. | Max. | Unit |
|---------------------------------------|-----------------------------|------|------|------|------|
| Input capacity of $\phi 1$, $\phi 2$ | $C_{\phi 1}$, $C_{\phi 2}$ | — | 500 | — | pF |
| Input capacity of ϕRS | $C_{\phi\text{RS}}$ | — | 10 | — | pF |
| Input capacity of ϕCLP | $C_{\phi\text{CLP}}$ | — | 10 | — | pF |
| Input capacity of ϕROG | $C_{\phi\text{ROG}}$ | — | 10 | — | pF |

Clock Frequency

| Item | Symbol | Min. | Typ. | Max. | Unit |
|---|--|------|------|------|------|
| Frequency of $\phi 1$, $\phi 2$, ϕRS , ϕCLP | $f_{\phi 1}$, $f_{\phi 2}$, $f_{\phi\text{RS}}$, $f_{\phi\text{CLP}}$ | — | 1 | 5 | MHz |

Input Clock Pulse Voltage Condition

| Item | | Min. | Typ. | Max. | Unit |
|--|------------|------|------|------|------|
| $\phi 1$, $\phi 2$, ϕRS , ϕCLP , ϕROG pulse voltage | High level | 4.75 | 5.0 | 5.25 | V |
| | Low level | — | 0 | 0.1 | V |

Electrooptical Characteristics (Note 1)

(Ta = 25°C, VDD = 12V, f_{PHS} = 1MHz, Input clock = 5Vp-p, Light source = 3200K, IR cut filter CM-500S (t = 1.0mm))

| Item | Symbol | Min. | Typ. | Max. | Unit | Remarks | |
|---------------------------|------------------|-----------------|------|------|------|------------|--------|
| Sensitivity | Red | R _R | 1.8 | 2.7 | 3.6 | V/(lx · s) | Note 2 |
| | Green | R _G | 2.1 | 3.3 | 4.5 | | |
| | Blue | R _B | 1.7 | 2.6 | 3.5 | | |
| Sensitivity nonuniformity | PRNU | — | 4 | 20 | % | Note 3 | |
| Saturation output voltage | V _{SAT} | 2 | 2.5 | — | V | Note 4 | |
| Saturation exposure | Red | SE _R | 0.56 | 0.93 | — | lx · s | Note 5 |
| | Green | SE _G | 0.44 | 0.76 | — | | |
| | Blue | SE _B | 0.57 | 0.96 | — | | |
| Dark voltage average | V _{DRK} | — | 2 | 5 | mV | Note 6 | |
| Dark signal nonuniformity | DSNU | — | 4 | 12 | mV | Note 6 | |
| Image lag | IL | — | 0.02 | — | % | Note 7 | |
| Supply current | I _{VDD} | — | 25 | 50 | mA | | |
| Total transfer efficiency | TTE | 92 | 98 | — | % | | |
| Output impedance | Z _o | — | 450 | — | Ω | | |
| Offset level | V _{OS} | — | 7.3 | — | V | Note 8 | |

Notes)

- In accordance with the given electrooptical characteristics, the black level is defined as the average value of D18, D19 to D67.
- For the sensitivity test light is applied with a uniform intensity of illumination.
- PRNU is defined as indicated below. Ray incidence conditions are the same as for Note 2.

$$V_{OUT-G} = 500\text{mV (Typ.)}$$

$$PRNU = \frac{(V_{MAX} - V_{MIN})/2}{V_{AVE}} \times 100 [\%]$$

Where the 5340 pixels are divided into blocks of 100, the maximum output of each block is set to V_{MAX}, the minimum output to V_{MIN} and the average output to V_{AVE}.


- Use below the minimum value of the saturation output voltage.
- Saturation exposure is defined as follows.

$$SE = \frac{V_{SAT}}{R}$$


Where R indicates R_R, R_G, R_B, and SE indicates SE_R, SE_G, SE_B.

- Optical signal accumulated time τ_{int} stands at 5.5ms.
- V_{OUT-G} = 500mV (Typ.)
- V_{OS} is defined as indicated below.

V_{OUT} indicates V_{OUT-R}, V_{OUT-G} and V_{OUT-B}.

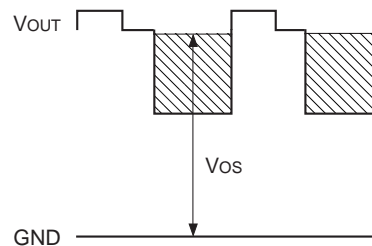


Clock Timing Chart 1

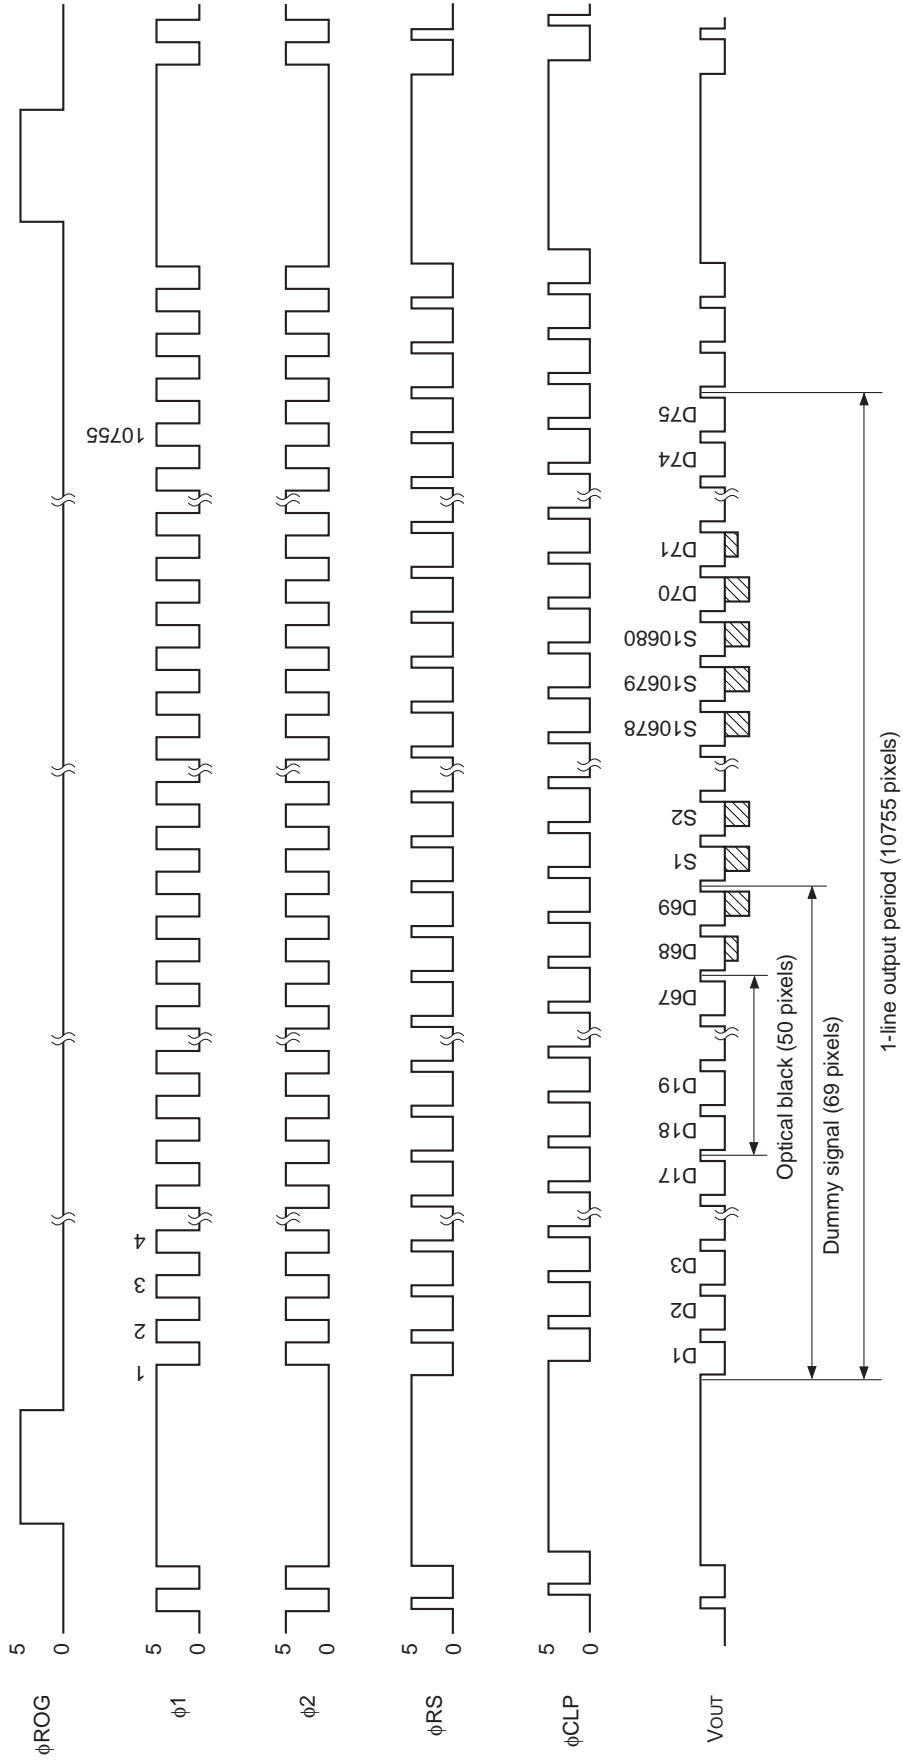


Note) The transfer pulses (ϕ 1, ϕ 2) must have more than 10755 cycles.
 Vout indicates Vout-R, Vout-G, Vout-B.
 ϕ ROG indicates ϕ ROG-R, ϕ ROG-G, ϕ ROG-B.

Clock Timing Chart 2

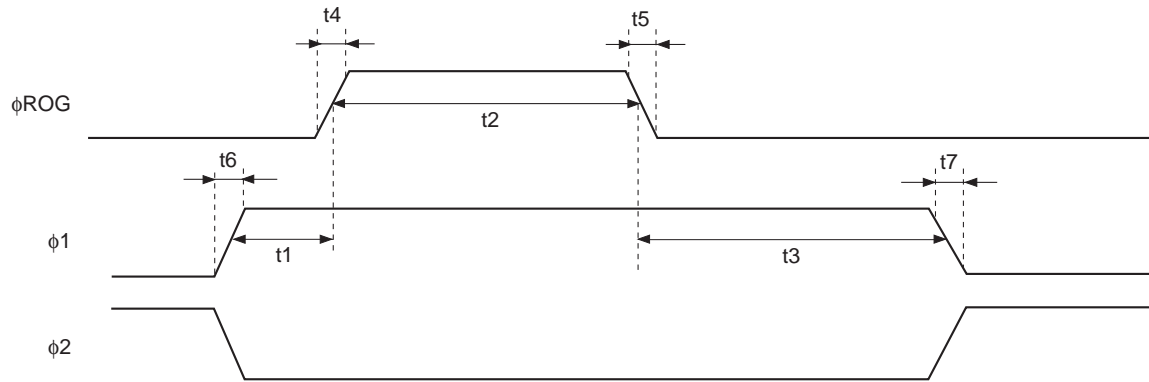

Clock Timing Chart 3

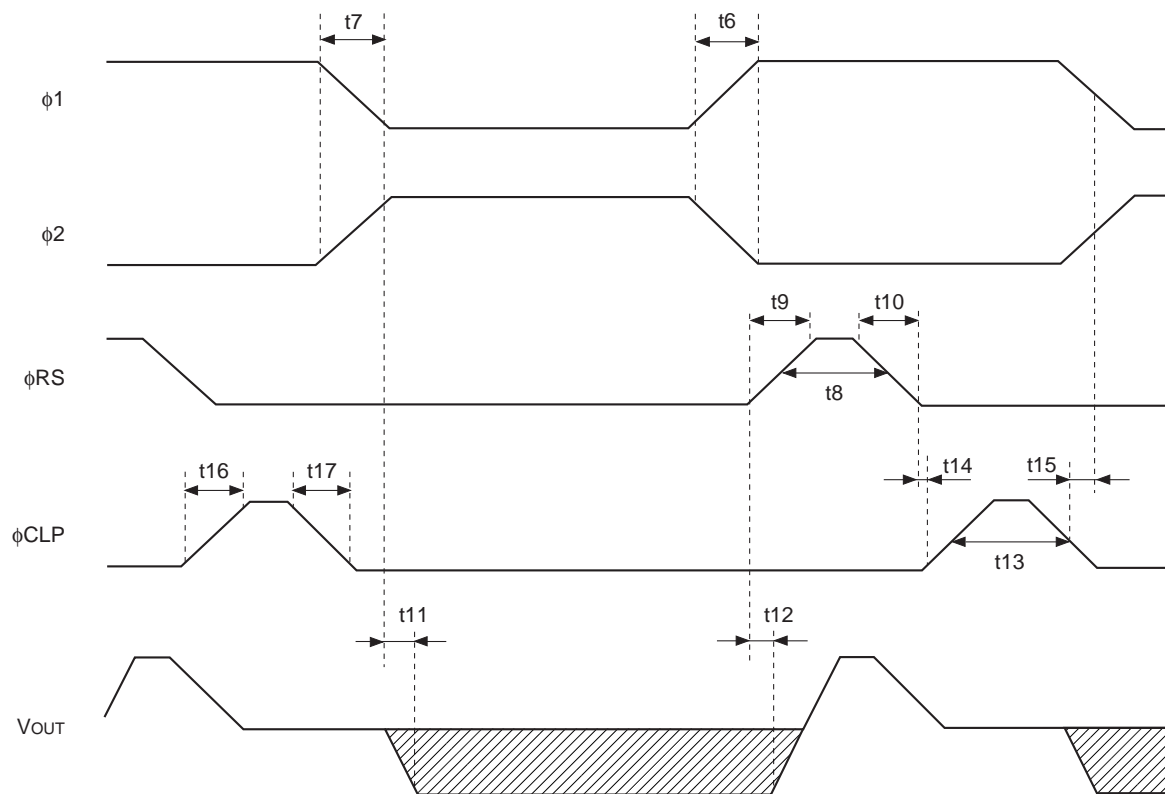


Clock Pulse Recommended Timing

| Item | Symbol | Min. | Typ. | Max. | Unit |
|--|--------|------|------------------|------|---------|
| ϕ ROG, ϕ 1 pulse timing | t1 | 50 | 100 | — | ns |
| ϕ ROG pulse high level period | t2 | 3 | 5 | — | μ s |
| ϕ ROG, ϕ 1 pulse timing | t3 | 1 | 2 | — | μ s |
| ϕ ROG pulse rise time | t4 | 0 | 5 | — | ns |
| ϕ ROG pulse fall time | t5 | 0 | 5 | — | ns |
| ϕ 1 pulse rise time/ ϕ 2 pulse fall time | t6 | 0 | 20 | — | ns |
| ϕ 1 pulse fall time/ ϕ 2 pulse rise time | t7 | 0 | 20 | — | ns |
| ϕ RS pulse high level period | t8 | 30 | 50* ¹ | — | ns |
| ϕ RS pulse rise time | t9 | 0 | 20 | — | ns |
| ϕ RS pulse fall time | t10 | 0 | 20 | — | ns |
| Signal output delay time | t11 | — | 50 | — | ns |
| | t12 | — | 20 | — | ns |
| ϕ CLP pulse high level period | t13 | 40 | 100 | — | ns |
| ϕ CLP pulse timing | t14 | 40 | 100 | — | ns |
| | t15 | 10 | 50 | — | ns |
| ϕ CLP pulse rise time | t16 | 0 | 20 | — | ns |
| ϕ CLP pulse fall time | t17 | 0 | 20 | — | ns |

*¹ These timing is the recommended condition under $f_{\phi RS} = 1\text{MHz}$.






Application Circuit*

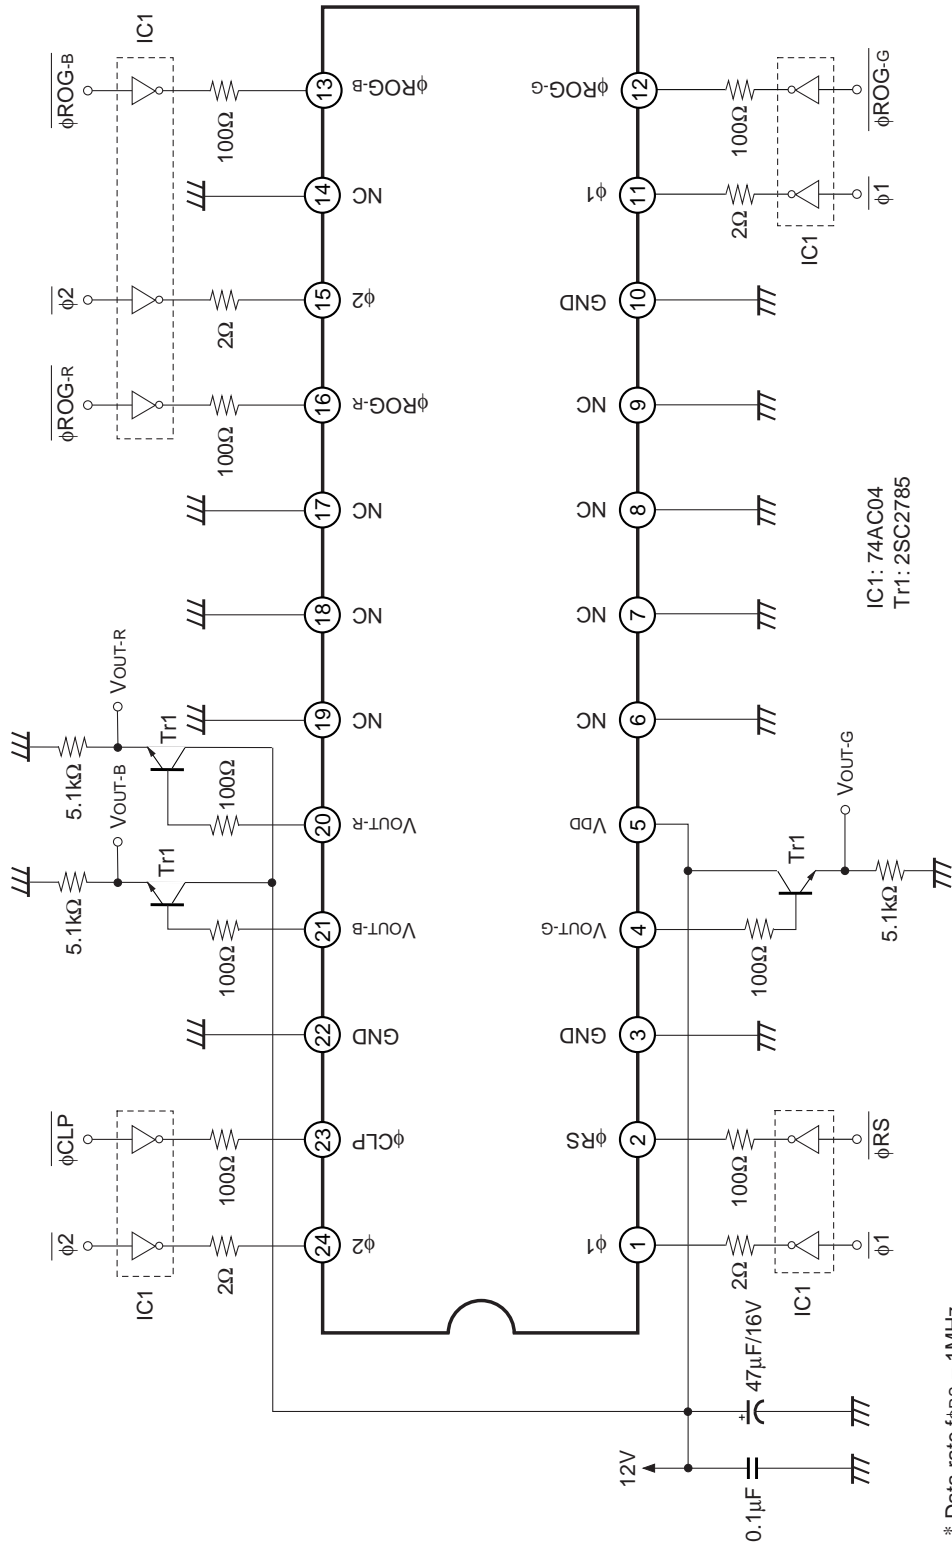

* Data rate $f_{\phi RS}$ = 1MHz

Application circuits shown are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits or for any infringement of third party patent and other right due to same.

Example of Representative Characteristics ($V_{DD} = 12V, T_a = 25^\circ C$)

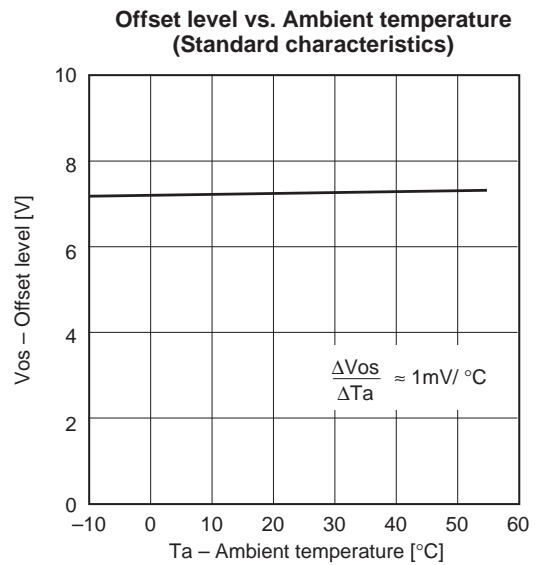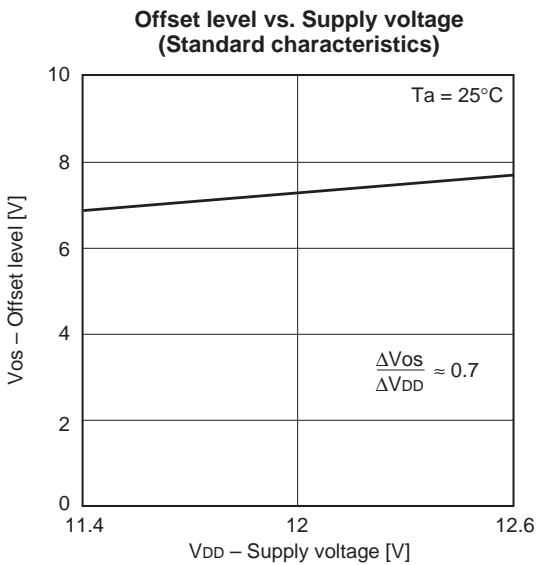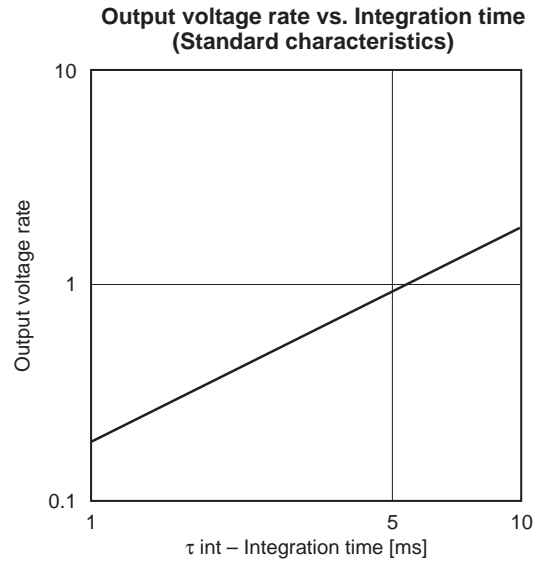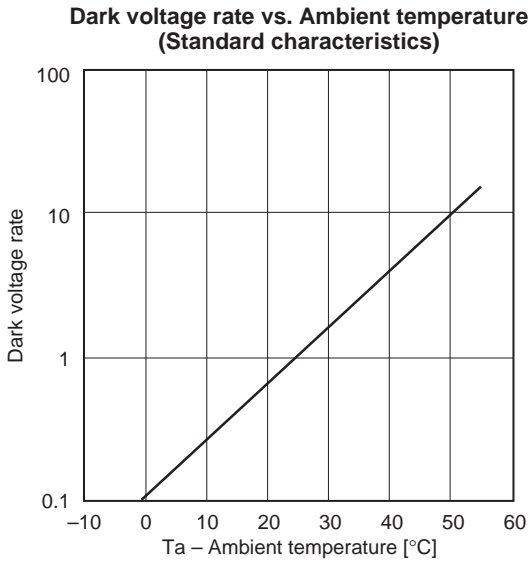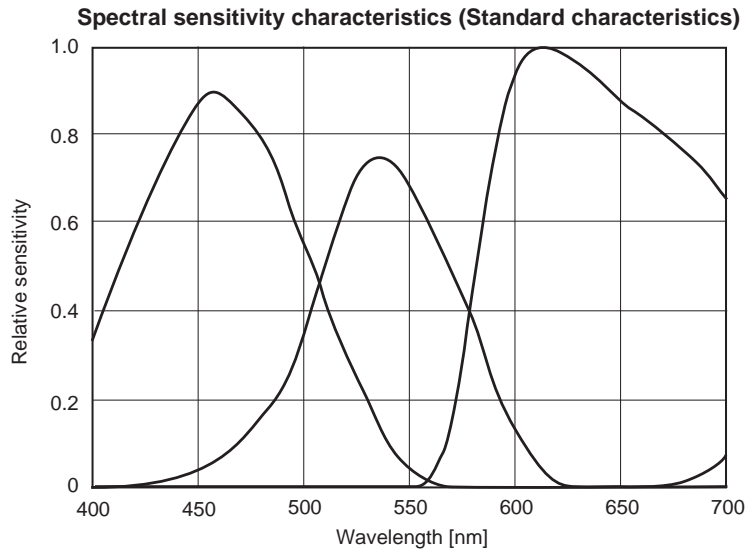

Notes of Handling

1) Static charge prevention


CCD image sensors are easily damaged by static discharge. Before handling be sure to take the following protective measures.

- Either handle bare handed or use non chargeable gloves, clothes or material.
Also use conductive shoes.
- When handling directly use an earth band.
- Install a conductive mat on the floor or working table to prevent the generation of static electricity.
- Ionized air is recommended for discharge when handling CCD image sensor.
- For the shipment of mounted substrates, use boxes treated for prevention of static charges.

2) Notes on Handling CCD Packages

The following points should be observed when handling and installing packages.

- Remain within the following limits when applying static load to the package:
 - Compressive strength: 39N/surface (Do not apply load more than 0.7mm inside the outer perimeter of the glass portion.)
 - Shearing strength: 29N/surface
 - Tensile strength: 29N/surface
 - Torsional strength: 0.9Nm

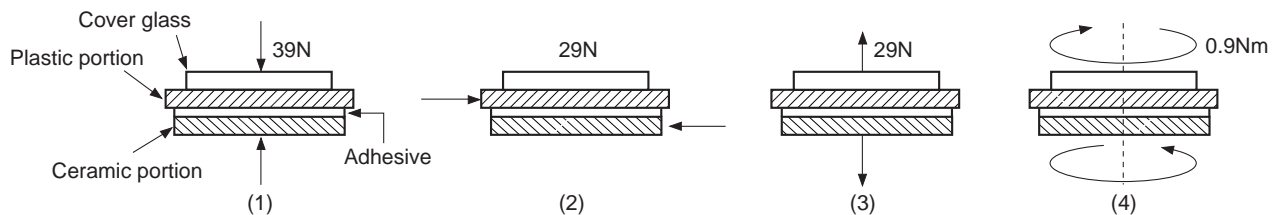

- In addition, if a load is applied to the entire surface by a hard component, bending stress may be generated and the package may fracture, etc., depending on the flatness of the ceramic portion. Therefore, for installation, either use an elastic load, such as a spring plate, or an adhesive.
- Be aware that any of the following can cause the package to crack or dust to be generated.
 - Applying repetitive bending stress to the external leads.
 - Applying heat to the external leads for an extended period of time with soldering iron.
 - Rapid cooling or heating.
 - Prying the plastic portion and ceramic portion away at a support point of the adhesive layer.
 - Applying the metal a crash or a rub against the plastic portion.

Note that the preceding notes should also be observed when removing a component from a board after it has already been soldered.

3) Soldering

- Make sure the package temperature does not exceed 80°C.
- Solder dipping in a mounting furnace causes damage to the glass and other defects. Use a grounded 30W soldering iron and solder each pin in less than 2 seconds. For repairs and remount, cool sufficiently.
- To dismount an imaging device, do not use a solder suction equipment. When using an electric desoldering tool, ground the controller. For the control system, use a zero cross type.


- 4) Dust and dirt protection
 - a) Operate in clean environments.
 - b) Do not either touch glass plates by hand or have any object come in contact with glass surfaces. Should dirt stick to a glass surface, blow it off with an air blower. (For dirt stuck through static electricity ionized air is recommended.)
 - c) Clean with a cotton bud and ethyl alcohol if the glass surface is grease stained. Be careful not to scratch the glass.
 - d) Keep in a case to protect from dust and dirt. To prevent dew condensation, preheat or precool when moving to a room with great temperature differences.

- 5) Exposure to high temperatures or humidity will affect the characteristics. Accordingly avoid storage or usage in such conditions.

- 6) CCD image sensors are precise optical equipment that should not be subject to mechanical shocks.

Package Outline Unit: mm

24pin SDIP(400mil)

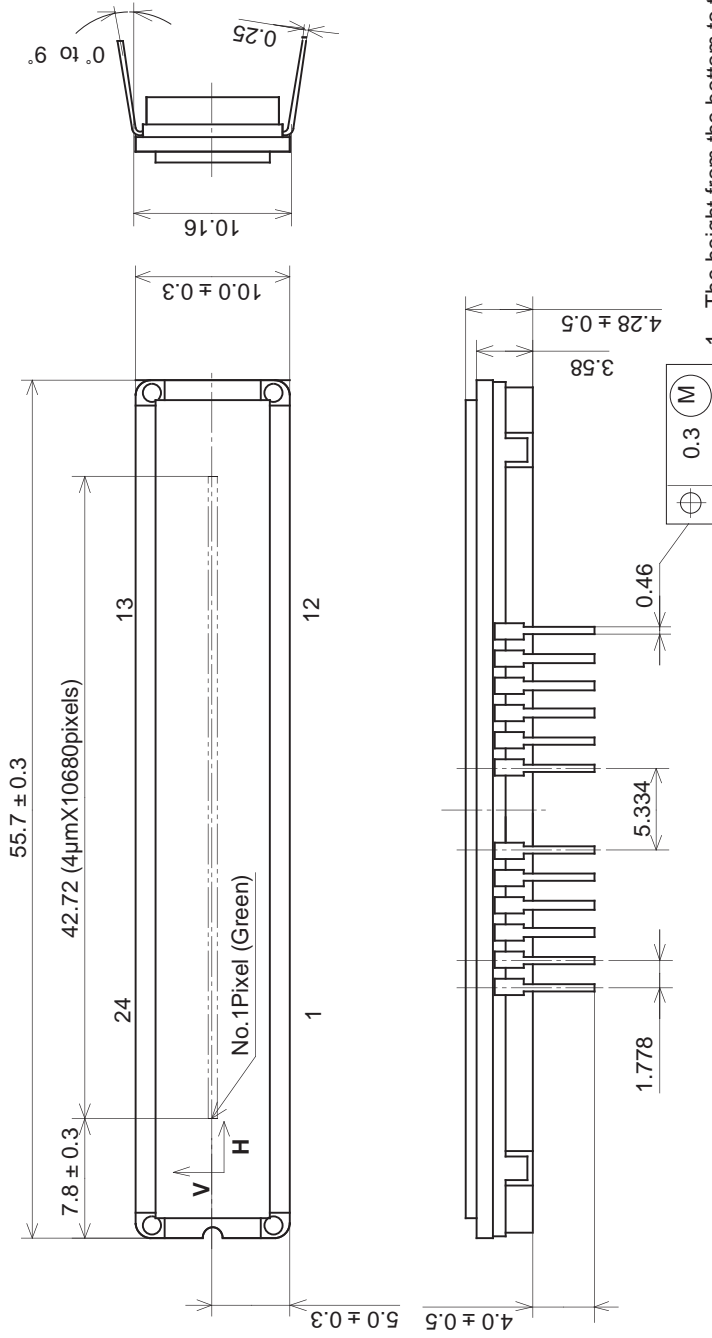

1. The height from the bottom to the sensor surface is 2.38 ± 0.3 mm.
2. The thickness of the cover glass is 0.7mm, and the refractive index is 1.5.

PACKAGE STRUCTURE

| | |
|------------------|------------------|
| PACKAGE MATERIAL | Plastic, Ceramic |
| LEAD TREATMENT | GOLD PLATING |
| LEAD MATERIAL | 42ALLOY |
| PACKAGE MASS | 5.43g |
| DRAWING NUMBER | LS-B25-01(E) |