



**IRF 820/FI-821/FI
IRF 822/FI-823/FI**


SGS-THOMSON

**N - CHANNEL ENHANCEMENT MODE
POWER MOS TRANSISTORS**

TYPE	V _{DSS}	R _{DS(on)}	I _D ■
IRF820	500 V	3.0 Ω	2.5 A
IRF820FI	500 V	3.0 Ω	2.0 A
IRF821	450 V	3.0 Ω	2.5 A
IRF821FI	450 V	3.0 Ω	2.0 A
IRF822	500 V	4.0 Ω	2.2 A
IRF822FI	500 V	4.0 Ω	1.5 A
IRF823	450 V	4.0 Ω	2.2 A
IRF823FI	450 V	4.0 Ω	1.5 A

- HIGH VOLTAGE - 450 V FOR OFF LINE SMP3
 - ULTRA FAST SWITCHING - FOR OPERATION AT > KHz
 - EASY DRIVE- FOR REDUCED COST AND SIZE
- INDUSTRIAL APPLICATIONS:**
- SWITCHING POWER SUPPLIES
 - MOTOR CONTROLS

N - channel enhancement mode POWER MOS field effect transistors. Easy drive and very fast switching times make these POWER MOS transistors ideal for high speed switching applications. Typical applications include switching power supplies, uninterruptible power supplies and motor speed control.

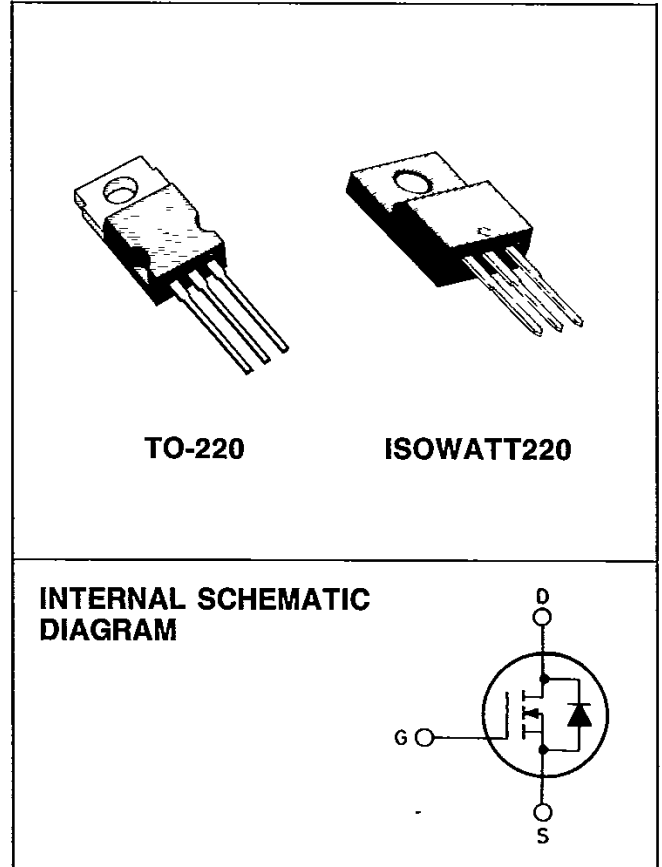

ABSOLUTE MAXIMUM RATINGS

		IRF				
		820 820FI	821 821FI	822 822FI	823 823FI	
V _{DS} *	Drain-source voltage (V _{GS} = 0)	500	450	500	450	V
V _{DGR} *	Drain-gate voltage (R _{GS} = 20 KΩ)	500	450	500	450	V
V _{GS}	Gate-source voltage	±20				V
I _{DM} (●)	Drain current (pulsed)	8	8	7	7	A
I _{DLM}	Drain inductive current, clamped (L = 100 μH)	8	8	7	7	A
I _D	Drain current (cont.) at T _c = 25°C	2.5	2.5	2.2	2.2	A
I _D	Drain current (cont.) at T _c = 100°C	1.6	1.6	1.4	1.4	A
I _D ■	Drain current (cont.) at T _c = 25°C	2	2	1.5	1.5	A
I _D ■	Drain current (cont.) at T _c = 100°C	1.2	1.2	0.9	0.9	A
P _{tot} ■	Total dissipation at T _c < 25°C	TO-220		ISOWATT220		W
	Derating factor	50		30		
		0.40		0.24		W/°C
T _{stg}	Storage temperature	-55 to 150				°C
T _j	Max. operating junction temperature	150				°C

* T_i = 25°C to 125°C
 (●) Repetitive Rating: Pulse width limited by max junction temperature.
 ■ See note on ISOWATT220 on this datasheet.

THERMAL DATA

TO-220 | ISOWATT220

$R_{thj-case}$	Thermal resistance junction-case	max	2.5	4.16	°C/W
R_{thc-s}	Thermal resistance case-sink	typ	0.5		°C/W
$R_{thj-amb}$	Thermal resistance junction-ambient	max	80		°C/W
T_l	Maximum lead temperature for soldering purpose		300		°C

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise specified)

Parameters	Test Conditions	Min.	Typ.	Max.	Unit
------------	-----------------	------	------	------	------

OFF

$V_{(BR)DSS}$	Drain-source breakdown voltage	$I_D = 250 \mu\text{A}$ for IRF820/822/820FI/822FI for IRF821/823/821FI/823FI	$V_{GS} = 0$	500 450		V V
I_{DSS}	Zero gate voltage drain current ($V_{GS} = 0$)	$V_{DS} = \text{Max Rating}$ $V_{DS} = \text{Max Rating} \times 0.8$	$T_c = 125^\circ\text{C}$		250 1000	μA μA
I_{GSS}	Gate-body leakage current ($V_{DS} = 0$)	$V_{GS} = \pm 20 \text{ V}$			± 500	nA

ON **

$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$	$I_D = 250 \mu\text{A}$	2		4	V
$I_{D(on)}$	On-state drain current	$V_{DS} > I_{D(on)} \times R_{DS(on)max}$ for IRF820/821/820FI/821FI for IRF822/823/821FI/823FI	$V_{GS} = 10 \text{ V}$	2.5 2.2			A A
$R_{DS(on)}$	Static drain-source on resistance	$V_{GS} = 10 \text{ V}$ for IRF820/821/820FI/821FI for IRF822/823/822FI/823FI	$I_D = 1.4 \text{ A}$			3.0 4.0	Ω Ω

DYNAMIC

g_{fs}^{**}	Forward transconductance	$V_{DS} > I_{D(on)} \times R_{DS(on)max}$ $I_D = 1.4 \text{ A}$		1.0			mho
C_{iss} C_{oss} C_{rss}	Input capacitance Output capacitance Reverse transfer capacitance	$V_{DS} = 25 \text{ V}$ $V_{GS} = 0$	$f = 1 \text{ MHz}$			400 150 40	pF pF pF

SWITCHING

$t_{d(on)}$ t_r $t_{d(off)}$ t_f	Turn-on time Rise time Turn-off delay time Fall time	$V_{DD} = 225 \text{ V}$ $R_l = 50 \Omega$ (see test circuit)	$I_D = 1.0 \text{ A}$			60 50 60 30	ns ns ns ns
Q_g	Total Gate Charge	$V_{GS} = 10 \text{ V}$ $V_{DS} = \text{Max Rating} \times 0.8$ (see test circuit)	$I_D = 2.5 \text{ A}$			19	nC

ELECTRICAL CHARACTERISTICS (Continued)

Parameters	Test Conditions	Min.	Typ.	Max.	Unit
------------	-----------------	------	------	------	------

SOURCE DRAIN DIODE


I_{SD}	Source-drain current			2.5	A
$I_{SDM} (*)$	Source-drain current (pulsed)			10	A
$V_{SD} **$	Forward on voltage	$I_{SD} = 2.5 \text{ A}$	$V_{GS} = 0$	1.6	V
t_{rr}	Reverse recovery time	$T_J = 150^\circ\text{C}$		600	ns
Q_{rr}	Reverse recovered charge	$I_{SD} = 2.5 \text{ A}$	$di/dt = 100 \text{ A}/\mu\text{s}$	3.5	μC

** Pulsed: Pulse duration $\leq 300 \mu\text{s}$, duty cycle $\leq 1.5\%$


(*) Repetitive Rating: Pulse width limited by max junction temperature

■ See note on ISOWATT220 in this datasheet


Safe operating areas (standard package)

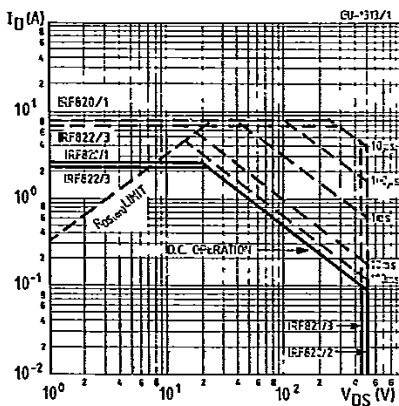


Thermal impedance (standard package)

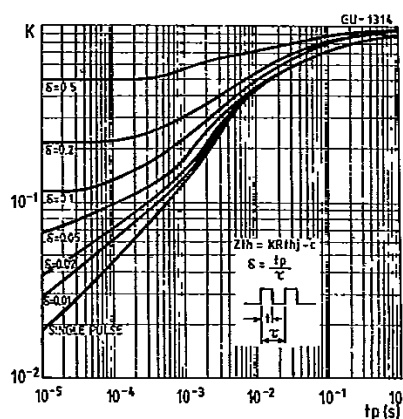


Derating curve (standard package)

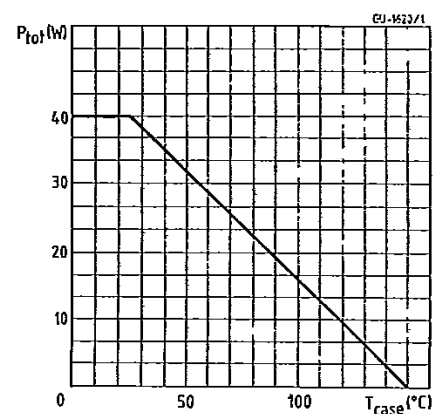


Output characteristics

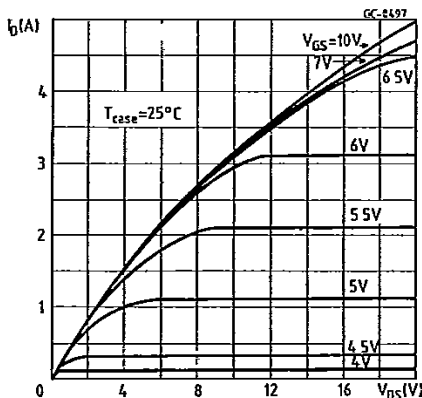

Output characteristics

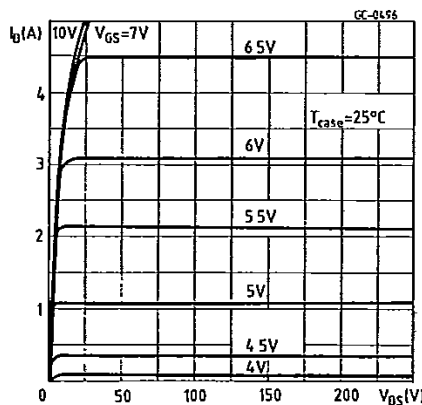


Transfer characteristics

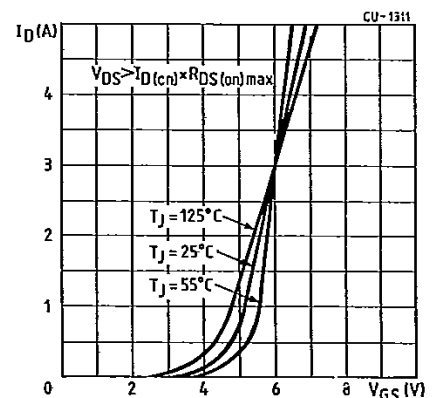


30E D 7929237 0029810 0

T-39-11


Transconductance

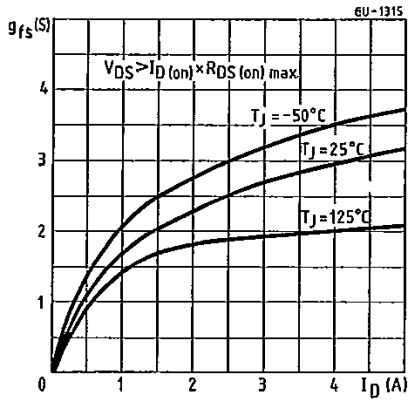


Static drain-source on resistance

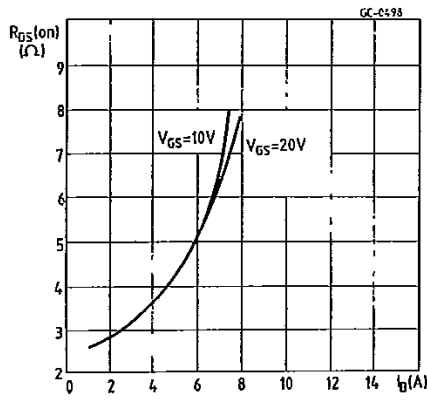


Maximum drain current vs temperature

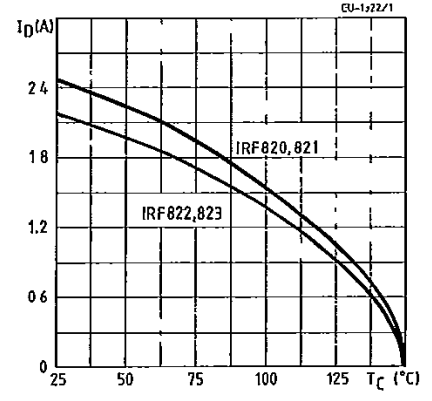


Gate charge vs gate-source voltage

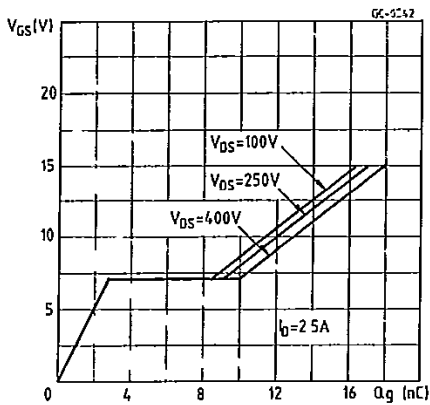


Capacitance variation

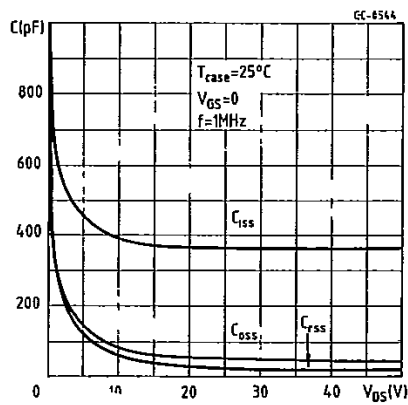


Normalized breakdown voltage vs temperature

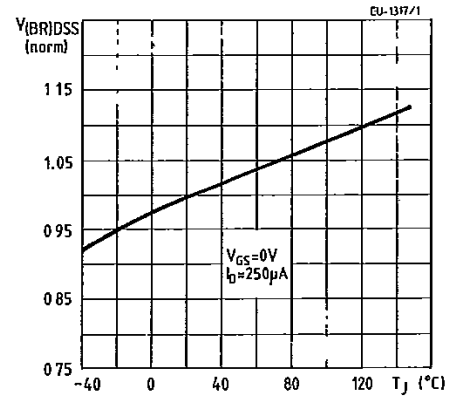


Normalized on resistance vs temperature

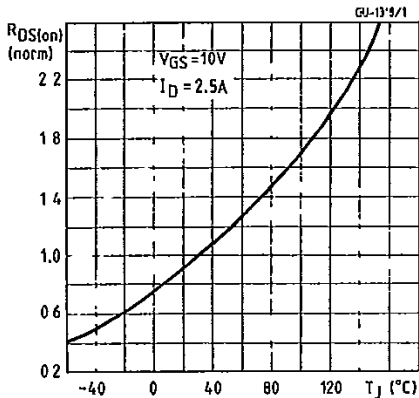

Source-drain diode forward characteristics

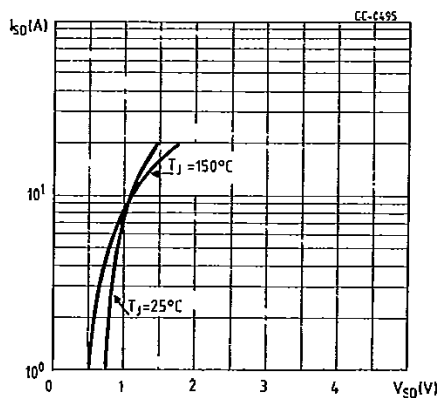


Clamped inductive test circuit

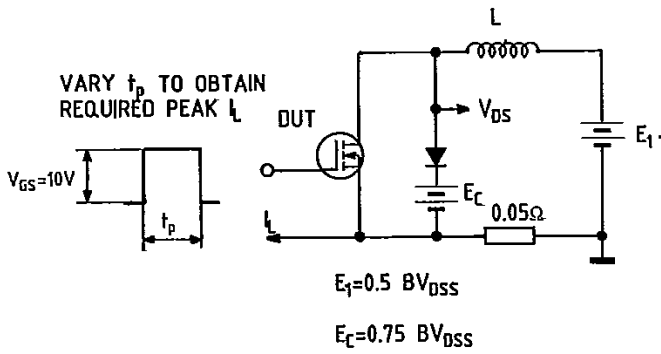


SC-0242

Clamped inductive waveforms

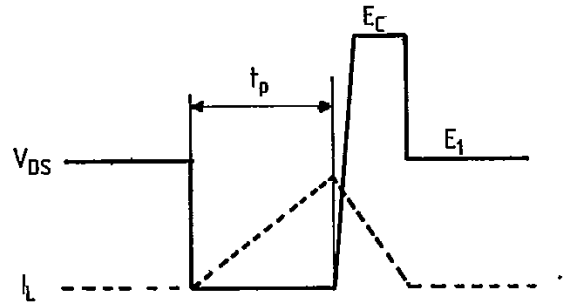


SC-0243

Switching times test circuit

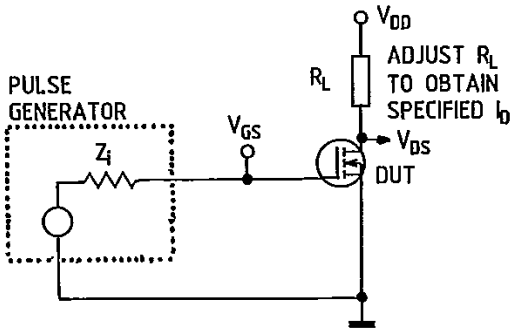

SC-0246

Gate charge test circuit

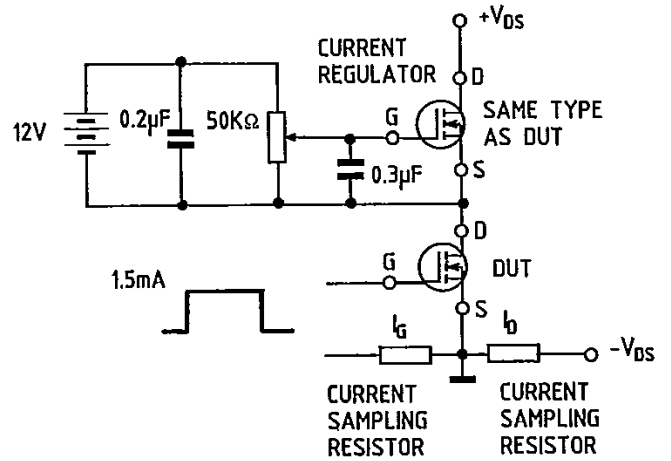

SC-0244

ISOWATT220 PACKAGE CHARACTERISTICS AND APPLICATION.

ISOWATT220 is fully isolated to 2000V dc. Its thermal impedance, given in the data sheet, is optimized to give efficient thermal conduction together with excellent electrical isolation.

The structure of the case ensures optimum distances between the pins and heatsink. The ISOWATT220 package eliminates the need for external isolation so reducing fixing hardware. Accurate moulding techniques used in manufacture assure consistent heat spreader-to-heatsink capacitance.

ISOWATT220 thermal performance is better than that of the standard part, mounted with a 0.1mm mica washer. The thermally conductive plastic has a higher breakdown rating and is less fragile than mica or plastic sheets. Power derating for ISOWATT220 packages is determined by:

$$P_D = \frac{T_j - T_c}{R_{th}}$$

from this I_{Dmax} for the POWER MOS can be calculated:

$$I_{Dmax} \leq \sqrt{\frac{P_D}{R_{DS(on)} \text{ (at } 150^\circ\text{C)}}$$

THERMAL IMPEDANCE OF ISOWATT220 PACKAGE

Fig. 1 illustrates the elements contributing to the thermal resistance of transistor heatsink assembly, using ISOWATT220 package.

The total thermal resistance $R_{th (tot)}$ is the sum of each of these elements.

The transient thermal impedance, Z_{th} for different pulse durations can be estimated as follows:

1 - for a short duration power pulse less than 1ms;

$$Z_{th} < R_{thJ-C}$$

2 - for an intermediate power pulse of 5ms to 50ms:


$$Z_{th} = R_{thJ-C}$$

3 - for long power pulses of the order of 500ms or greater:

$$Z_{th} = R_{thJ-C} + R_{thC-HS} + R_{thHS-amb}$$


It is often possible to discern these areas on transient thermal impedance curves.

Fig. 1




ISOWATT DATA

Safe operating areas

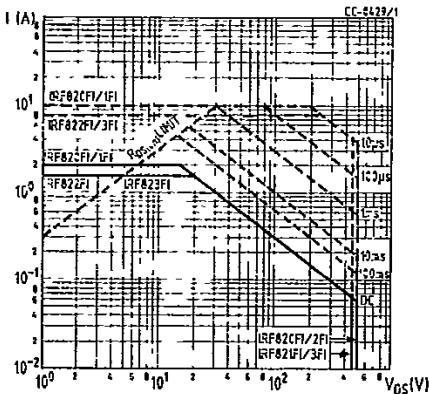

Thermal impedance

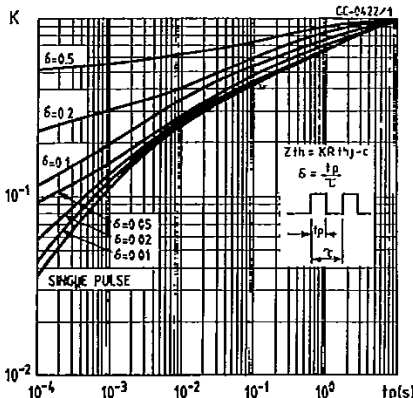

Derating curve

