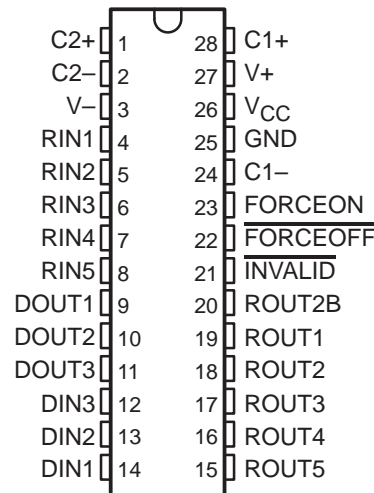


- **Single-Chip and Single-Supply Interface for IBM™ PC/AT™ Serial Port**
- **Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards**
- **Operates With 3-V to 5.5-V V_{CC} Supply**
- **Always-Active Noninverting Receiver Output (ROUT2B)**
- **Operates up to 250 kbit/s**
- **Low Standby Current . . . 1 μ A Typical**
- **External Capacitors . . . 4 \times 0.1 μ F**
- **Accepts 5-V Logic Input With 3.3-V Supply**
- **Designed to Be Interchangeable With Maxim MAX3243**
- **Serial-Mouse Driveability**
- **RS-232 Bus-Pin ESD Protection Exceeds \pm 15-kV Using Human-Body Model (HBM)**
- **Applications**
 - **Battery-Powered Systems, PDAs, Notebooks, Laptops, Palmtop PCs, and Hand-Held Equipment**
- **Package Options Include Plastic Small-Outline (DW), Shrink Small-Outline (DB), and Thin Shrink Small-Outline (PW) Packages**

DB, DW, OR PW PACKAGE
(TOP VIEW)

description

The MAX3243 device consists of three line drivers, five line receivers, and a dual charge-pump circuit with \pm 15-kV ESD protection pin-to-pin (serial-port connection pins, including GND). The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. This combination of drivers and receivers matches that needed for the typical serial port used in an IBM PC/AT, or compatible. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. In addition, the device includes an always-active noninverting output (ROUT2B), which allows applications using the ring indicator to transmit data while the device is powered down. The device operates at data signaling rates up to 250 kbit/s and a maximum of 30-V/ μ s driver output slew rate.

Flexible control options for power management are available when the serial port is inactive. The auto-powerdown feature functions when FORCEON is low and FORCEOFF is high. During this mode of operation, if the device does not sense a valid RS-232 signal, the driver outputs are disabled. If FORCEOFF is set low, both drivers and receivers (except ROUT2B) are shut off, and the supply current is reduced to 1 μ A. Disconnecting the serial port or turning off the peripheral drivers causes the auto-powerdown condition to occur.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

AT, IBM, and PC are trademarks of International Business Machines Corporation.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

MAX3243

3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER

SLLS350B – APRIL 1999 – REVISED JANUARY 2000

description (continued)

Auto-powerdown can be disabled when FORCEON and FORCEOFF are high, and should be done when driving a serial mouse. With auto-powerdown enabled, the device is activated automatically when a valid signal is applied to any receiver input. The INVALID output is used to notify the user if an RS-232 signal is present at any receiver input. INVALID is high (valid data) if any receiver input voltage is greater than 2.7 V or less than -2.7 V or has been between -0.3 V and 0.3 V for less than 30 μs. INVALID is low (invalid data) if all receiver input voltages are between -0.3 V and 0.3 V for more than 30 μs. Refer to Figure 5 for receiver input levels.

The MAX3243C is characterized for operation from 0°C to 70°C. The MAX3243I is characterized for operation from -40°C to 85°C.

AVAILABLE OPTIONS

| TA | PACKAGED DEVICES | | |
|---------------|---------------------------|--------------------|--------------------------------|
| | SHRINK SMALL OUTLINE (DB) | SMALL OUTLINE (DW) | THIN SHRINK SMALL OUTLINE (PW) |
| 0°C to 70°C | MAX3243CDB | MAX3243CDW | MAX3243CPW |
| -40°C to 85°C | MAX3243IDB | MAX3243IDW | MAX3243IPW |

The DB, DW, and PW packages are available taped and reeled. Add the suffix R to device type (e.g., MAX3243CDBR).

Function Tables

EACH DRIVER

| INPUTS | | | | OUTPUT DOUT | DRIVER STATUS |
|--------|---------|----------|------------------------|-------------|---|
| DIN | FORCEON | FORCEOFF | VALID RIN RS-232 LEVEL | | |
| X | X | L | X | Z | Powered off |
| L | H | H | X | H | Normal operation with auto-powerdown disabled |
| H | H | H | X | L | |
| L | L | H | Yes | H | Normal operation with auto-powerdown enabled |
| H | L | H | Yes | L | |
| L | L | H | No | Z | Powered off by auto-powerdown feature |
| H | L | H | No | Z | |

H = high level, L = low level, X = irrelevant, Z = high impedance

EACH RECEIVER

| INPUTS | | | | OUTPUTS | | RECEIVER STATUS |
|--------|-----------------|----------|------------------------|---------|------|---|
| RIN2 | RIN1, RIN3-RIN5 | FORCEOFF | VALID RIN RS-232 LEVEL | ROUT2B | ROUT | |
| L | X | L | X | L | Z | Powered off while ROUT2B is active |
| H | X | L | X | H | Z | |
| L | L | H | Yes | L | H | Normal operation with auto-powerdown disabled/enabled |
| L | H | H | Yes | L | L | |
| H | L | H | Yes | H | H | |
| H | H | H | Yes | H | L | |
| Open | Open | H | No | L | H | |

H = high level, L = low level, X = irrelevant, Z = high impedance (off), Open = input disconnected or connected driver off

MAX3243

3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER

SLLS350B – APRIL 1999 – REVISED JANUARY 2000

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|---|----------------------------|
| Supply voltage range, V_{CC} (see Note 1) | –0.3 V to 6 V |
| Positive output supply voltage range, V_+ (see Note 1) | –0.3 V to 7 V |
| Negative output supply voltage range, V_- (see Note 1) | 0.3 V to –7 V |
| Supply voltage difference, $V_+ - V_-$ (see Note 1) | 13 V |
| Input voltage range, V_I : Driver ($\overline{\text{FORCEOFF}}$, FORCEON) | –0.3 V to 6 V |
| Receiver | –25 V to 25 V |
| Output voltage range, V_O : Driver | –13.2 V to 13.2 V |
| Receiver (INVALID) | –0.3 V to $V_{CC} + 0.3$ V |
| Package thermal impedance, θ_{JA} (see Note 2): DB package | 62°C/W |
| DW package | 46°C/W |
| PW package | 62°C/W |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |
| Storage temperature range, T_{stg} | –65°C to 150°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltages are with respect to network GND.
2. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions (see Note 3 and Figure 6)

| | | | MIN | NOM | MAX | UNIT |
|--|--|------------------|-----|-----|-----|------|
| Supply voltage | | $V_{CC} = 3.3$ V | 3 | 3.3 | 3.6 | V |
| | | $V_{CC} = 5$ V | 4.5 | 5 | 5.5 | |
| V_{IH} Driver and control high-level input voltage | DIN, $\overline{\text{FORCEOFF}}$, FORCEON | $V_{CC} = 3.3$ V | 2 | | V | |
| | | $V_{CC} = 5$ V | 2.4 | | | |
| V_{IL} Driver and control low-level input voltage | DIN, $\overline{\text{FORCEOFF}}$, FORCEON | | | 0.8 | V | |
| V_I Driver and control input voltage | DIN, $\overline{\text{FORCEOFF}}$, FORCEON | 0 | 5.5 | | V | |
| V_I Receiver input voltage | | –25 | 25 | | V | |
| T_A Operating free-air temperature | MAX3243C | 0 | 70 | | °C | |
| | MAX3243I | –40 | 85 | | | |

NOTE 3: Test conditions are C1–C4 = 0.1 μ F at $V_{CC} = 3.3$ V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at $V_{CC} = 5$ V \pm 0.5 V.

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Note 3 and Figure 6)

| PARAMETER | | TEST CONDITIONS | MIN | TYP‡ | MAX | UNIT |
|-----------------------------|---|---|-----|------------|---------|---------|
| I_l Input leakage current | $\overline{\text{FORCEOFF}}$, FORCEON | | | ± 0.01 | ± 1 | μ A |
| I_{CC} Supply current | Auto-powerdown disabled | No load, $\overline{\text{FORCEOFF}}$ and FORCEON at V_{CC} | | 0.3 | 1 | mA |
| | Powered off | No load, $\overline{\text{FORCEOFF}}$ at GND | | 1 | 10 | |
| | Auto-powerdown enabled | No load, $\overline{\text{FORCEOFF}}$ at V_{CC} , FORCEON at GND, All RIN are open or grounded | | 1 | 10 | μ A |

‡ All typical values are at $V_{CC} = 3.3$ V or $V_{CC} = 5$ V, and $T_A = 25^\circ\text{C}$.

NOTE 3. Test conditions are C1–C4 = 0.1 μ F at $V_{CC} = 3.3$ V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at $V_{CC} = 5$ V \pm 0.5 V.

PRODUCT PREVIEW



DRIVER SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Note 3 and Figure 6)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|--|-----|-------|-----|------|
| V _{OH} High-level output voltage | All DOUT at R _L = 3 kΩ to GND | 5 | 5.4 | | V |
| V _{OL} Low-level output voltage | All DOUT at R _L = 3 kΩ to GND | -5 | -5.4 | | V |
| V _O Output voltage (mouse driveability) | DIN1 = DIN2 = GND, DIN3 = V _{CC} , 3-kΩ to GND at DOUT3, DOUT1 = DOUT2 = 2.5 mA | | ±5 | | V |
| I _{IH} High-level input current | V _I = V _{CC} | | ±0.01 | ±1 | μA |
| I _{IL} Low-level input current | V _I at GND | | ±0.01 | ±1 | μA |
| I _{OS} Short-circuit output current‡ | V _{CC} = 3.6 V, V _O = 0 V V _{CC} = 5.5 V, V _O = 0 V | | ±35 | ±60 | mA |
| r _o Output resistance | V _{CC} , V ₊ , and V ₋ = 0 V, V _O = ±2 V | 300 | 10M | | Ω |
| I _{off} Output leakage current | FORCEOFF = GND, V _O = ±12 V, V _{CC} = 0 to 5.5 V | | | ±25 | μA |

† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

‡ Short-circuit durations should be controlled to prevent exceeding the device absolute power dissipation ratings, and not more than one output should be shorted at a time.

NOTE 3. Test conditions are C1–C4 = 0.1 μF at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V_{CC} = 5 V ± 0.5 V.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Note 3 and Figure 6)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|--|-----|------|-----|--------|
| Maximum data rate | C _L = 1000 pF, One DOUT switching, R _L = 3 kΩ, See Figure 1 | | 250 | | kbit/s |
| t _{sk(p)} Pulse skew§ | C _L = 150 pF to 2500 pF R _L = 3 kΩ to 7 kΩ, See Figure 2 | | 100 | | ns |
| SR(tr) Slew rate, transition region (see Figure 1) | V _{CC} = 3.3 V, R _L = 3 kΩ to 7 kΩ | | | | V/μs |
| | C _L = 150 pF to 1000 pF | 6 | | 30 | |
| | C _L = 150 pF to 2500 pF | 4 | | 30 | |

† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

§ Pulse skew is defined as |t_{pLH} - t_{pHL}| of each channel of the same device.

NOTE 3. Test conditions are C1–C4 = 0.1 μF at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V_{CC} = 5 V ± 0.5 V.

MAX3243

3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER

SLLS350B – APRIL 1999 – REVISED JANUARY 2000

RECEIVER SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Note 3 and Figure 6)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|--------------------------------|-------------------------|-------------------------|-----|------|
| V _{OH} High-level output voltage | I _{OH} = -1 mA | V _{CC} - 0.6 V | V _{CC} - 0.1 V | | V |
| V _{OL} Low-level output voltage | I _{OL} = 1.6 mA | | | 0.4 | V |
| V _{IT+} Positive-going input threshold voltage | V _{CC} = 3.3 V | | 1.6 | 2.4 | V |
| | V _{CC} = 5 V | | 1.9 | 2.4 | |
| V _{IT-} Negative-going input threshold voltage | V _{CC} = 3.3 V | 0.6 | 1.1 | | V |
| | V _{CC} = 5 V | 0.8 | 1.4 | | |
| V _{hys} Input hysteresis (V _{IT+} - V _{IT-}) | | | 0.5 | | V |
| I _{off} Output leakage current (except ROUT2B) | FORCEOFF = 0 V | | ±0.05 | ±10 | µA |
| r _i Input resistance | V _I = ±3 V to ±25 V | 3 | 5 | 7 | kΩ |

† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

NOTE 3. Test conditions are C1-C4 = 0.1 µF at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 µF, C2-C4 = 0.33 µF at V_{CC} = 5 V ± 0.5 V.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Note 3)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|--|-----|------|-----|------|
| t _{PLH} Propagation delay time, low- to high-level output | C _L = 150 pF, See Figure 3 | | 150 | | ns |
| t _{PHL} Propagation delay time, high- to low-level output | | | 150 | | |
| t _{en} Output enable time | C _L = 150 pF, R _L = 3 kΩ, See Figure 4 | | 200 | | ns |
| t _{dis} Output disable time | | | 200 | | |
| t _{sk(p)} Pulse skew‡ | See Figure 3 | | 50 | | ns |

† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

‡ Pulse skew is defined as |t_{PLH} - t_{PHL}| of each channel of the same device.

NOTE 3. Test conditions are C1-C4 = 0.1 µF at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 µF, C2-C4 = 0.33 µF at V_{CC} = 5 V ± 0.5 V.

PRODUCT PREVIEW



AUTO-POWERDOWN SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|-------------------------|---|-----------------------|------|-----|------|
| V _{T+(valid)} | Receiver input threshold for <u>INVALID</u> high-level output voltage | | | 2.7 | V |
| V _{T-(valid)} | Receiver input threshold for <u>INVALID</u> high-level output voltage | -2.7 | | | V |
| V _{T(invalid)} | Receiver input threshold for <u>INVALID</u> low-level output voltage | -0.3 | | 0.3 | V |
| V _{OH} | <u>INVALID</u> high-level output voltage | V _{CC} - 0.6 | | | V |
| V _{OL} | <u>INVALID</u> low-level output voltage | | | 0.4 | V |


† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 5)

| PARAMETER | MIN | TYP† | MAX | UNIT |
|----------------------|-----|------|-----|------|
| t _{valid} | | 1 | | μs |
| t _{invalid} | | 30 | | μs |
| t _{en} | | 100 | | μs |

† All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C.

PARAMETER MEASUREMENT INFORMATION

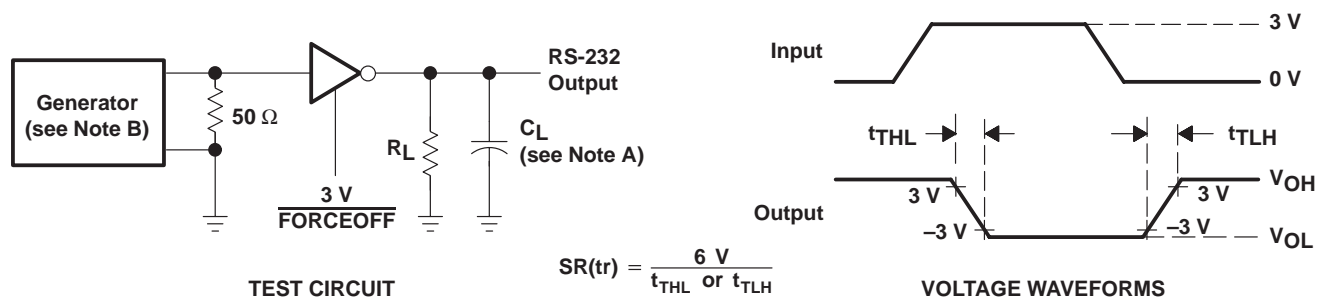

NOTES: A. C_L includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s, Z_O = 50 Ω, 50% duty cycle, t_r ≤ 10 ns, t_f ≤ 10 ns.



Figure 1. Driver Slew Rate

MAX3243

3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER



SLLS350B – APRIL 1999 – REVISED JANUARY 2000

PARAMETER MEASUREMENT INFORMATION

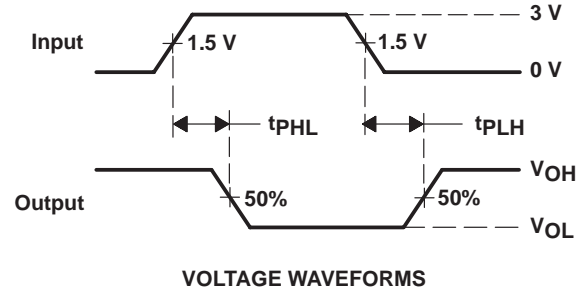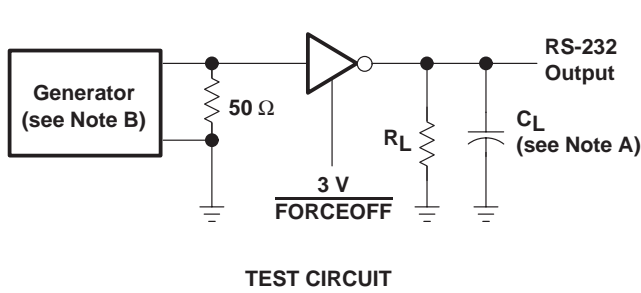



NOTES: A. C_L includes probe and jig capacitance.
 B. The pulse generator has the following characteristics: PRR = 250 kbit/s, $Z_O = 50 \Omega$, 50% duty cycle, $t_r \leq 10$ ns, $t_f \leq 10$ ns.

Figure 2. Driver Pulse Skew

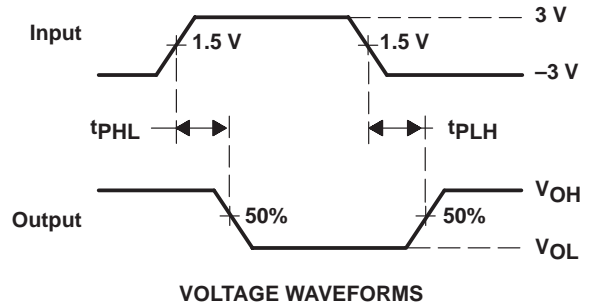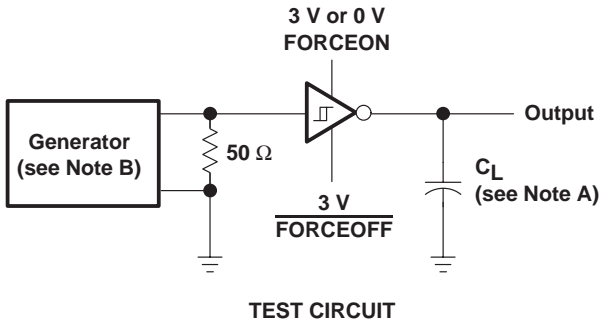

NOTES: A. C_L includes probe and jig capacitance.
 B. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, 50% duty cycle, $t_r \leq 10$ ns, $t_f \leq 10$ ns.

Figure 3. Receiver Propagation Delay Times

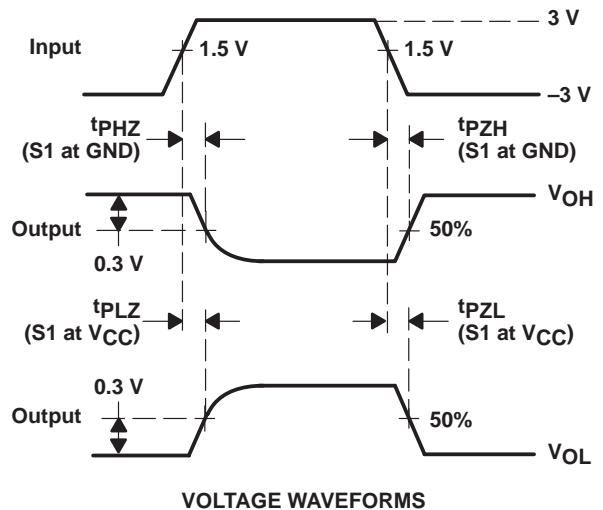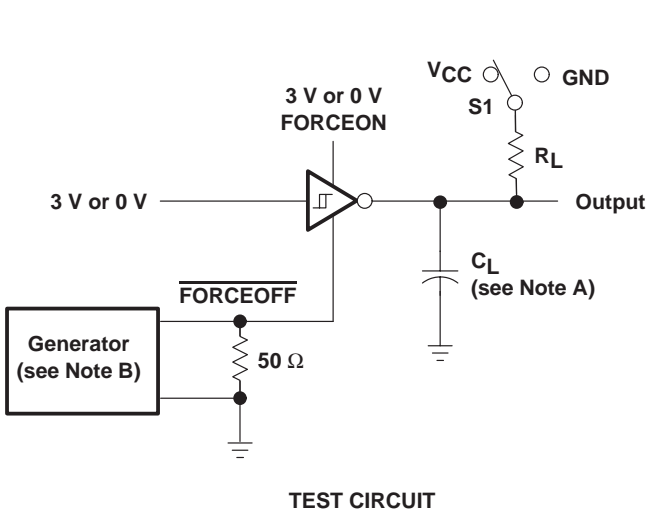


NOTES: A. C_L includes probe and jig capacitance.
 B. The pulse generator has the following characteristics: $Z_O = 50 \Omega$, 50% duty cycle, $t_r \leq 10$ ns, $t_f \leq 10$ ns.
 C. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 D. t_{PZL} and t_{PZH} are the same as t_{en} .

Figure 4. Receiver Enable and Disable Times

PRODUCT PREVIEW



PARAMETER MEASUREMENT INFORMATION

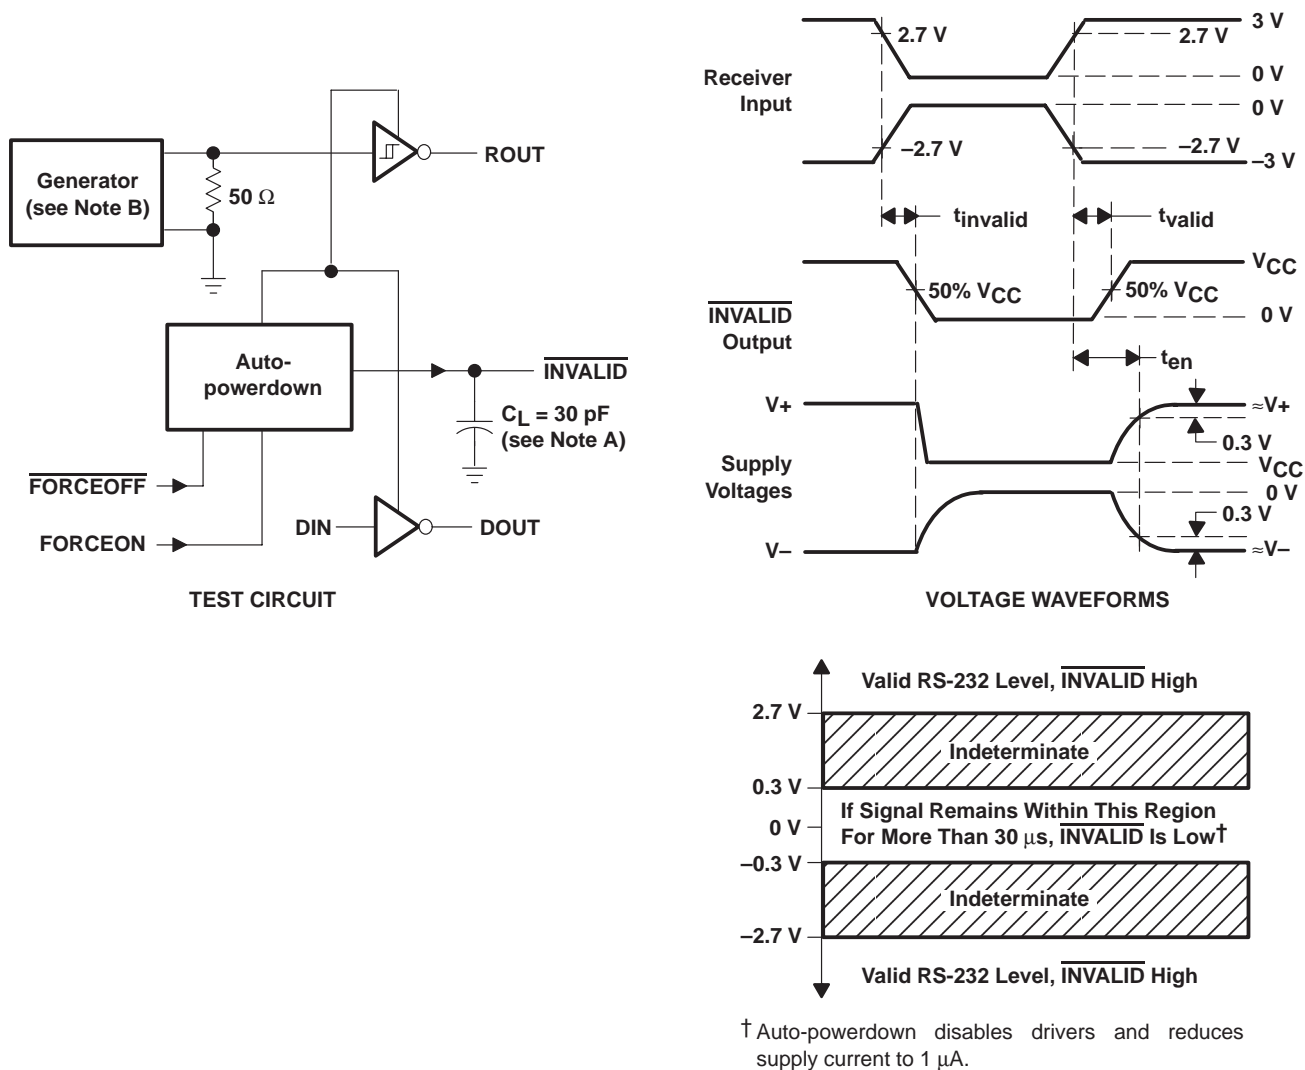

NOTES: A. C_L includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 5 kbit/s, $Z_O = 50 \Omega$, 50% duty cycle, $t_r \leq 10 \text{ ns}$, $t_f \leq 10 \text{ ns}$.


Figure 5. $\overline{INVALID}$ Propagation Delay Times and Supply Enabling Time

PRODUCT PREVIEW

MAX3243 3-V TO 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER

SLLS350B – APRIL 1999 – REVISED JANUARY 2000

APPLICATION INFORMATION

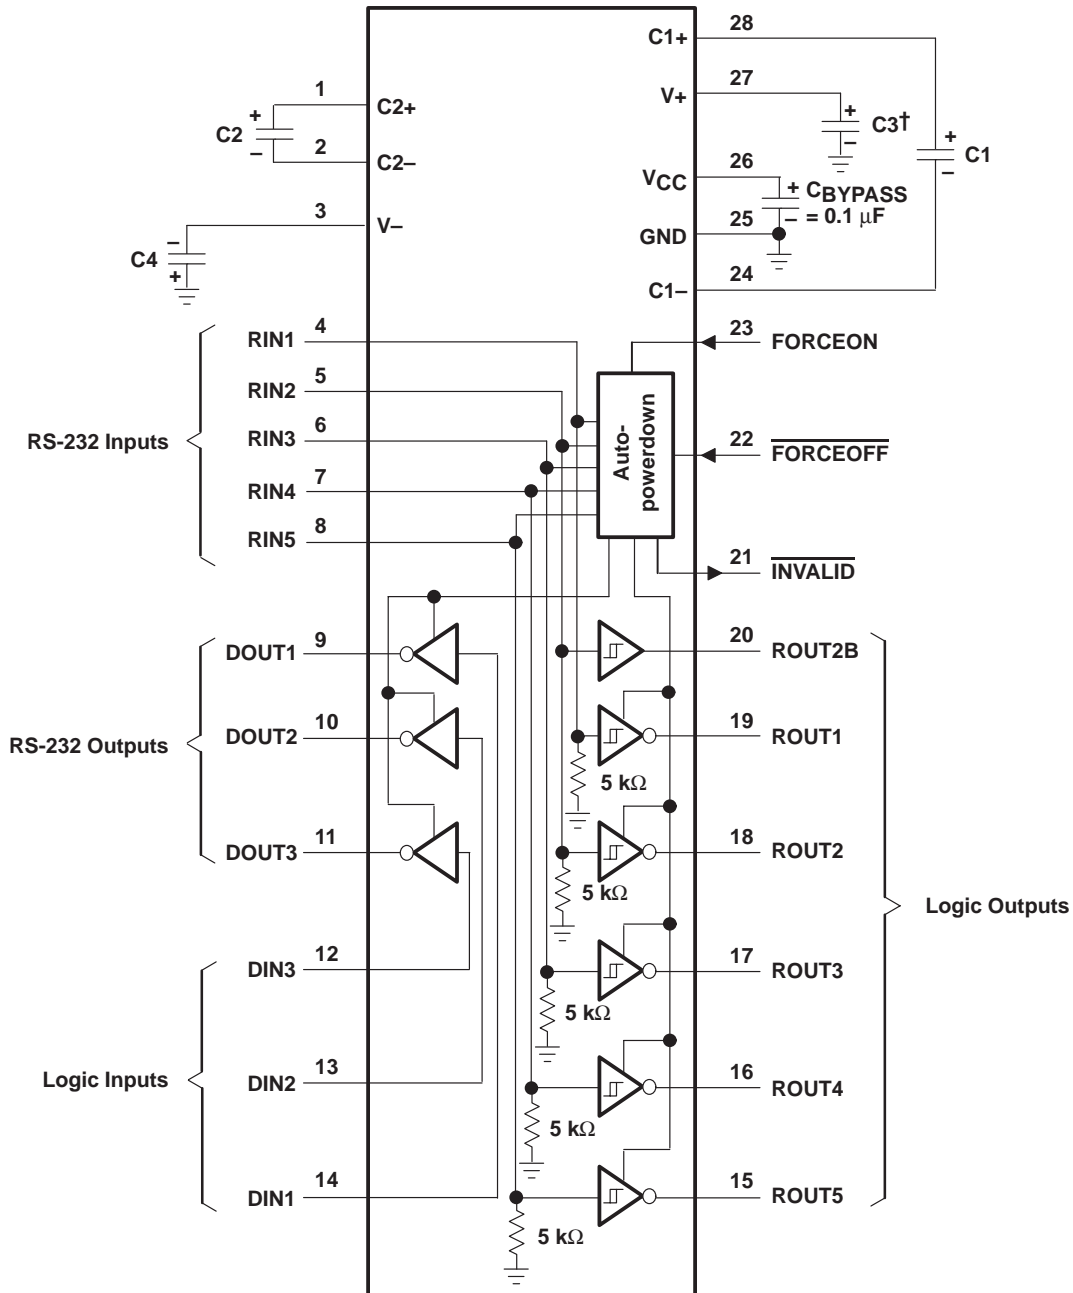

† C3 can be connected to V_{CC} or GND.
NOTE A: Resistor values shown are nominal.

V_{CC} vs CAPACITOR VALUES

| V _{CC} | C1 | C2, C3, and C4 |
|-----------------|----------|----------------|
| 3.3 V ± 0.3 V | 0.1 μF | 0.1 μF |
| 5 V ± 0.5 V | 0.047 μF | 0.33 μF |
| 3 V to 5.5 V | 0.1 μF | 0.47 μF |

Figure 6. Typical Operating Circuit and Capacitor Values

PRODUCT PREVIEW



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.