


**Features**

Fast Switching Speed  
Surface Mount Package Ideally Suited for Automatic Insertion  
For General Purpose Switching Applications  
High Conductance

**Mechanical Data**

Case: SOT-23, Molded Plastic  
Case material - UL Flammability Rating Classification 94V-0  
Moisture sensitivity: Level 1 per J-STD-020A  
Terminals: Solderable per MIL-STD-202, Method 208  
Polarity: See Diagram  
Marking: KJE (See Page 2)  
Weight: 0.008 grams (approx.)

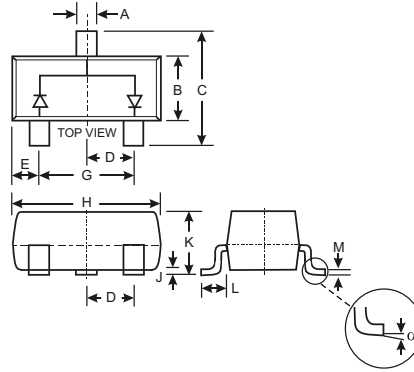

| SOT-23               |       |      |
|----------------------|-------|------|
| Dim                  | Min   | Max  |
| A                    | 0.37  | 0.51 |
| B                    | 1.20  | 1.40 |
| C                    | 2.30  | 2.50 |
| D                    | 0.89  | 1.03 |
| E                    | 0.45  | 0.60 |
| G                    | 1.78  | 2.05 |
| H                    | 2.80  | 3.00 |
| J                    | 0.013 | 0.10 |
| K                    | 0.903 | 1.10 |
| L                    | 0.45  | 0.61 |
| M                    | 0.85  | 0.80 |
|                      | 0     | 8    |
| All Dimensions in mm |       |      |

**Maximum Ratings** @ T<sub>A</sub> = 25 C unless otherwise specified

| Characteristic   | Symbol   | BAV99       | Unit |
|--|--|-------------|------|
| Non-Repetitive Peak Reverse Voltage  | V <sub>RM</sub>  | 100         | V    |
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage | V <sub>RRM</sub><br>V <sub>RWM</sub><br>V <sub>R</sub> | 75          | V    |
| RMS Reverse Voltage  | V <sub>R(RMS)</sub>                                    | 53          | V    |
| Forward Continuous Current (Note 1)  | I <sub>FM</sub>  | 300         | mA   |
| Non-Repetitive Peak Forward Surge Current @ t = 1.0 s<br>@ t = 1.0s                    | I <sub>FSM</sub>                                       | 2.0<br>1.0  | A    |
| Power Dissipation (Note 1)   | P <sub>d</sub>   | 350         | mW   |
| Thermal Resistance Junction to Ambient Air (Note 1)                                    | R <sub>JA</sub>  | 357         | C/W  |
| Operating and Storage Temperature Range  | T <sub>j</sub> , T <sub>STG</sub>                      | -65 to +150 | C    |

**Electrical Characteristics** @ T<sub>A</sub> = 25 C unless otherwise specified

| Characteristic           | Symbol          | Min | Max                           | Unit              | Test Condition   |
|--------------------------|-----------------|-----|-------------------------------|-------------------|--|
| Forward Voltage (Note 2) | V <sub>F</sub>  |     | 0.715<br>0.855<br>1.0<br>1.25 | V                 | I <sub>F</sub> = 1.0mA<br>I <sub>F</sub> = 10mA<br>I <sub>F</sub> = 50mA<br>I <sub>F</sub> = 150mA   |
| Reverse Current (Note 2) | I <sub>R</sub>  |     | 2.5<br>50<br>30<br>25         | A<br>A<br>A<br>nA | V <sub>R</sub> = 75V<br>V <sub>R</sub> = 75V, T <sub>j</sub> = 150 C<br>V <sub>R</sub> = 25V, T <sub>j</sub> = 150 C<br>V <sub>R</sub> = 20V |
| Total Capacitance        | C <sub>T</sub>  |     | 2.0                           | pF                | V <sub>R</sub> = 0, f = 1.0MHz   |
| Reverse Recovery Time    | t <sub>rr</sub> |     | 4.0                           | ns                | I <sub>F</sub> = I <sub>R</sub> = 10mA,<br>I <sub>rr</sub> = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 100                                     |

Notes: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.  
2. Short duration test pulse used to minimize self-heating effect.

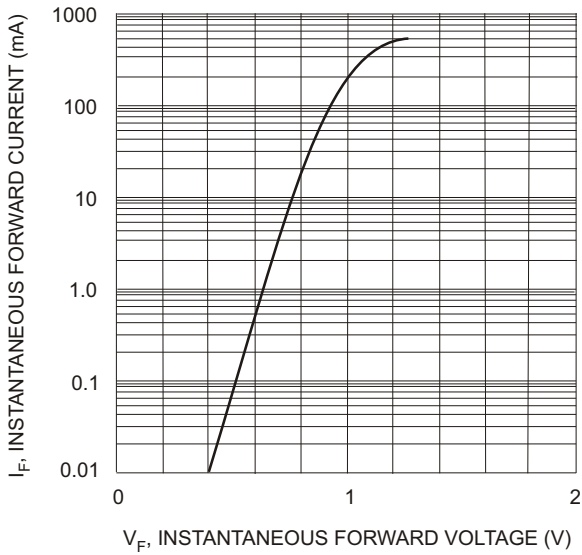


Fig. 1 Forward Characteristics

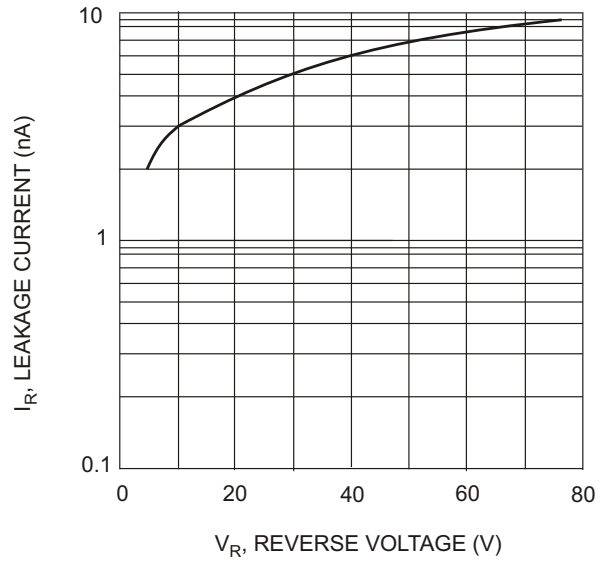


Fig. 2 Typical Leakage Current vs Reverse Voltage

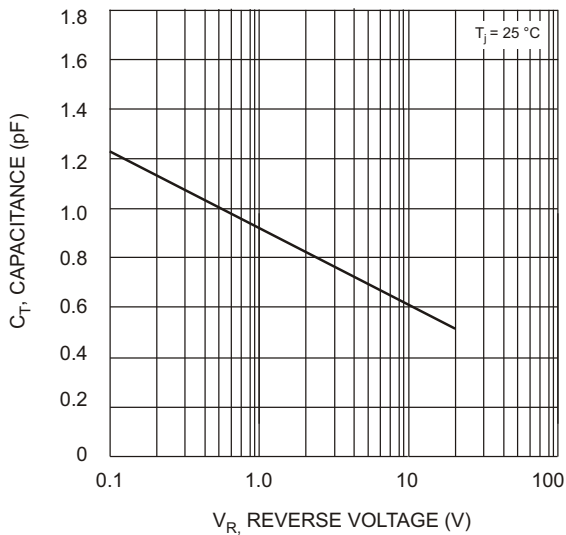



Fig. 3 Typical Total Capacitance vs Reverse Voltage

## Ordering Information (Note 3)

| Device  | Packaging | Shipping         |
|---------|-----------|------------------|
| BAV99-7 | SOT-23    | 3000/Tape & Reel |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



KJE = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year ex: N = 2002  
 M = Month ex: 9 = September

Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 |
|------|------|------|------|------|------|------|------|
| Code | J    | K    | L    | M    | N    | P    | R    |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3     | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |