


### Features

- High Current Capability
- Surge Overload Rating to 50A Peak
- High Case Dielectric Strength of 1500V
- Ideal for Printed Circuit Board Application
- Plastic Material - UL Flammability Classification 94V-0
- UL Listed Under Recognized Component Index, File Number E94661

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Marked on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 Inch-pounds Maximum
- Weight: 3.8 grams (approx)
- Marking: Type Number

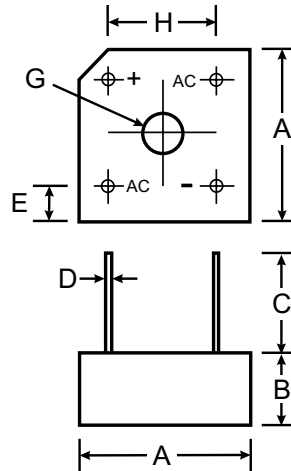

PBPC-3		
Dim	Min	Max
A	14.73	15.75
B	5.84	6.86
C	19.00	—
D	0.76 $\varnothing$ Typical	
E	1.70	3.20
G	Hole for #6 screw	
	3.60	4.00
H	10.30	11.30
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	PBPC 301	PBPC 302	PBPC 303	PBPC 304	PBPC 305	PBPC 306	PBPC 307	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RW</sub> V <sub>R</sub>	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1) @ T <sub>C</sub> = 50°C (Note 2) @ T <sub>C</sub> = 50°C	I <sub>O</sub>	3.0 2.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50							A
Forward Voltage (per element) @ I <sub>F</sub> = 1.5A	V <sub>FM</sub>	1.2							V
Peak Reverse Current @ T <sub>C</sub> = 25°C at Rated DC Blocking Voltage (per element) @ T <sub>C</sub> = 100°C	I <sub>R</sub>	10 1.0							$\mu$ A mA
I <sup>2</sup> t Rating for Fusing (t < 8.3ms) (Note 3)	I <sup>2</sup> t	10							A <sup>2</sup> s
Typical Junction Capacitance (Note 4)	C <sub>j</sub>	55							pF
Typical Thermal Resistance Junction to Case (per element)	R <sub><math>\theta</math>JC</sub>	25							°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-65 to +125							°C

- Notes:
1. Mounted on metal chassis.
  2. Mounted on PC board FR-4 material.
  3. Non-repetitive, for t > 1ms and < 8.3ms.
  4. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

