

Features


- Low temperature coefficient
- Guaranteed temperature stability
- 0.6Ω dynamic impedance
- ±1.0% initial tolerance available
- Easily trimmed for minimum temperature drift



Description

The WS336-5.0 integrated Circuits are precision 5.0V shunt regulators. The monolithic IC voltage references operate as a low temperature coefficient 5.0V zener with 0.6ohm dynamic impedance. A third terminal on the WS336-5.0 allow the reference voltage and temperature coefficient to be trimmed easily. WS336-5.0 are useful as a precision 5.0V low voltage reference for digital voltmeters, power supplies or op amp circuitry. The 5.0V make it convenient to obtain a stable reference from low voltage supplies. Further, since the WS336-5.0 operate as shunt regulators, they can be used as either a positive or negative voltage reference.

Internal Block Diagram

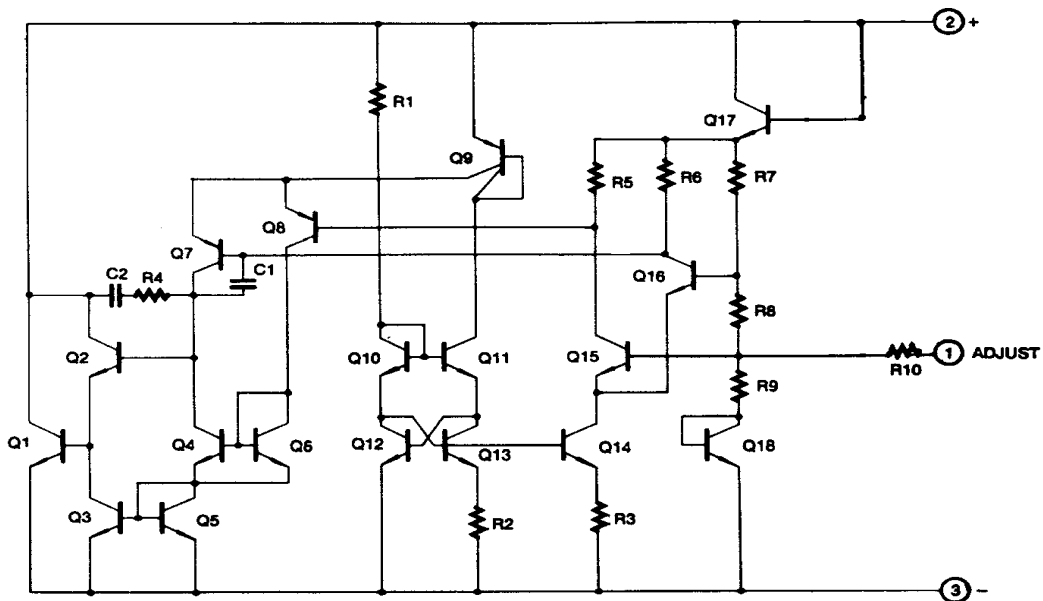

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Reverse Current	I _R	15	mA
Forward Current	I _F	10	mA
Operating Temperature Range KA336-2.5/B	T _{OPR}	0 ~ + 70	°C
Storage Temperature Range	T _{STG}	- 60 ~ + 150	°C

Electrical Characteristics

(0°C < T_A < +70°C, unless otherwise specified)

Parameter	Symbol	Conditions	WS336-5.0						Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Reverse Breakdown Voltage	V _R	T _A = +25°C I _R = 1mA	4.85	5.0	5.15				V
Reverse Breakdown Change with Current	ΔV _R /ΔI _R	T _A = +25°C 600μA ≤ I _R ≤ 10mA	-	6	20				mV
Reverse Dynamic Impedance	Z _D	T _A = +25°C I _R = 1mA	-	0.6	2				Ω
Temperature Stability	ST _T	I _R = 1mA	-	4					mV
Reverse Breakdown Change with Current	ΔV _R /ΔI _R	400μA ≤ I _R ≤ 10mA	-	6	24				mV
Reverse Dynamic Impedance	Z _D	I _R = 1mA	-	0.8					Ω
Long Term Stability In reference voltage	ST	I _R = 1mA	-	20	-				ppm/Khr

Typical Performance Characteristics

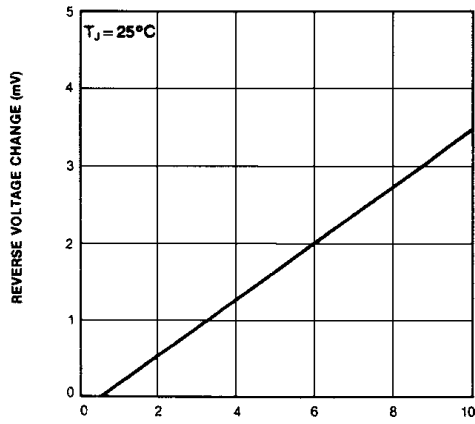


Figure 1. Reverse Voltage Change

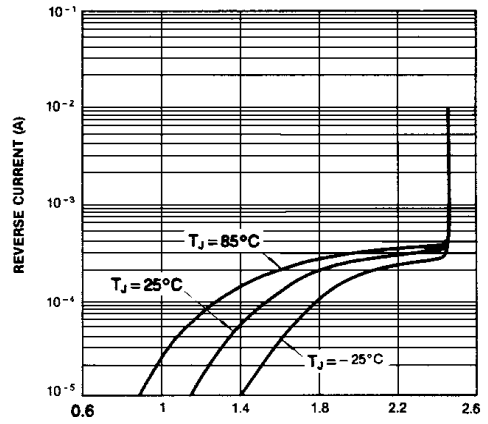


Figure 2. Reverse Characteristics

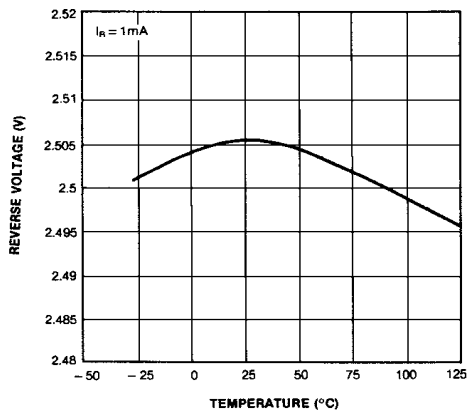


Figure 3. Temperature Drift

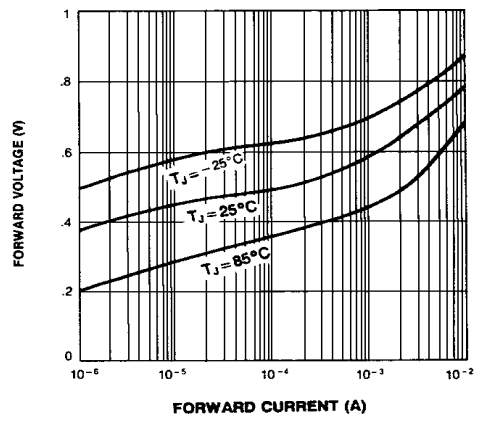


Figure 4. Forward Characteristics