



**Preliminary
QuikPAC Module Data**

**QPP-030
35W, 824-849MHz
Class AB Driver Stage**

General description:

The **QPP-030 QuikPAC™** RF power module is an impedance matched Class AB amplifier stage designed for use in cellular repeater systems. The power transistor is fabricated using Xemod's advanced design LDMOS process. This unit has a factory set, regulated and temperature compensated gate bias, eliminating the need for the user to provide adjustable gate bias voltage circuits and make individual bias adjustments during stage alignment.

Features:

Single Polarity Operation
Matched for 50 Ω RF interfaces
XeMOS FET Technology
Stable Performance
QuikPAC System Compatible
Flange Mounting

Standard Operating Conditions

Parameter	Symbol	Min	Nom	Max	Units
Frequency Range	F	824		849	MHz
Supply (Drain) Voltage	V _D	26.0	28.0	32.0	VDC
Bias (Gate) Voltage	V _G	11.0	12.0	13.0	VDC
Bias (Gate) Current, Average	I _G			20	mA
RF Source & Load Impedance	Ω		50		Ohms
Load Impedance for Stable Operation (All Phases)	VSWR			10:1	
Operating Baseplate Temperature	T _{OP}	-20		+90	°C
Output Device Thermal Resistance, Channel to Baseplate	Θ _{jc}		1.9		°C/W

Maximum Ratings

Parameter	Symbol	Value	Units
Supply (Drain) Voltage	V _D	35	VDC
Control (Gate) Voltage, V _D = 0 VDC	V _G	15	VDC
Input RF Power	P _{IN}	2.5	W
Load Impedance for continuous operation without damage	VSWR	3:1	
Output Device Channel Temperature		200	°C
Lead Temperature during reflow soldering		+210	°C
Storage Temperature	T _{STG}	-40 to +100	°C

Performance at 28VDC & 25°C

Parameter	Symbol	Min	Nom	Max	Units
Supply (Drain) Voltage	V _{D1,2}	27.8	28.0	28.2	VDC
Quiescent Current (total) (1)	I _{DQ}	270	300	330	mA
Power Output at 1 dB Compression (single tone)	P ₋₁	35	40		W
Gain at 7W PEP (two tone)	G	15.0	16.0		dB
Gain Variation over frequency at 7W Output (two tone)	ΔG		0.2	0.5	dB
Input Return Loss (50 Ω Ref) at 7W PEP (two tone)	IRL	12.0	18.0		dB
Drain Efficiency at 35W PEP (two tone)	η	32	35		%
3 rd Order IMD Product (2 tone at 35W PEP; 1 MHz spacing)			-29	-27	dBc

XEMOD RESERVES THE RIGHT TO MAKE CHANGES TO THIS SPECIFICATION WITHOUT FURTHER NOTICE. BEFORE THE PRODUCT DESCRIBED HERE IS WRITTEN INTO SPECIFICATIONS OR USED IN CRITICAL APPLICATIONS, THE PERFORMANCE CHARACTERISTICS SHOULD BE VERIFIED BY CONTACTING XEMOD.

Performance at 28VDC & 25°C (continued)

Parameter	Symbol	Min	Nom	Max	Units
IMD Variation – 100 kHz to 25 MHz tone spacing			1.0	2.0	dB
2 nd Harmonic at 35W P _{out} (single tone)			-40		dBc
3 rd Harmonic at 35W P _{out} (single tone)			-45		dBc
Group (Signal) Delay	τ_d		3.5		ns
Transmission Phase Flatness			0.5		degrees
CDMA ACPR at 7W P _{avg}			-45		dB
CDMA ACPR at 3.5W P _{avg}			-48		dB
Drain Efficiency at 7W CDMA	η	20	23		%
Drain Efficiency at 3.5W CDMA	η	12	14		%

Performance at 28VDC Over Temperature

Parameter	Symbol	Min	Nom	Max	Units
Power Output at 1 dB Compression (single tone)	P ₋₁				W
Gain Variation over frequency at 7W Output (single tone)	ΔG				dB
Input Return Loss (50 Ω Ref) at 7W PEP (two tone)	IRL	12.0	15.0		dB
Drain Efficiency at 35W PEP (two tone)	η				%
3 rd Order IMD Product (2 tone at 35W PEP; 1 MHz spacing)			-28	-26	dBc
Group (Signal) Delay	τ_d		3.5		ns
Transmission Phase Flatness			0.5		degrees

Notes:

This GR-version QuikPAC module has an internally regulated gate voltage that is preset at the factory. A voltage of +12VDC ($\pm 1V$) should be applied to the gate lead (pin 3). No further adjustment is required. The gate voltage is thermally compensated for operation over the temperature range listed in the data sheet. Although the module will operate with lower voltages applied, the internal regulator is not functioning and the specified performance may not be achieved.

Gate voltage must be applied coincident with or after application of the drain voltage to prevent potentially destructive oscillations. Bias voltages should never be applied to a module unless it is terminated on both input and output.


The quiescent current set during manufacture will be within the range specified in the Performance section (nominal $\pm 10\%$) and is selected to balance IMD, input return loss, and efficiency. This setting is suitable for most applications. Modules with different optimization profiles are available by special order.

Internal RF decoupling is included on all bias leads. No additional bypass elements are required, however some applications may require energy storage on the drain leads to accommodate time-varying waveforms.

The RF leads are internally protected against DC voltages up to 100V. Care should be taken to avoid video transients that may damage the active devices.

Package Styles

This model is available in the A1F (H10890) package style.

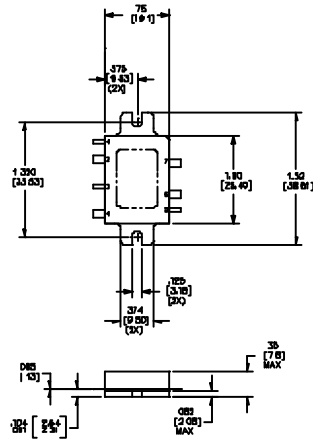

LEAD IDENTIFICATION	
Lead No.	Function
1	RF Input
2	Ground
3	V _{cc}
4	V _{ref}
5	RF Output
6	Ground
7	Ground

DIMENSIONS ARE INCHES (MM).