


Features

- Fast Switching Speed
- Ultra-Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance


Mechanical Data

- Case: SOT-353 and SOT-363, Molded Plastic
- Case Material - UL Flammability Rating Classification 94V-0
- Terminals: Solderable per MIL-STD-202, Method 208
- Orientation: See Diagram
- Marking: See Diagram
- Weight: 0.006 grams (approx.)

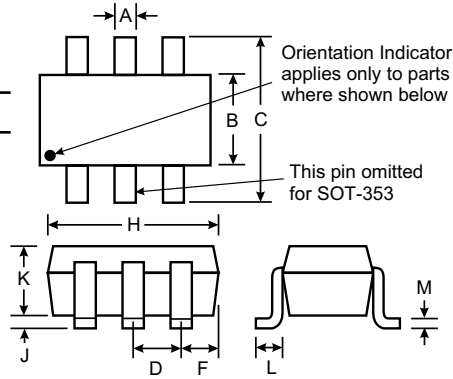


SOT-363/SOT-353		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25


All Dimensions in mm




Marking: KA4
MMBD4448HCQW




Marking: KA5
MMBD4448HAQW




Marking: KA6
MMBD4448HADW



Marking: KA7
MMBD4448HCDW



Marking: KAB
MMBD4448HSDW



Marking: KAA
MMBD4448HTW

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
Peak Repetitive Reverse Voltage	V _{RRM}	80	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _R		
RMS Reverse Voltage	V _{R(RMS)}	57	V
Forward Continuous Current	I _{FM}	500	mA
Average Rectified Output Current	I _O	250	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs	I _{FSM}	4.0	A
@ t = 1.0s		2.0	
Power Dissipation (Note 1)	P _d	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	625	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	V _{BR(R)}	80	—	V	I _R = 100μA
Maximum Forward Voltage (Note 2)	V _{FM}	0.62 — —	0.72 0.855 1.0 1.25	V	I _F = 5.0mA I _F = 10mA I _F = 100mA I _F = 150mA
Maximum Peak Reverse Current (Note 2)	I _{RM}	—	100 50 30 25	nA μA μA nA	V _R = 70V V _R = 75V, T _j = 150°C V _R = 25V, T _j = 150°C V _R = 20V
Junction Capacitance	C _j	—	3.5	pF	V _R = 6, f = 1.0MHz
Reverse Recovery Time	t _{rr}	—	4.0	ns	V _R = 6V, I _F = 5mA


Notes: 2. Short duration pulse test used to minimize self-heating effect.

Ordering Information (Note 3)


Device	Packaging	Shipping
MMBD4448HADW-7 MMBD4448HAQW-7 MMBD4448HCDW-7 MMBD4448HCQW-7 MMBD4448HSDW-7 MMBD4448HTW-7	SOT-363 SOT-363 SOT-363 SOT-353 SOT-363 SOT-363	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.


Marking Information

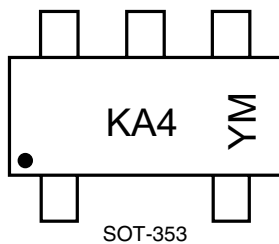

KA4 = Product Type Marking Code, KA4 = MMBD4448HCQW
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

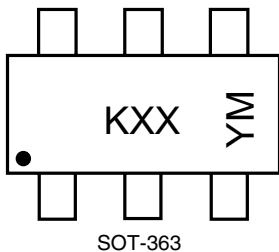

KXX = Product Type Marking Code, ex. KA5 = MMBD4448HAQW
KAA = MMBD4448HTW
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September

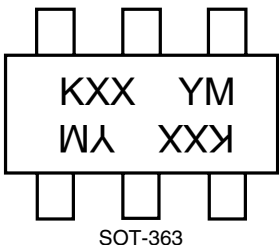


KXX = Product Type Marking Code, ex. KA6 = MMBD4448HADW
KA7 = MMBD4448CDW
KA8 = MMBD4448HSDW
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September


Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004
Code	J	K	L	M	N	O	P


Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

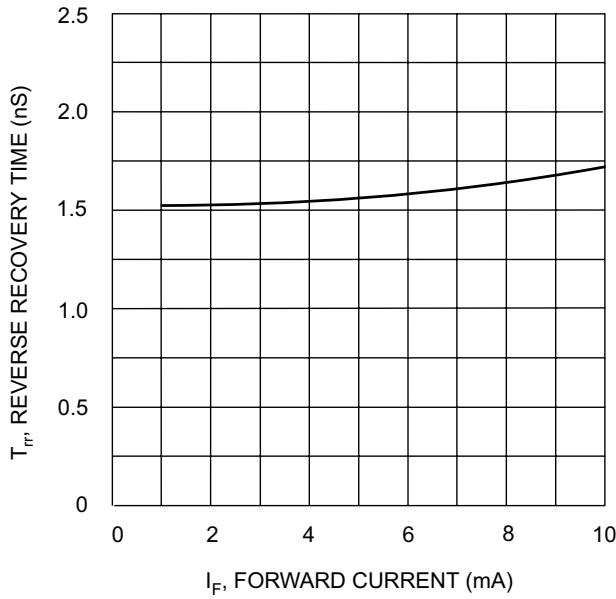


I_F , FORWARD CURRENT (mA)
Fig. 1. Reverse Recovery Time vs. Forward Current

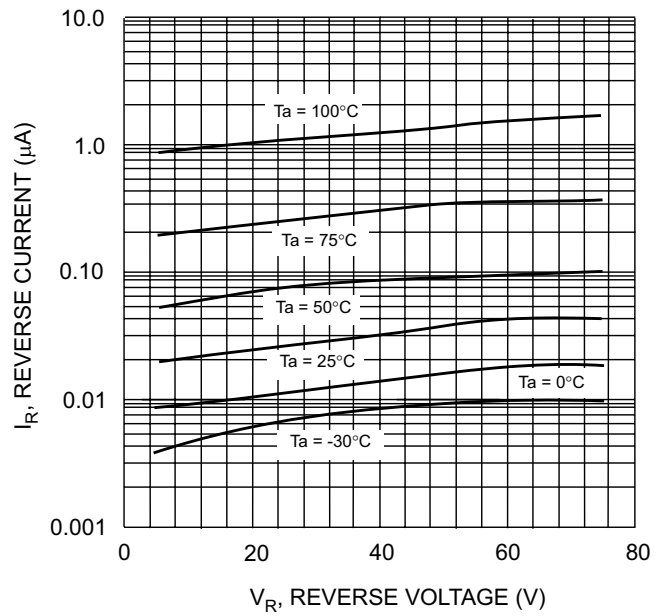

V_R , REVERSE VOLTAGE (V)
Fig. 2. Reverse Current vs Reverse Voltage

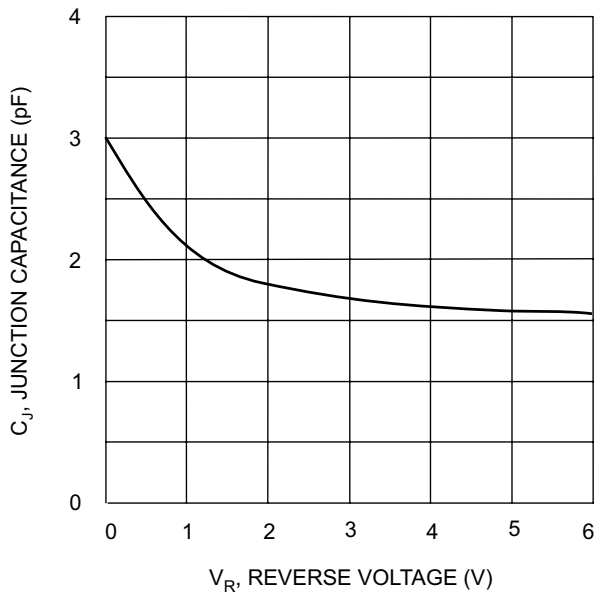

V_R , REVERSE VOLTAGE (V)
Fig. 3. Typical Junction Capacitance vs. Reverse Voltage

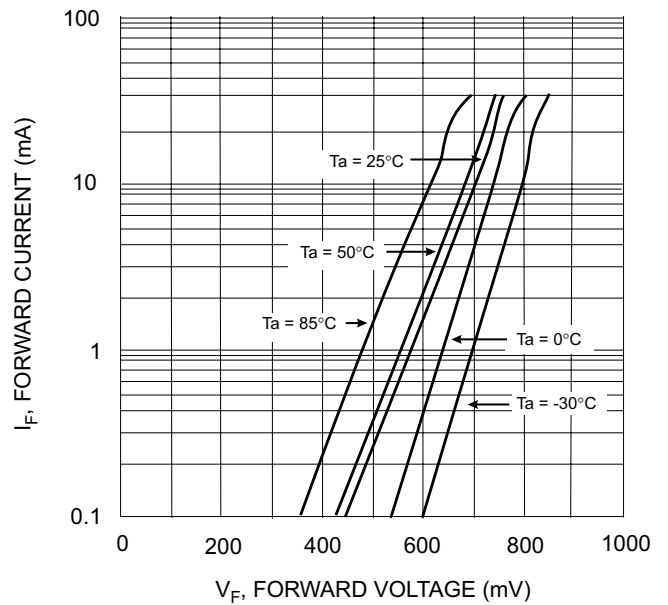

V_F , FORWARD VOLTAGE (mV)
Fig. 4. Forward Current vs. Forward Voltage